



DA-21

Optical Audio converter With 3.5 AUX and L/R outputs

The **DA-21** is an audio converter that converts optical/toslink audio signals to L/R and 3.5mm AUX. It supports audio formats like PCM / LPCM 2.0 Channel with sampling rates up to 96 KHz. This device is designed for people with older sound systems and speakers. This device does not support CEC, please note that the volume of the speakers or the sound system cannot be controlled with the TV's remote. Compact design with easy installation. Perfect for personal and commercial setups.

DIMENSIONS & WEIGHT:
Length: 55mm/2.17in **Width:** 60mm/2.36in
Height: 20mm/0.79in **Weight:** 78g/2.75oz

PACKAGE CONTENTS: 1x DA-21, 1x Power Adapter, User Manual

KEY FEATURES:

- Converts Optical audio signals to 3.5mm AUX and L/R
- It supports audio formats like PCM / LPCM 2.0 Channel
- It supports sampling rates up to 96KHz, depending on the audio input format.
- The unit features an optical input port, a power switch, an LED indicator, a 3.5mm AUX port & an RCA L/R port.
- Compact design with easy installation. Perfect for personal and commercial uses.

AUDIO SUPPORT:

L/R Audio Formats : LPCM 2.0

POWER:

Power Consumption : 1W (Max)
Power Supply: Input : AC 100-240V 50/60Hz
Output : DC 5V/1A

SPECIFICATIONS

CONNECTIVITY:

INPUT:	1 × HDMI [Type A, 19-pin female]
	1 × Optical Output [S/PDIF]
OUTPUT:	1 × L/R [3.5mm Stereo Mini-jack]
	2 × L/R [RCA]

SUPPORTED HDMI CABLES:

HDMI 2.0/2.1	: We recommend using high quality HDMI 2.0/2.1 cables under 30 feet for optimum performance
--------------	---


ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No





CONNECTION DIAGRAM

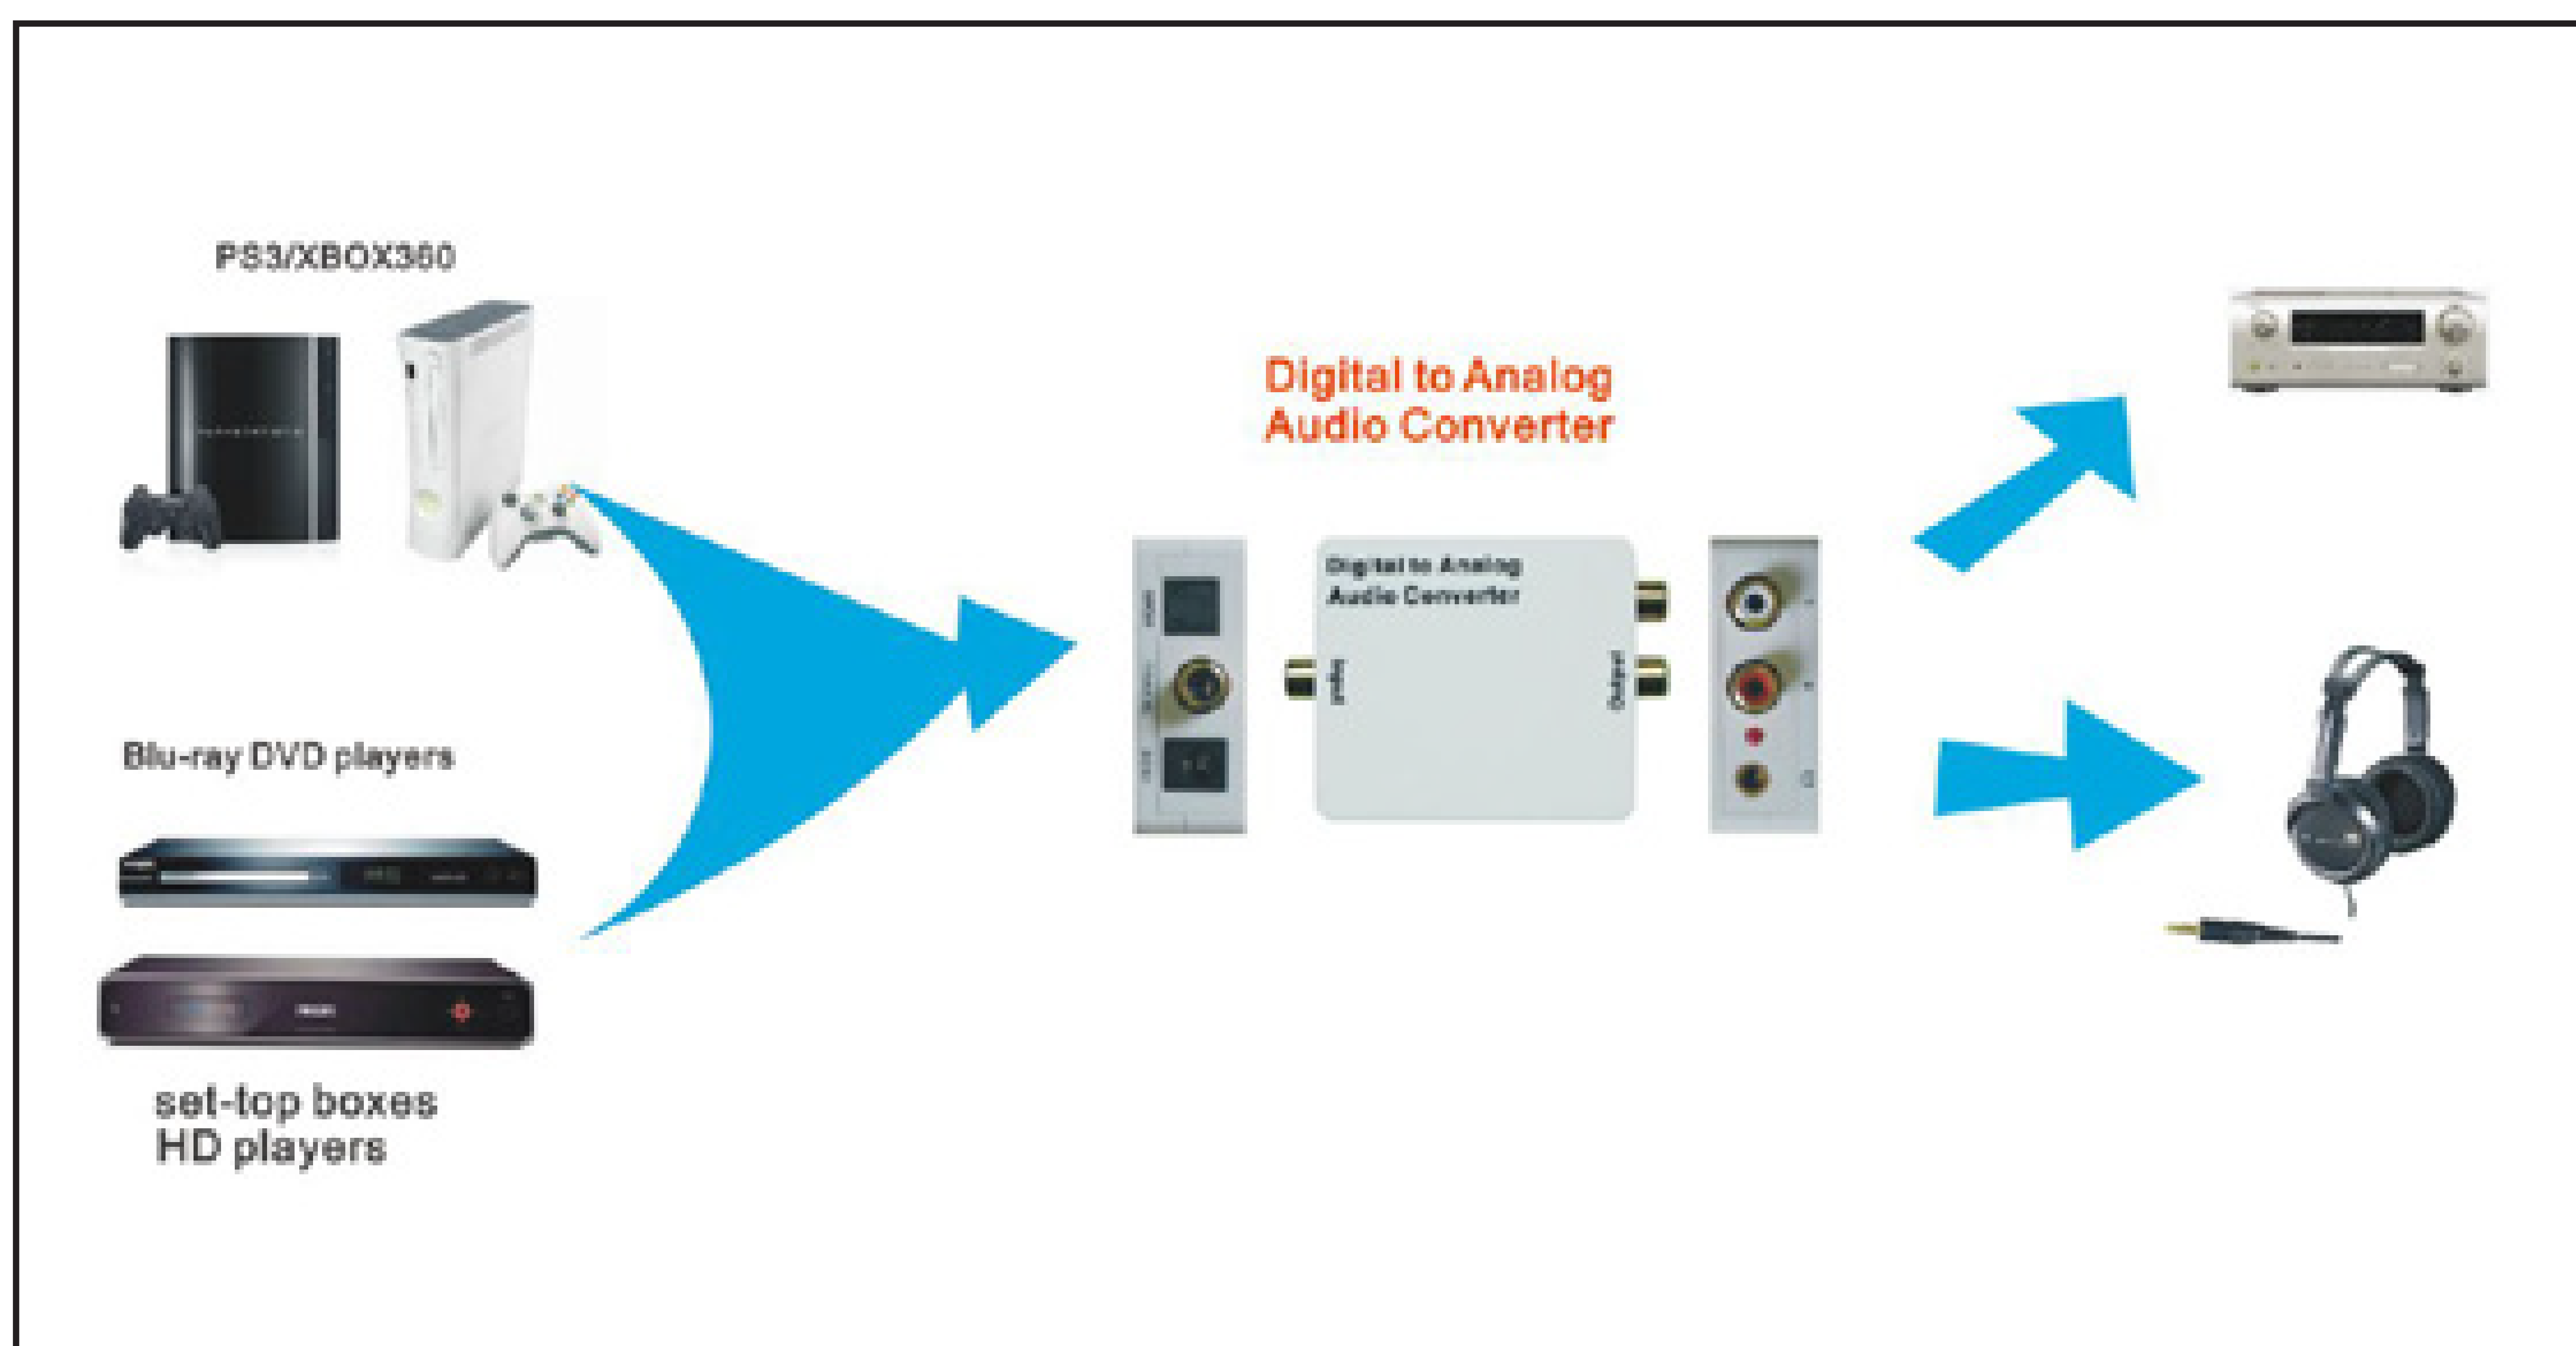

OVER 10 YEARS
EXPERIENCE

