

ONCAM C-12 Outdoor Plus

38501



Key Features

Industry Leading Frame Rates

Capture every movement in sharp detail with market leading 55 fps at full 9MP resolution or maintain your chosen frame rate up to 30 fps on primary stream with 3 other streams running. Alternatively, experience best in class performance of 25 fps with TrueDetail HDR.

Streamlite Compression Technology

Lower bandwidth and storage by an average of 50% or more on both H.264 and H.265, and over 90% when there is no motion and Dynamic FPS is enabled. Integrated VMS / NVR partners have access to StreamLite+, and can achieve an additional 20% thanks to ColorMap Compression¹.

Truedetail HDR Technology

Reveal the lost details in both dark and bright areas of the same scene. Correctly expose every detail with dual concurrent exposures.

Advanced Light Management Technology

Dynamically manage the available light to optimize image quality to produce clearer, full-color, lower noise videos. Maintain the sharpness of static or moving objects in challenging low and mixed light conditions.

Multi-Mode

Simultaneously stream up to four different views from a choice of five (inc. dewarped views)².

Analytics


Motion Region Detector, Tampering, Loitering Object Detector, Line Crossing,/Counting, Region Object Detector, Object Tracking Only, and Region Object Occupancy.

Feature-rich Surveillance

- ▶ Powerful, robust and feature-rich 12MP camera, built upon Oncam's expertise in 360-degree IP video technology
- ▶ Crisp images in tough external conditions
- ▶ IP66, IP67, IP68, IP69K and IK10 rated, offering protection in harsh environments and against vandalism.
- ▶ Edge dewarping for additional streaming flexibility (Fisheye only, Panoramic+ only or Multi-Mode²)
- ▶ Plus Board features make the camera perfect for more demanding installations
- ▶ Range of mounting options and accessories for added versatility, including Panoramic+ Tilt Adaptor and rainguard
- ▶ Optional Heater Module for cold starting in temperatures as low as -40°C / -40°F
- ▶ Market leading 3D dewarping software supported by major VMS / NVR partners
- ▶ 5-year warranty

Plus Board Features

- ▶ 8-28 VDC support
- ▶ Alarm I/O support x2 in x1 out
- ▶ LED Lamp support x2
- ▶ Audio support

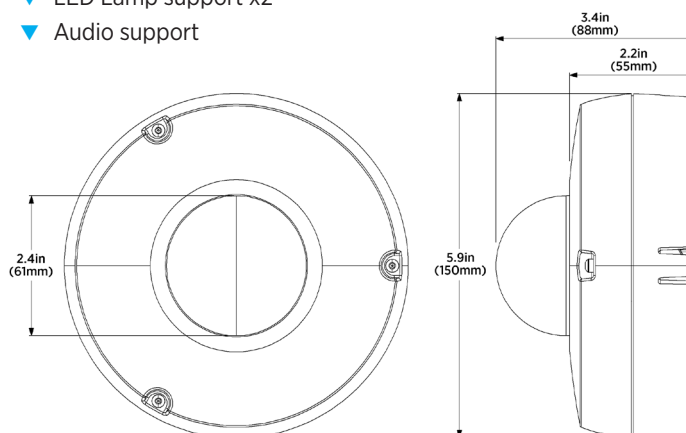

ONCAM

ONCAM C-12 Outdoor Technical Specifications

GENERAL

Field of view	180° Horizontal, 180° Vertical
Image sensor	12.4MP (approx.) CMOS sensor
Lens	180°, all-glass, fixed focus fisheye
Day/Night IR cut filter	Automatic, manual
Minimum illumination	0.1 lux at 50 IRE F/2.0
Video motion detection	16 configurable polygonal regions
External alarm	2x contact input 1x contact output
External LED control	2x contact output
Audio input	Audio IN through screw terminal connections, G.711/AAC codec
Audio input level	MIC input level range is approximately 5 mV to 50 mV
Analytics	Motion Region Detector, Tampering, Loitering Object Detector, Line Crossing/Counting, Region Object Detector, Object Tracking Only, Region Object Occupancy
Advanced event management	Configurable Triggers: Motion regions, External contact input, Network message, Link down Configurable Actions: External contact output, SMTP (snapshot), Local recording, LED output
Networking	IPv4, TCP/IP, UDP, HTTP, DHCP, DNS, NTP, SMTP, RTP, RTSP, WEB RTC, RTCP, HTTPS, WS-Discovery, TLS, ARP and SNMP v2c or V3
Privacy	5 configurable privacy regions/masks
SD card	Built in MicroSD card slot, up to 512GB (FAT32), minimum class 10
White balance Range	Auto White Balance (Range = approx. 2,500 K - 8,000 K)
Security	Password protection, WS-Username token, RTSP authentication, HTTP Digest authentication, Authorization levels, Brute force protection, IP address filtering, User access log, Encrypted TLS 1.2, HTTPS encryption, IEEE 802.1x Authentication, EAP-MD5, EAP-TLS, EAP-PEAP

VIDEO

Frame rate	max 55 fps at full resolution ³ or 25 fps with TrueDetail HDR
Video compression	H.264, H.265, MJPEG and VP8 (WEB RTC)
Smart compression	StreamLite H.264 and H.265 StreamLite+ H.264 and H.265 (with ColorMap compression ¹)
Fisheye stream 1 (Primary - 360° Fisheye Stream H.264/H.265)	55 fps ³ : 2992 x 2992 (9.0 MP, max resolution) 30 fps when multi-streaming ⁴ Up to 60 fps ³ : 2800 x 2800 (7.8 MP) 2304 x 2304 (5.3 MP) 1920 x 1920 (3.7 MP) 1440 x 1440 (2.1 MP) 992 x 992 (0.98 MP) 512 x 512 (0.26 MP) ¹
Fisheye stream 2⁶ (Secondary - 360° Fisheye Stream H.264/H.265)	Up to 15 fps: 2992 x 2992 (9.0 MP, max resolution) 2800 x 2800 (7.8 MP) 2304 x 2304 (5.3 MP) 1920 x 1920 (3.7 MP) 1440 x 1440 (2.1 MP) 992 x 992 (0.98 MP) 512 x 512 (0.26 MP) ⁵
Fisheye stream 3 (Tertiary - 360° Fisheye Stream H.264/H.265)	Up to 30 fps: 1920 x 1920 (3.7 MP, max resolution) 1440 x 1440 (2.1 MP) 992 x 992 (0.98 MP) 512 x 512 (0.26 MP) ⁵
Fisheye stream 4 (Low resolution - 360° Fisheye Stream H.264/H.265/MJPEG)	Up to 10 fps: 512 x 512 (0.26 MP, max resolution) ⁵

Camera modes²	Fisheye only, Panoramic+ only, Multi-Mode
Multi-stream capacity	4 multiple streams can run concurrently. Primary stream maintains a frame rate of 30 fps ⁴
Dewarped views²	Panoramic+ (180° view): 3040x1216 to 800x320 Corridor+ (ceiling split corridor view): 2432x1520 to 640x400 T Corridor+ (three-way split corridor view): 3456x1440 to 960x400 VCam (up to 4): 1280x720 to 576x432
Image settings	Brightness, contrast, saturation, sharpness, exposure compensation, exposure priority, imaging preference, text overlay, 180° rotate, multiple color spaces
Image enhancement	TrueDetail HDR up to 25 fps. TrueDetail HDR maximum dynamic range 120dB
PTZ functionality	10x zoom with Oncam 3D client-side dewarping software
VMS/NVR support	ONVIF Profile S, G and T conformant. Contact Oncam for the up-to-date VMS compatibility list
Web browser compatibility	Supported minimum browsers versions: Chrome 89, Firefox 87, Edge 90 and Safari 14.0.3
Unicast	Up to 20 simultaneous users depending on the resolution settings
Multicast	Supported for all streams (Audio, Video and Metadata ²)
Bit rate control	Fixed Quality (Capped Bitrate) or Constant Bit Rate

ELECTRICAL

Ports	RJ45 for 100/1000BASE-Tx
Power input	12 V $\Rightarrow$ 1.08 A (15 W LPS, NEC Class 2) 48 V $\Rightarrow$ 0.27 A (PoE 802.3af, Class 0)
Power consumption (maximum)	12 V $\Rightarrow$ < 12.95 W PoE < 12.95 W

MECHANICAL

Camera mount	Surface and Pendant
Weight	1.00 kg (2.20 lb)
Dimensions (DxWxH)	150 x 150 x 88 mm (5.9 x 5.9 x 3.4 in)

ENVIRONMENTAL

Operating temperature range	-40 °C to +55 °C (-40 °F to +131 °F)
Cold start temperature range	-20 °C to +55 °C (-4 °F to +131 °F)
Cold start temperature range with optional heater (CA-GHMI-O)	-40 °C to +55 °C (-40 °F to +131 °F)
Humidity	95% RH, non-condensing
Ingress protection	IP66, IP67, IP68 and IP69K
Impact resistance	IK10

CERTIFICATIONS

Regulatory Model	C12-OPCI-O
Approvals	IEEE802.3af CE AS/NZS CISPR 32:2015 EN 55032: 2015+AC:2016, Class B EN 55035:2017 FCC ICES-003 Issue 6-2016, Class B UL/cUL 62368-1 UL60950-part 22 RoHS REACH IP66, IP67, IP68, IP69K and IK10 BIS ISI3252(Part1), IEC 60950-1 NEMA Type 4 & 6 NOM

ONCAM C-12 Outdoor Optional Accessories

OUTDOOR PENDANT KIT

Pendant Mount Adaptor




Sunshield



Part Number	38504 (for both pieces)
Thread	1½" NPT Male
Construction	ADC12 Aluminium
Form factor	Low profile
Installation	Pendant mount
Weight	0.20 kg (0.44 lb)
Dimensions	Ø145 mm (Ø5.7 in)

Construction	ADC12 Aluminium
Installation	Pendant mount
Weight	0.26 kg (0.57 lb)
Dimensions	Ø170 mm (Ø6.7 in)
Assembled	

HEATER MODULE




Part Number	38505
Regulatory Model	C12-OPC1-0
Installation	Base of camera module
Operating temperature	As low as -40°F/°C
Functionality	Automatic on/off
Weight	0.05 kg (0.11 lb)
Dimensions	68 mm (2.7 in)

POLE MOUNT BRACKET



Part Number	34491
Thread	1½" NPT Female
Construction	Aluminium
Weight	0.61 kg (1.34 lbs)
Dimensions (D x W x H)	265 x 130 x 114 mm (10.4 x 5.1 x 4.5 in)

WALL MOUNT BRACKET



Part Number	34493
Thread	1½" NPT Female
Construction	Aluminium
Weight	0.41 kg (0.9 lb)
Dimensions (D x W x H)	150 x 94 x 114 mm (5.9 x 3.7 x 4.5 in)

CORNER WALL BRACKET



Part Number	34487
Thread	1½" NPT Female
Construction	Aluminium
Weight	0.62 kg (1.36 lbs)
Dimensions (D x W x H)	295 x 185 x 114 mm (11.6 x 7.3 x 4.5 in)

PANORAMIC+ TILT ADAPTOR²



Part Number	40034
Angle	0° to 90°
Thread	1½" NPT Male to mounting bracket, Female to pendant mount
Construction	Aluminium
Weight	0.28 kg (0.61 lbs)
Dimensions (D x W x H)	57 x 70 x 116 mm (2.2 x 2.8 x 4.6 in)

PANORAMIC+ RAIN GUARD²



Part Number	40033
Mounting	Surface or Pendant
Construction	Polymer
Weight	0.06 kg (0.13 lb)
Dimensions (D x W x H)	114 x 170 x 180 mm (4.5 x 6.7 x 7.1 in)

¹ Dependent on VMS support

² Firmware version 2.0.x and above required

³ High Speed Mode², single stream only, set to 60 fps, exposure priority set to frame rate, 60Hz
Max achievable fps is dependant on VMS support

⁴ Maintain 30 fps ±5%. 25 fps in TrueDetail HDR Mode, 60Hz

⁵ MJPEG at 10 fps, <5,000 kbps supported

⁶ Resolution and video source view shared with Primary Stream in TrueDetail HDR Mode

© Copyright 2021 ONVU Technologies AG. All rights reserved. Oncam is a trading name of ONVU Technologies AG. Specifications and configurations subject to change without notice. "ONCAM" and the "ONCAM logo" are trademarks, and in some cases registered or protected trademarks, of Oncam Global Limited and/or Oncam Global, Inc., including under registration in the UK, India and in the U.S. Patent and Trademark Office. All other trademarks are the property of their respective owners.

North America 1 800 563 5564
Latin America +5255 5259 9511
Europe +39 0362 17935
Asia +65 6818 0963
Australia and New Zealand +61 1300 089 419
Middle East and Africa +971 4 399 5525

© 2025 March Networks. All rights reserved. Information in this document is subject to change without notice. MARCH NETWORKS, March Networks Command, March Networks Searchlight, March Networks RideSafe, and the MARCH NETWORKS logo are trademarks of March Networks Corporation. All other trademarks are the property of their respective owners. 060-3428-00-G
marchnetworks.com

MARCH
networks
A Delta Group Company