

ONCAM C-08 Indoor



40216



Key Features

Multi-Mode

Simultaneously stream up to four different views from a choice of five (inc. dewarped views)¹.

Industry Leading Frame Rates

Capture every movement in sharp detail with market leading 60 fps at full 4.7MP resolution or maintain your chosen frame rate up to 30 fps on primary stream with 3 other streams running. Alternatively experience best in class performance of 30 fps with TrueDetail HDR.

Streamlite Compression Technology

Lower video bandwidth and storage by an average of 50% or more on both H.264 and H.265, and over 90% when there is no motion and Dynamic FPS is enabled. Integrated VMS / NVR partners have access to StreamLite+, and can achieve an additional 20% thanks to ColorMap Compression².

Truedetail HDR Technology

Reveal the lost details in both dark and bright areas of the same scene. Correctly expose every detail with dual concurrent exposures.

Advanced Light Management Technology


Dynamically manage the available light to optimize image quality to produce clearer, full-color, lower noise videos. Maintain the sharpness of static or moving objects even in challenging low and mixed light conditions.

Analytics

Motion Region Detector, Tampering, Loitering Object Detector, Line Crossing,/Counting, Region Object Detector, Object Tracking Only, and Region Object Occupancy.

Compact 8MP Surveillance

- ▼ Powerful, compact camera with a diameter of only 92mm, built upon Oncam's expertise in 360-degree IP video technology
- ▼ Multi-core CPU, high sensitivity 8MP sensor, and Oncam's latest cutting-edge technologies for detailed crisp images
- ▼ Edge dewarping for additional streaming flexibility (Fisheye only, Panoramic+ only or Multi-Mode¹)
- ▼ Clean, modular low profile design for quick, simple and intuitive installation
- ▼ Support for both terminated RJ45 and unterminated cabling, with punch down connectivity option
- ▼ Variety of mounting options, including Recessed, Pendant and Panoramic+ Tilt Mount
- ▼ Market leading 3D dewarping software supported by major VMS / NVR partners
- ▼ 5-year warranty

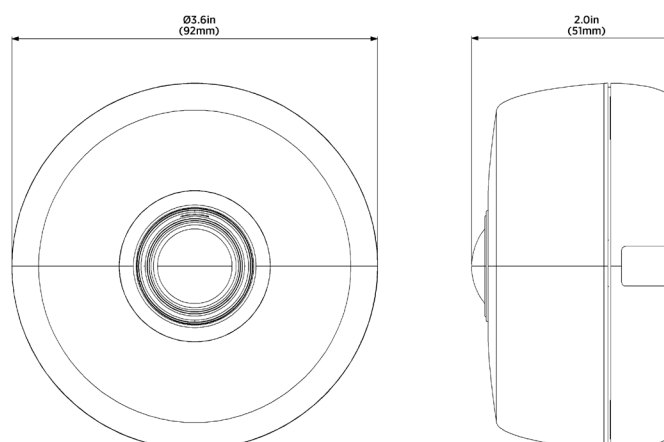

ONCAM

ONCAM C-08 Indoor Technical Specifications

GENERAL		Camera Modes ¹	Fisheye only, Panoramic+ only, Multi-Mode
Field of view	180° Horizontal, 180° Vertical	Multi-stream capacity	4 multiple streams can run concurrently. Primary stream maintains a frame rate of 30 fps ⁴
Image sensor	8MP (approx.) CMOS sensor	Dewarped views ¹	Panoramic+ (180° view): 2160 x 864 to 800 x 320 Corridor+ (ceiling split corridor view): 1728 x 1080 to 640 x 400 T Corridor+ (three-way split corridor view): 2592 x 1080 to 768 x 320 VCam (up to 4): 1280 x 720 to 576 x 432
Lens	180°, 1.6mm, F 2.0, all-glass, fixed focus, fixed Iris, fisheye	Image settings	Brightness, contrast, saturation, sharpness, exposure compensation, exposure priority, imaging preference, text overlay, 180° rotate, multiple color spaces
Day/Night IR cut filter	Automatic, manual	Image enhancement	TrueDetail HDR up to 30 fps TrueDetail HDR maximum dynamic range 120dB
Minimum illumination	Color: 0.1 lux at 50 IRE F/2.0 Mono: 0.1 lux at 50 IRE F/2.0	PTZ functionality	10x zoom with Oncam 3D client-side dewarping software
Video motion detection	16 configurable polygonal regions	VMS/NVR support	ONVIF Profile S, G and T conformant. Contact Oncam for the up-to-date VMS compatibility list
Analytics	Motion Region Detector, Tampering, Loitering Object Detector, Line Crossing,/Counting, Region Object Detector, Object Tracking Only, Region Object Occupancy	Web browser compatibility	Supported minimum browsers versions: Chrome 89, Firefox 87, Edge 90 and Safari 14.0.3
Advanced event management	Configurable Triggers: Motion regions, Network message, Link down Configurable Actions: SMTP (snapshot), Local recording	Unicast	Up to 20 simultaneous users depending on the resolution settings
Networking	IPv4, TCP/IP, UDP, HTTP, DHCP, DNS, NTP, SMTP, RTP, RTSP, RTCP, WEB RTC, HTTPS, WS-Discovery, TLS, ARP and SNMP v2c or V3	Multicast	Supported for all streams (Audio, Video and Metadata ¹)
Privacy	5 configurable privacy regions/masks	Bit rate control	Fixed Quality (Capped Bit rate) or Constant Bit rate
SD card	Built in MicroSD card slot, up to 512GB (FAT32), minimum class 10	ELECTRICAL	
White balance range	Auto White Balance (Range = approx. 2,500 K - 8,000 K)	Ports	RJ45 for 100/1000BASE-Tx
Security	Password protection, WS-Username token; RTSP authentication, HTTP Digest authentication, Authorization levels, Brute force protection, IP address filtering, User access log, Encrypted TLS 1.2, HTTPS encryption, IEEE 802.1x Authentication, EAP-MD5, EAP-TLS, EAP-PEAP	Power input	48 Vdc 0.27 A (PoE 802.3af, Class 0)
VIDEO		Power consumption (maximum)	PoE < 12.95 W
Frame rate	max 60 fps at full resolution ³ or 30 fps with TrueDetail HDR	MECHANICAL	
Video compression	H.264, H.265, MJPEG and VP8 (WEB RTC)	Camera mount	Surface, Pendant , Recessed and Panoramic+ Tilt
Smart compression	StreamLite H.264 and H.265 StreamLite+ H.264 and H.265 (with ColorMap compression ²)	Weight	0.308 kg (0.68 lb)
Fisheye stream 1 (Primary - 360° Fisheye Stream H.264/H.265)	Up to 60 fps ³ : 2160 x 2160 (4.7 MP, max resolution) 30 fps when multi-streaming ⁴ 1920 x 1920 (3.7 MP) 1440 x 1440 (2.1 MP) 992 x 992 (0.98 MP) 512 x 512 (0.26 MP) ⁵	Dimensions (D x W x H)	92 x 92 x 51 mm (3.6 x 3.6 x 2.0 in)
Fisheye stream 2 ⁶ (Secondary - 360° Fisheye Stream H.264/H.265)	Up to 15 fps: 2160 x 2160 (4.7 MP, max resolution) 1920 x 1920 (3.7 MP) 1440 x 1440 (2.1 MP) 992 x 992 (0.98 MP) 512 x 512 (0.26 MP) ⁵	ENVIRONMENTAL	
Fisheye stream 3 (Tertiary - 360° Fisheye Stream H.264/H.265)	Up to 30 fps: 1440 x 1440 (2.1 MP, max resolution) 992 x 992 (0.98 MP) 512 x 512 (0.26 MP) ⁵	Operating temperature range	0 °C to +50 °C (+32 °F to +122 °F)
Fisheye stream 4 (Low resolution - 360° Fisheye Stream H.264/H.265/MJPEG)	Up to 10 fps: 512 x 512 (0.26 MP max resolution) ⁵	Ingress protection	IP40
		CERTIFICATIONS	
		Regulatory Model	C08-IEC1-O
		Approvals	IEEE802.3af CE AS/NZS CISPR 32: 2015 AMD 1: 2020, Class B EN 55032:2015/A11:2020, Class B EN 55035: 2017/A11: 2020 FCC ICES-003 Issue 7:2020, Class B UL/cUL 62368-1 RoHS REACH IP40 BIS ISI3252(Part1), IEC 60950-1 NOM

ONCAM C-08 Indoor Optional Accessories

ACCESSORIES

Indoor Recessed Mount



Part Number	38502
Cut out	100 mm (4 in)
Cable entry	Rear
Retention	Spring clips
Construction	Rear: ADC12 Aluminum Front: Polymer
Plenum rated	UL2043
Form factor	Low profile
Installation	Ceiling
Weight	0.186 kg (0.41 lb)
Depth	65 mm (2.55 in)
Dimensions	Ø121 mm (Ø4.76 in)

ACCESSORIES

Indoor Pendant Mount



Part Number	38503
Thread	M20 & 3/4" NPT, Female
Construction	ADC12 Aluminum
Form factor	Low profile
Weight	0.080 kg (0.18 lb)
Height	90 mm (3.54 in)
Dimensions	Ø84 mm (Ø3.31 in)

Panoramic+ Tilt Mount¹



Part Number	40032
Angle	20° to 45°
Cable entry	Rear
Construction	Polymer
Installation	Wall
Weight	0.03 kg (0.07 lb)
Depth	44 mm (1.7 in)
Dimensions	Ø87 mm (Ø3.25 in)

¹ Firmware version 2.0.x and above required

² Dependent on VMS support

³ High Speed Mode¹, single stream only, set to 60 fps, exposure priority set to frame rate, 60Hz

Max achievable fps is dependant on VMS support

⁴ Maintain 30 fps ±5%. 25 fps in TrueDetail HDR Mode, 60Hz

⁵ MJPEG at 10 fps, <5,000 kbps supported

⁶ Resolution and video source view shared with Primary Stream in TrueDetail HDR Mode

© Copyright 2022 ONVU Technologies AG. All rights reserved. Oncam is a trading name of ONVU Technologies AG. Specifications and configurations subject to change without notice. "ONCAM" and the "ONCAM logo" are trademarks, and in some cases registered or protected trademarks, of Oncam Global Limited and/or Oncam Global, Inc., including under registration in the UK, India and in the U.S. Patent and Trademark Office. All other trademarks are the property of their respective owners.