
SGA-AIR-2000K
SURVEILLANCE POWER ENCLOSURE



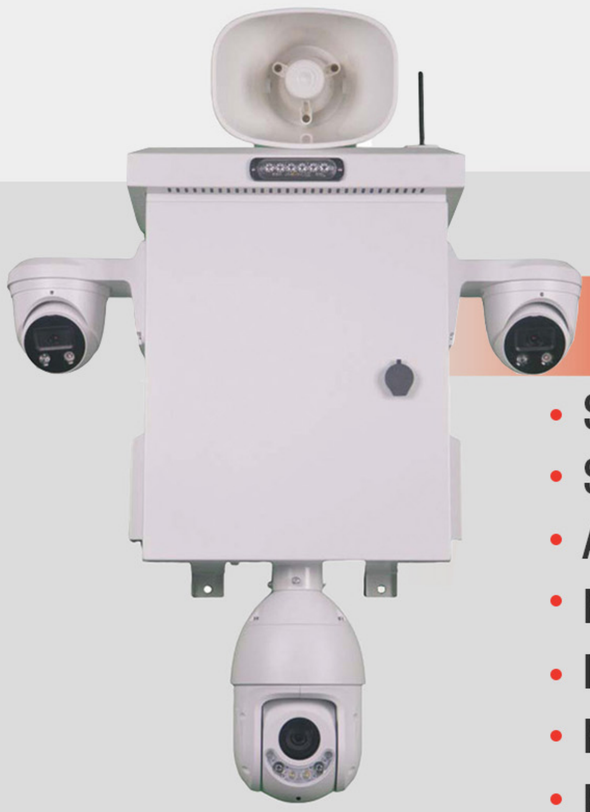

FEATURES

- Suitable for indoor and outdoor use.
- Supports the external installation of PTZ IPC, Dome IPC, Bullet IPC, and IP Speaker.
- Accommodates interior devices such as NVR, 4G Router, and POE Switch.
- Equipped with an AC input line supporting up to 110V and 1.5KW.
- Includes two built-in power output sockets, each with a maximum load of 110V/550W.
- Features five DC power output ports with a total output power of 255W.
- Built-in AC input switch for power control.
- Includes an open-door alarm switch that outputs a normally closed alarm signal.
- Integrated temperature-controlled cooling fan activates at 45°C.
- Can be mounted on walls or poles.
- Features a red and blue flashing warning light with three operational modes: normally open, normally closed, and alarm input activated.

SPECIFICATIONS

DC OUTPUT PORT(MAX 255W)		
DC 52V max 2.5A (for POE switch POE NVR.....)	1 port	All ports can be extended with one to two or one to four DC lines.
DC 36V max 2A (for thermal imaging camera)	1 port	
DC 24V max 1A (for wireless bridge...)	1 port	
DC 12V max 2A (for 4G rout photoelectric transducer...)	1 port	
DC 5V max 2A (for 5V power supply equipment)	1 port	

OTHER SPECIFICATIONS	
Material quality:	Aluminum
Waterproof:	IP65
Surface preparation:	Power spraying
Weight:	9KG
Size:	H=19.6 L=14 W= 9 (Inch)

SGA-AIR-2000K
SURVEILLANCE POWER ENCLOSURE



ACCESSORIES

1: 3/4 INCH junction box adapter	4 PCs	(For installation bullet camera)
2: PM 4*10 screw	3 PCs	(For installation speaker)
3: PM 6*12 screw	3 PCs	(For installation PTZ)
4: Rubber stopper	4 PCs	
5：PM 4*16 screw	8 PCs	(Installation UWB129 for junction box and dome camera)
6: 6*60 Screw (rubber plug)	4 Set	(For the installation, install the box on the wall)
7: 12 * 700mm*1mm stainless steel holding hoop	3 PCs	(For mounting the box to the pole)
8：Auxiliary installation hook	1 PCs	
9：CAT 6 network cable L=1.6 ft	4 PCs	
10: AC power cable L=6 ft	1 PCs	
11:DC cable (22 AWG) L= 1 ft	2 PCs	
12：DVR motherboard installation copper pillar	8 PCs of screws	
13: DVR hard drive installation screw	4 PCs	
14：Antenna is fixed with EVA:	2 PCs	