


PART NUMBER 659116DB

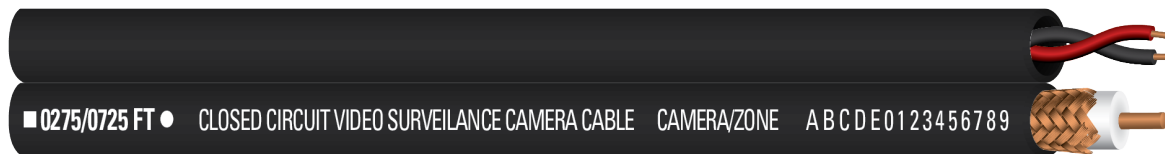

■ 0275/0725 FT ● CLOSED CIRCUIT VIDEO SURVEILLANCE CAMERA CABLE CAMERA/ZONE A B C D E 0 1 2 3 4 5 6 7 8 9

CABLE SPECIFICATIONS

DESCRIPTION	Siamese Type RG 59/U Non-Plenum, 20 AWG Bare Copper Center Conductor with a 95% Bare Copper Braid + 18/2 Non-Shielded Non-Plenum, Direct Burial
CONDUCTOR	Coax: 20 AWG Solid Bare Copper; Twisted Pair: 18 AWG Stranded (7x26)
COLOR CODE	Coax: N/A; Twisted Pair: Black/Red
SHIELD	Coax: 95% Bare Copper Braid; Twisted Pair: N/A
DRAIN WIRE	N/A
JACKET	PE with Floodant
JACKET COLOR	Black Jacket
MARKING	CLOSED CIRCUIT VIDEO SURVEILLANCE CAMERA CABLE CAMERA / ZONE A B C D E 0 1 2 3 4 5 6 7 8 9 RG59/U 1C20 SHIELDED 2C18 DIRECT BURIAL
OVERALL DIAMETER	.242" x .460" Nom.
CABLE WEIGHT	50 Lbs/Mft.
CAPACITANCE	Coax: 16.7 pF/ft. Nom.
IMPEDANCE	Coax: 75 Ohms
TEMPERATURE RATING	-40C to 75C

INDUSTRY STANDARDS



All specifications referenced are nominal measurements unless otherwise noted.