
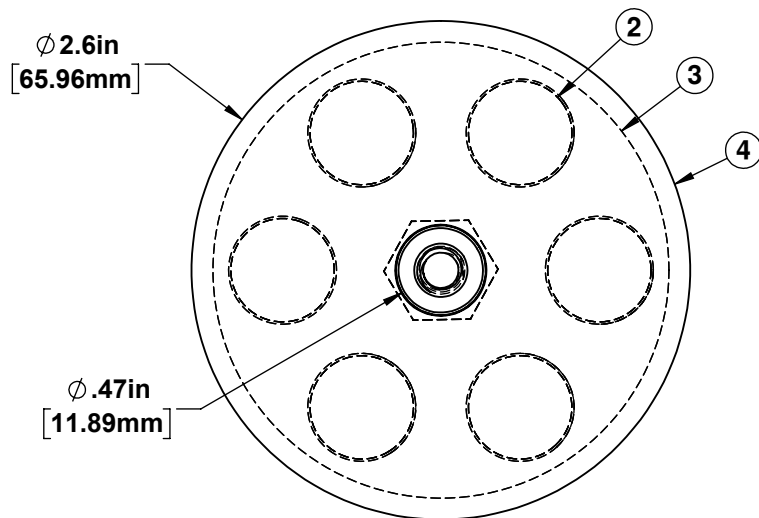
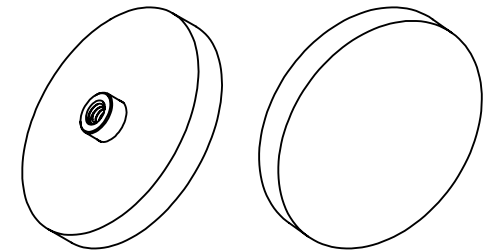


75003

ITEM NO.	PART NUMBER	DESCRIPTION	Material	Finish	QTY.
1	SO 4-20 X .5	1/4-20 Female Threaded Standoff, .5" Long	Steel	Zinc	1
2	75003 Magnet	Ø.56" X .19" Neodymium Magnet	NdFeB	Zinc	6
3	75003 Plate	Assembly Retainer Plate	Steel	Zinc	1
4	75003 Rubber	Thermoplastic Rubber Coating	TPR	Black	1

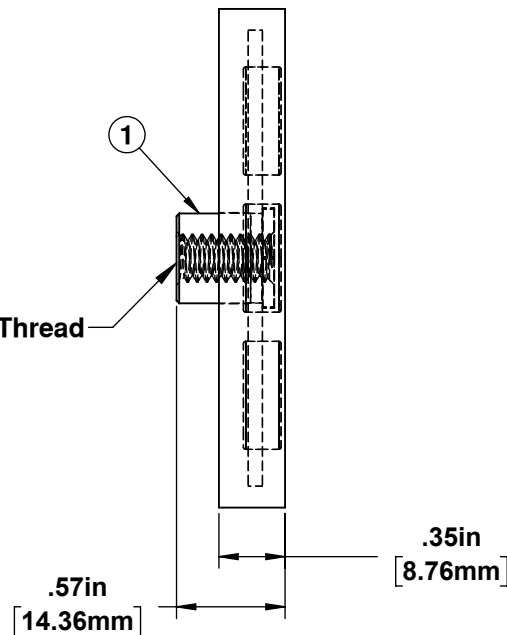


1/4-20 Female Thread

**Mechanical Tensile Strength:**

Vertical Pull 40 LBS. (178N)

Side Pull 10 LBS. (45N)

ALL TESTING PERFORMED USING
3mm MIN. THICK 1008-1010 STEEL PLATE

Please read before use! Disclaimer: Mag Daddy neither assumes nor accepts any liability for damages resulting from the handling or use of magnets. With your purchase, the buyer confirms that you have read and understand the following warnings: the buyer agrees that he/she is responsible for all damages/injuries caused by the magnets, which includes personal injuries, property damages or magnet damages. The buyer must agree with the terms before purchase. Pull forces we have provided are estimates only, we are not responsible for any inaccuracy of the magnet pull force. *Please test the pull force before any usage.* Magnets are very strong. Handling them with care is necessary to prevent personal injuries, property damages and magnet damages. CAN BE HARMFUL TO PACEMAKER WEARERS and others with MEDICAL IMPLANTS.

INDOOR USE RECOMMENDED

OPERATING TEMPERATURE - -40° - 176° F (-40°- 80°C)

CONFIDENTIAL: USE OF THIS DRAWING WITHOUT WRITTEN AUTHORIZATION BY MAG-DADDY, LLC IS PROHIBITED		INCH ☒ MM ☐	SCALE: 3:4	Sheet Size: A
GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm .015$ (.38mm)		THIRD ANGLE PROJECTION APV. ☐ Rev. 0 DWN. SS DATE: 10/14/24		
ANGLES: $\pm 1^\circ$		MAG DADDY MAGNETIC FASTENERS 295 Jamie Ln. Wauconda, IL 60084 www.magdaddyusa.com PH:(847) 719-5600		
PART DESCRIPTION: 40lb.(178N), 1/4-20 Female Thread, Ø2.6" X .35" Thick Rubber Coated Magnet Assembly				PART NO. 75003

LAST PRINT DATE: 10/13/2024