

A2E4

2 door controller - expandable up to 4 doors, basic power

Features

- Embedded Linux operating system
- Expandable up to 4 doors (when used with A2M board)
- 2 Readers (In/Out)
- 2 Relays (Lock/Aux)
- 3 Inputs (REX, DPS, Aux) Global
- UL listed - 294 Series 7
- 5 year warranty
- NDAA Compliant*

Technical Specification

Processor	Quad Core Cortex, 1.5 GHz
Memory	1GB DDR3 & 8GB eMMC
Operating System	Embedded Linux
Transactions	> 45 per second
System Power Requirements	115VAC @ 1.5A
Operating Temperature	50°F to 95°F (10°C to 35°C)
Enclosure Size (W x H x D)	14.25 x 14.25 x 3.75in (362 x 362 x 95mm)
Internal Power Supply	Controller & Readers Only
Lock Power Output	NA
Battery Backup	Controllers & Readers Only
Recommended Battery Type (battery is not included)	Powersonic PS-1270-FI or Similar 12V, 7AH, Sealed Lead Acid with 0.187 inch terminals
Standby Power Requirement	400mA @ 12V
Readers (Wiegand)	4 Total, One In & One Out Reader for Each Door
Reader Power	300mA @ 12V Max per Reader 1000mA @ 12V Max per System
Request to Exit (REX) Inputs	2 Total, One for Each Door
Door Position (status) Inputs	2 Total, One for Each Door
Auxiliary Input	2 Total, General Purpose
Tamper Digital Input	Yes, Prewired on Units with Integrated Power
Power Fault Digital Input	Yes, Prewired on Units with Integrated Power
Door Lock Outputs	2 Form C Relay, 24V @ 2.0A
Auxiliary Outputs	2 Form C Relay, 24V @ 2.0A


NDAA
COMPLIANT

*Products are in compliance with NDAA Section 889 Part B Guidelines

Optional Accessory



A2M
Expansion Board

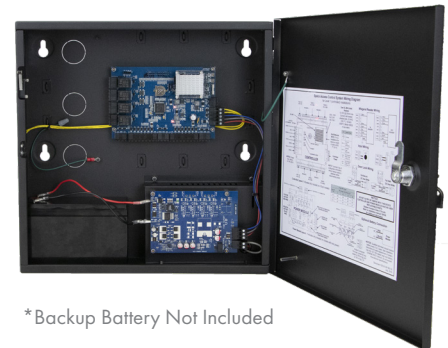

* Backup Battery Not Included

