



# **ALTV2416300ULM, ALTV2416300ULCBM** **UL Listed AC CCTV Power Supply**

Rev. DSALTV2416300ULM - K20H

## **Overview**

These Altronix AC Wall Mount CCTV Power Supplies provide 24VAC or 28VAC distributed via sixteen (16) fuse or PTC protected power limited outputs for powering CCTV Cameras, heaters and other video accessories.



## **Specifications**

- Input 115VAC, 50/60Hz, 2.7 amp.
- 24VAC @ 12.5 amp (300VA) or 28VAC @ 10 amp (280VA) supply current.
- Illuminated power disconnect circuit breaker with manual reset.
- Surge suppression.
- AC power LED.
- Spare fuse(s) provided (all models w/primary and/or secondary fuses).
- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.

## **Models**

### **ALTV2416300ULM**

- Sixteen (16) fuse protected outputs.
- Outputs are rated @ 3.5 amp.

### **ALTV2416300ULM3**

ALTV2416300ULM w/3-wire Line Cord.

### **ALTV2416300ULCBM**

- Sixteen (16) Class 2 Rated PTC protected power limited outputs.
- Outputs are rated @ 2.5 amp.

### **ALTV2416300ULCBM3**

ALTV2416300ULCBM w/3-wire Line Cord.

## **Agency Approvals**



UL Listed for Commercial CCTV Equipment (UL 2044).




CUL Listed - CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment.



European Conformity

## **Enclosure Dimensions**

8.5"H x 7.5"W x 3.75"D

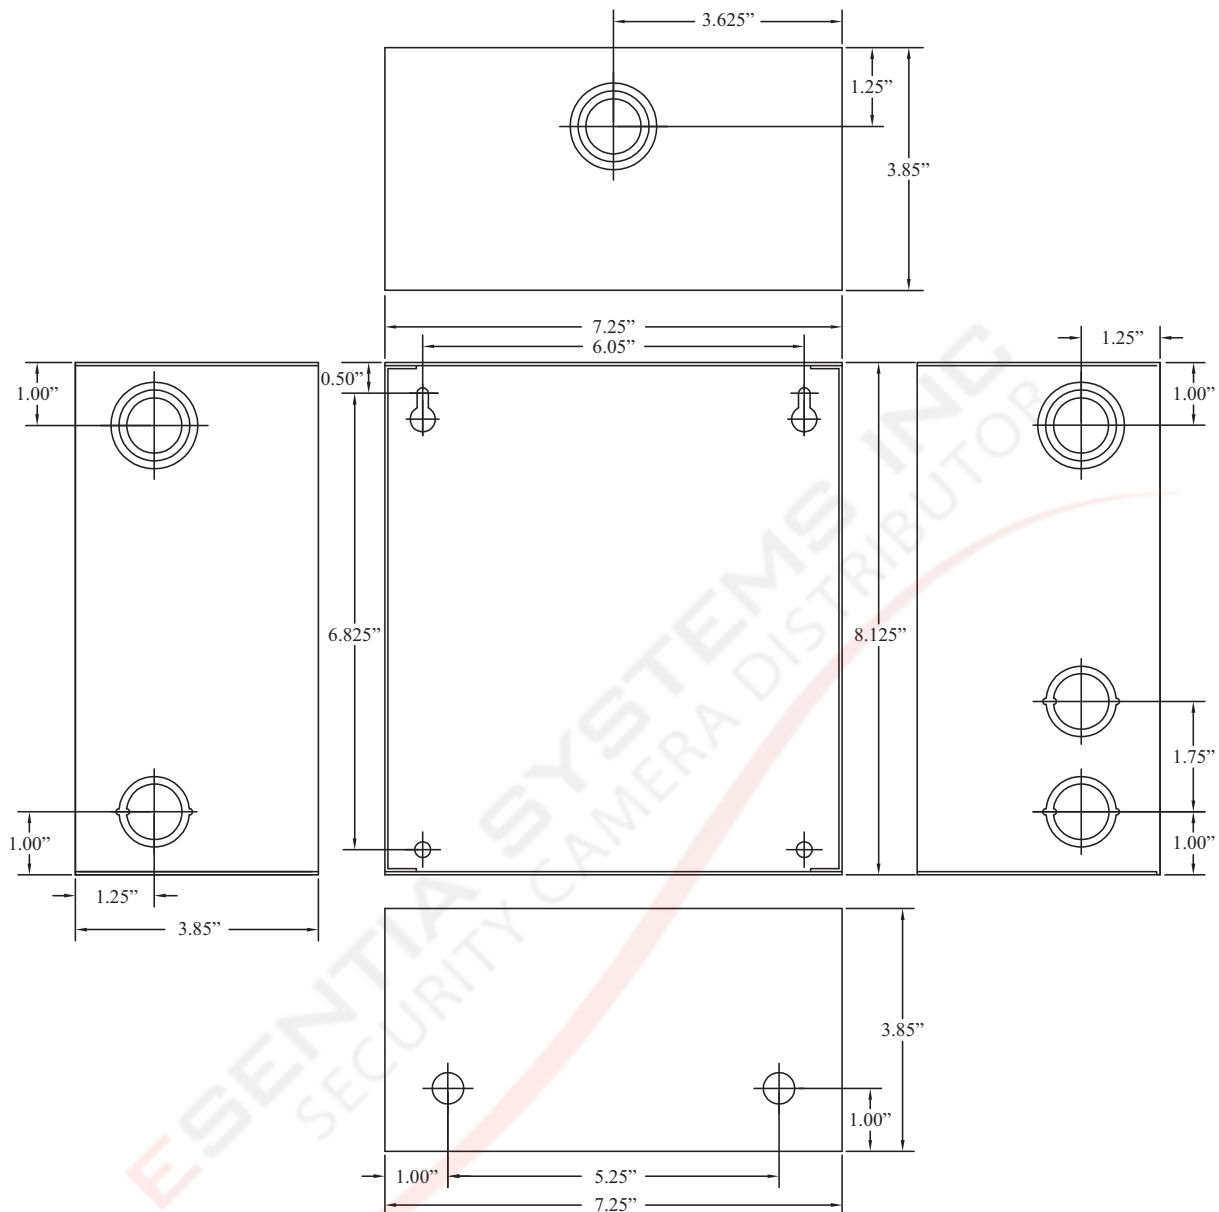

### **Shipping Weights (approximate):**

- ALTV2416300ULM: 14.2 lbs.
- ALTV2416300ULCBM: 14.2 lbs.

- ALTV2416300ULM3: 14.5 lbs.
- ALTV2416300ULCBM3: 14.5 lbs.