BK-929

8K Audio Extractor with ARC/eARC output for Dolby Atmos and DTS: X



DIMENSIONS & WEIGHT:
Length: 95mm / 3.74in **Width:** 68mm / 2.68in
Height: 18mm / 0.71in **Weight:** 178g / 6.28oz

The **BK-929** is an HDMI audio extractor that extracts audio from HDMI sources like DVD players and TV sticks, outputting to ARC/eARC soundbars with formats up to Dolby Atmos and DTS:X. Compliant with HDMI 2.1 and HDCP 2.3, it has a video bandwidth of up to 48Gbps FRL and 18Gbps TMDS, supporting resolutions up to 4K@120Hz 4:4:4 or 8K@60Hz 4:2:0. Features VRR, ALLM, QMS, QFT, SBTM support, and HDR10+, Dolby Vision, and HLG pass-through. Note: It does not extract audio from TV's internal apps. Compact design, perfect for commercial and personal setups.

PACKAGE CONTENTS: 1x BK-929,1x Power Adapter, User Manual

KEY FEATURES:

- HDMI 2.1 & HDCP 2.3 compliant
- 48Gbps FRL & 18Gbps TMDS Video Bandwidth
- Video resolutions up to 8K@60Hz 4:2:0 12bit and 4K@120Hz 4:4:4 12bit
- VRR, ALLM, QMS, QFT, SBTM support
- HDR/10/10+, Dolby Vision and HLG pass through
- LPCM 7.1CH, Dolby TrueHD, Atmos, and DTS-HD Master, DTS:X Audio pass-through
- Extract audio directly from any input media device
- Compact design, plug and play setup

SPECIFICATIONS

CONNECTIVITY:

INPUT:	1 × HDMI [Type A, 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female] For TV
	1 × HDMI [Type A, 19-pin female] For eARC Soundbar
CONTROL:	1× SERVICE [USB-C, Update port]

COMPLIANCES:

HDMI Compliance	: HDMI 2.1
HDCP Compliance	: HDCP 2.3

SUPPORTED HDMI CABLES:

HDMI 2.1	: We recommend using high quality HDMI 2.1 cables under 30 feet for optimum performance

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

AUDIO SUPPORT:

HDMI Audio Formats	: LPCM, Dolby Digital/Plus/EX, Dolby True HD, Dolby Atmos, DTS, DSD, DTS-EX, DTS-96/24, DTS High Res, DTS-HD Master Audio, DTS:X

POWER:

Power Consumption		: 3.92W (Max)
Power Supply:	Input	: AC 100-240V 50/60Hz
	Output	: DC 5V/1A


Tx Rx


OVER 10 YEARS EXPERIENCE

BASED IN THE U.S.A

FULL 1 YEAR LIMITED WARRANTY

CONNECTION DIAGRAM

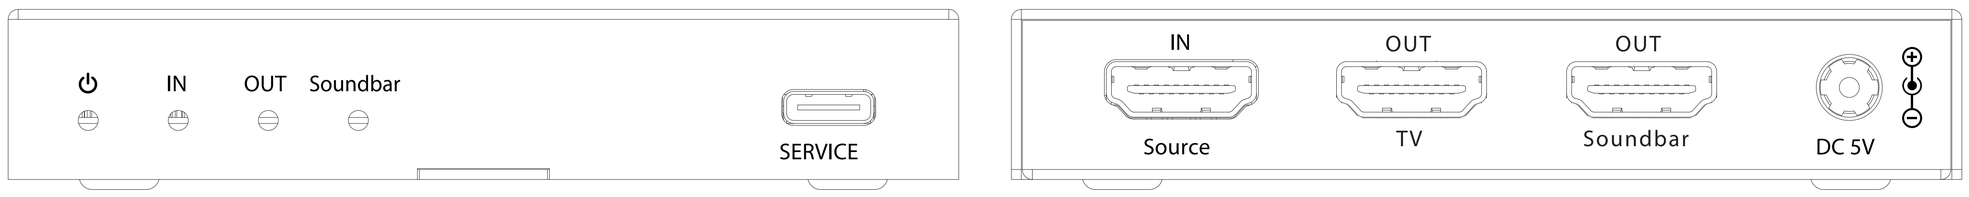

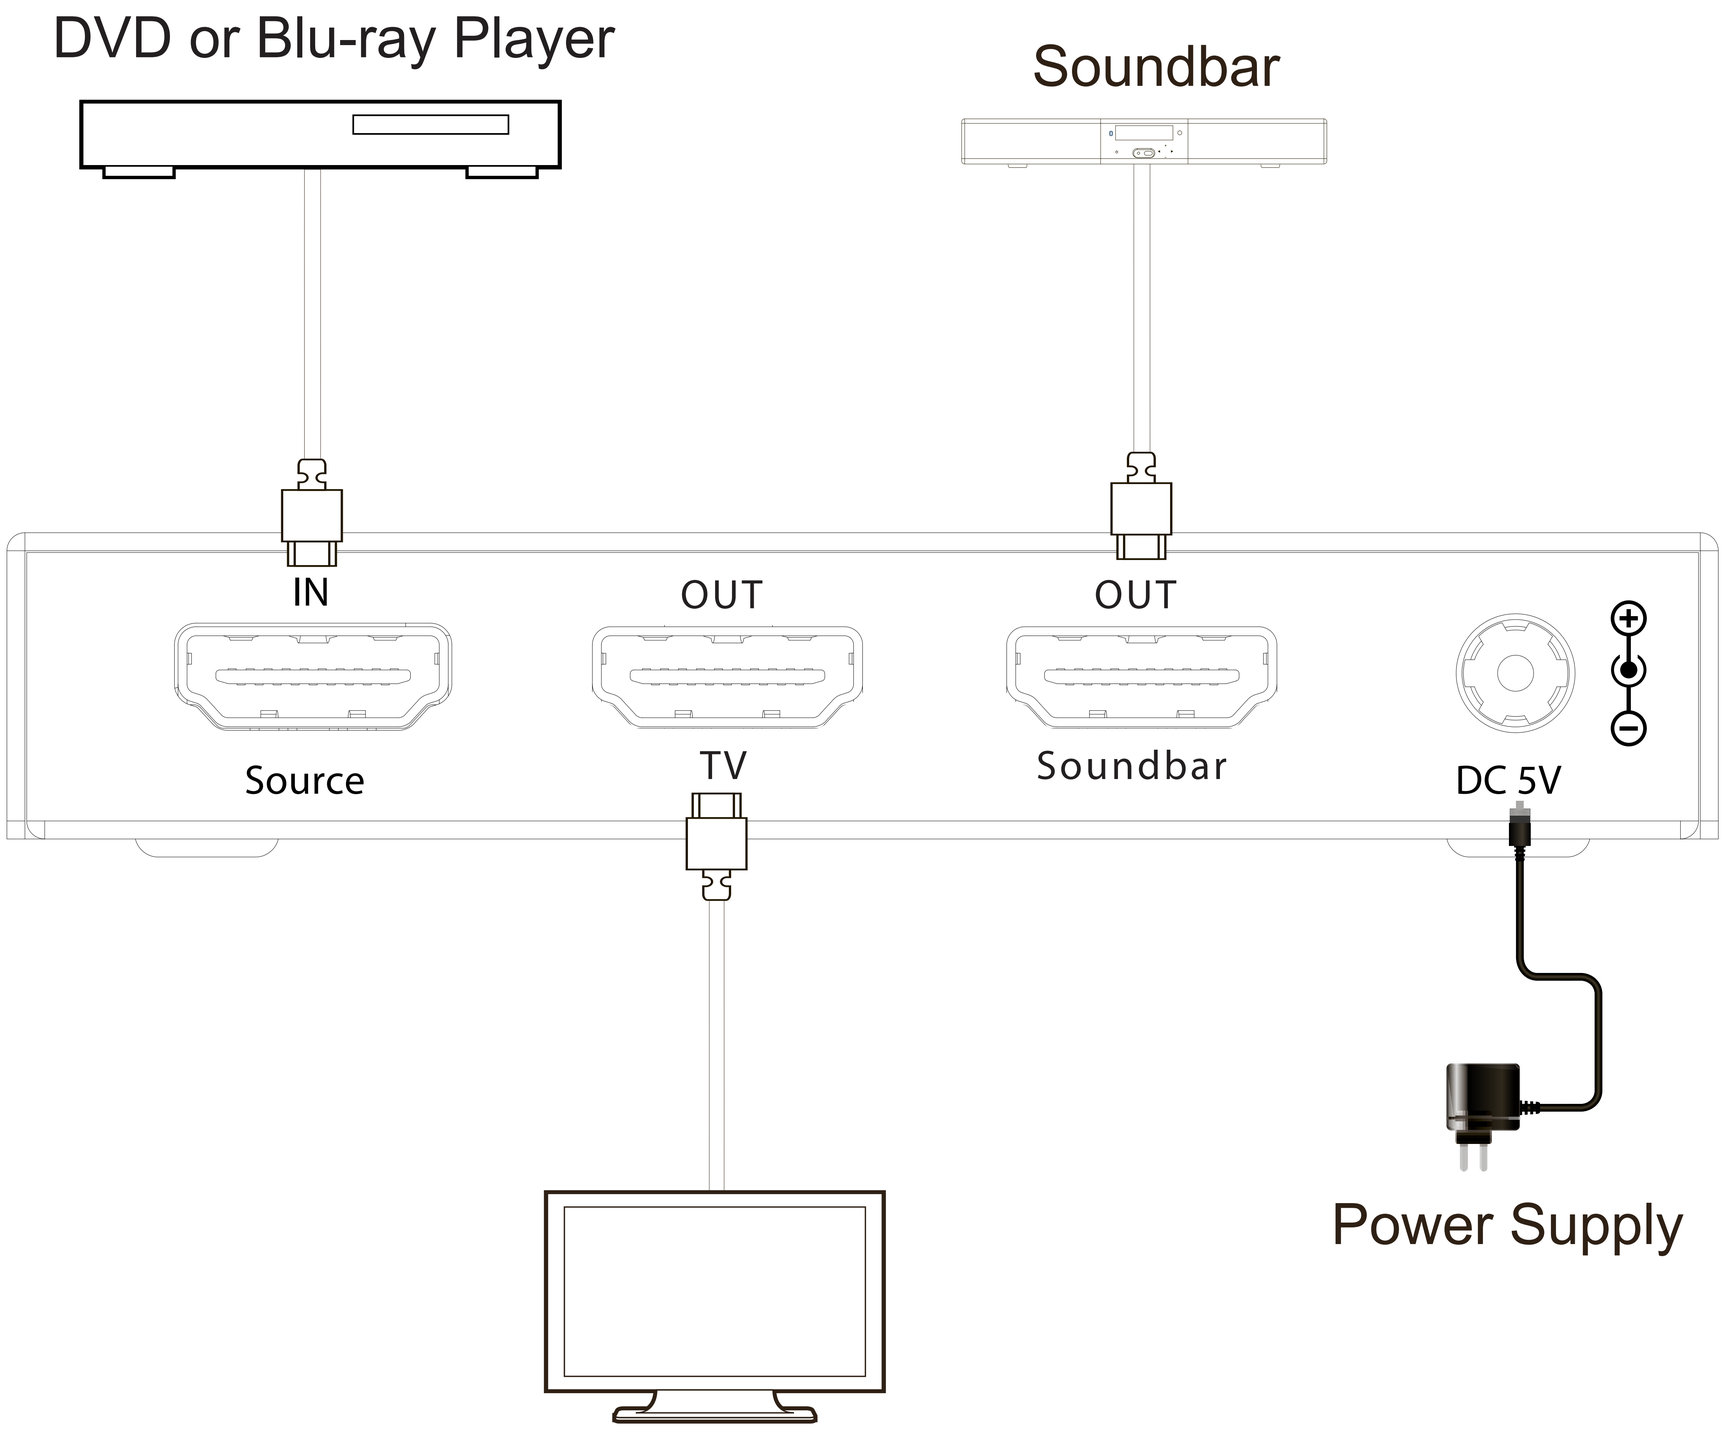

OVER 10 YEARS EXPERIENCE

BASED IN THE U.S.A

FULL 1 YEAR LIMITED WARRANTY