

Datasheet

CA-A360-USB-CAB - CENTAUR USB/RS-485 Converter

Product Description

The USB / RS-485 converter (CA-A360-USB) is a local interface between the Access Control system and the Centaur Software.

The CA-A360-USB CAB is installed between the CENTAUR Server and the CT-V900-A controller, permitting a "daisy-chain" configuration which extends the maximum distance to 1220m (4000ft).

The Converter is required when the distance between the CENTAUR Server and the nearest CT-V900-A controller is more than 25 ft (8.5 m).



Key Features

- Communicate with a CT-V900-A controller up to 4000 ft (1220 m)
- Connected directly between a computer and the CT-V900-A
- Converts RS-485 protocol to USB or RS-232 protocol
- LED status indicators for power, network and port activity

 Certification


 DEEE

RoHS Certification

 32°F to 120°F
0°C to 49°C

Product Specifications

- Communication:** E-Bus (RS-485) to the CT-V900-A & USB to the computer
- On-Board:** On-board End-Of-Line (EOL) and BIAS jumpers
- Extra Connector:** 2m (6ft) 9-Pin D-Sub RS-232 connector included
- Required Cable:** 2 twisted pair UTP cable (Cat 5)
- Weight:** 3.8 oz, 108 g

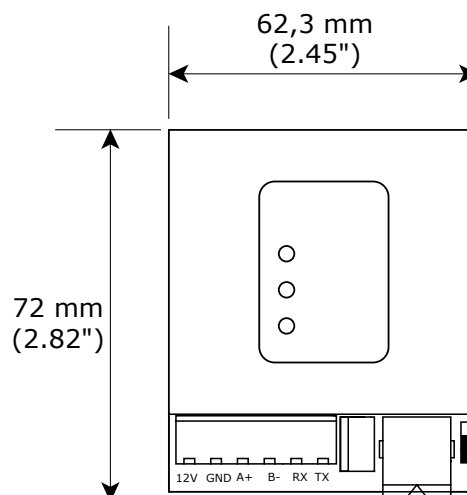

Electrical Specifications

- Power input:** 12 VDC
- Consumption:** 100 mA max

