




## Dimensions

Unit: Inch (mm)

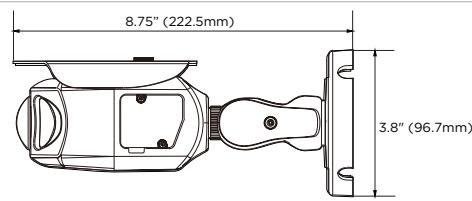

## Specifications

IMAGE	
Image sensor	8.48MP 1/1.8" Star-Light Plus sensor
Total pixels	3856(H) X 2200(V)
Active pixels	3840 (H) X 2160 (V)
Minimum scene illumination	0.15 lux (color), 0 lux (B/W)
LENS	
Focal length	2.3mm, F2.8
Lens type	Ultra-wide angle lens
Field of View	HVoF: 175° / VFoV: 80°
IR distance	100ft range
I/O	
Audio in/out, compression	1 Line (1.0Vrms, 3K ohm) input/1 Line output, G.711 ulaw
Alarm input/output	1 input/1 output
INTELLIGENT VIDEO ANALYTICS	
Deep learning analytics	Deep Learning object tracking
Analytics filters	Zones and lines, tamper, metadata, intrusion, line crossing, counting, counting lines, appear, disappear, stopped, enter, exit, direction, tailgating, dwell, logical rules
OPERATIONAL	
Shutter mode	Auto, manual, anti-flicker, slow shutter
Shutter speed	1/15 - 1/32000
Slow shutter	1/2,1/3,1/5,1/6,1/7.5,1/10
Auto gain control	Auto
Day and night	Auto, day (color), night (B/W)
3D Digital Noise Reduction	Smart DNR 3D-DNR
Wide Dynamic Range	True WDR, 120dB
White balance	Yes
Mirror and flip	Yes
Alarm notifications	Notifications via email, FTP, alarm output and SD card recording
Memory slot	Micro SD/SDHC/SDXC class 10 card (not included)
NETWORK	
LAN	1000Base-T (1Gbps)
Video compression type	H.265, H.264, MJPEG
Resolution	H.265, H.264: 3840x2160, 2592x1944, 2560x1440, 1920x1080, 1280x720, 640x480, 640x360, 352x288, 352x240 MJPEG: 1920x1080, 1280x720, 800x600, 768x432, 704x576, 704x480, 640x480, 640x360, 352x288, 352x240
Frame rate	Up to 30fps at all resolutions
Video bitrate	100Kbps - 25Mbps, multi-rate for preview and recording
Bitrate control	Multi-streaming CBR/VBR at H.265 (controllable frame rate and bandwidth)
Streaming capability	Triple Streaming (3rd stream supports MJPEG only)
IP	IPv4
Protocol	TCP/IP, UDP, AutoIP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3(MIB-2), ONVIF
Security	HTTPS (TLS), IP filtering, 802.1x, digest authentication
ONVIF conformance	Yes
Web viewer	OS: Windows7, Windows8, Windows10 Browser: Microsoft Edge, Google Chrome, Mozilla Firefox, Safari
Video management software	DW Spectrum
DW Spectrum edge license	1DW Spectrum edge license included
Local server recording	1TB local memory for recording
Max. number of CloudCam cameras in a network/system	Up to 10 MEGApix Ai CloudCam cameras in a network/system
ENVIRONMENTAL	
Operating temperature	-40°F - 122°F (-40°C - 50°C) (on DC only)
Operating humidity	10-90% RH, (non-condensing)
IK rating, IP rating	IK09 impact-resistant, IP67-rated
Other certifications	CE, FCC, RoHS, UL, NDAA, TAA
ELECTRICAL	
Power requirement	DC12V, PoE IEEE 802.3af Class 3 (Adapter not included)
Power consumption	DC12V: max 21.9W, 1.83A, PoE: max 9.2W, 191.6mA
MECHANICAL	
Material	Aluminum die-casting bullet housing
Dimensions	5.03" x 8.75" x 3.8" (127.9 x 222.5 x 96.7mm)
Weight	2.13 lbs (0.97 kg)
Warranty	5 year warranty

## Summary

The NDAA/TAA-compliant 4K MEGApix Ai CloudCam delivers serverless cloud recording with 1TB onboard storage and an edge AI engine. Preloaded with DW Spectrum server and license, it eliminates extra hardware needs. Its ultra-wide lens ensures comprehensive situational awareness, making it an all-in-one surveillance solution.

## Features & Benefits

- 4K sensor at real-time 30fps
- Star-Light Plus color in near-total darkness technology
- Seamless integration and control with DW Spectrum
- Built-in 1TB storage options for up to 90 days of retained video
- Easily to deploy with pre-loaded DW Spectrum for out-of-the-box operation.
- 24/7 access to live and recorded video feed
- Automatic installation and licensing with first power on
- 2.3mm ultra-wide view lens for edge-to-edge image clarity without pixel loss
- True Wide Dynamic Range (WDR) for clear images in challenging light
- Simultaneous streaming and multiple codec options for smart bandwidth management
- Cold Start -40°F (-40°C) (DC power), allowing the camera to power up in extremely cold environments
- 100' Smart IR™ with intelligent camera sync for clear B/W images with no need for external light
- Smart DNR 3D digital noise reduction minimizes noise and ghosting in motion, particularly in low-light environments.
- Two-way audio for direct communication between the monitoring station and the camera's location
- Alarm sensor input and relay output for access control integration
- Web server built-in for easy camera management from any browser
- PoE and DC12V for single cable simplified installation
- NDAA/TAA compliant for federal and government projects
- IP67- and IK9-rated camera housing built to last
- 5 year warranty

## Accessories (optional)

 DWC-BLJUNC-W  
Junction box

 DWC-PMB-WLW  
Pole mount bracket

 DWC-V1CNMW  
Pole mount bracket



866.446.3595

Built for Users.™

 sales@digital-watchdog.com

 www.digital-watchdog.com

