



Summary

This NDAA/TAA-compliant MEGAPIX.Ai™ wall-mounted IP camera delivers 4K resolution at real-time 30fps with an edge AI engine, bringing deep learning capabilities to your fingertips. The 2.3mm ultra-wide lens provides edge-to-edge clarity without pixel loss, and a 45° angle mount makes the camera suitable for long and narrow installations.

Features

- 4K sensor at real-time 30fps
- Star-Light Plus™ color in near-total darkness technology.
- AI Deep Learning object detection.
- Create up to 40 separate detection zones.
- Easy setup with no manual analytics calibration.
- Seamless integration and control with DW Spectrum®.
- Reduce false alarms with multiple detection zones and logical rules.
- Increase your recording storage with smart recording and no false alarms.
- Angle bracket included for a 45° installation that covers even areas near the camera.
- 2.3mm ultra-wide view lens for edge-to-edge image clarity without pixel loss
- True Wide Dynamic Range (WDR) for clear images in challenging light
- Simultaneous streaming and multiple codec options for smart bandwidth management
- 100' Smart IR™ with intelligent camera sync for clear B/W images with no need for external light
- Smart DNR™ 3D digital noise reduction reduces noise and ghosting for motion in low-light environments.
- Two-way audio with a built-in microphone for direct communication between the monitoring station and the camera's location.
- Local SD card slot for local recording in case of network loss.
- Alarm sensor input and relay output for access control integration
- Web server built-in for easy camera management from any browser
- PoE and DC12V for single cable simplified installation
- NDAA/TAA compliant for federal and government projects
- IP67- and IK10-rated camera housing built to last
- 5 year warranty

Accessories (optional)



DWC-PMB-WLW
Pole mount bracket




DWC-V1CNMW
Corner mount

4K wide-angle wall-mounted IP camera with
AI and color in near-total darkness
DWC-XSWA08Bi

Dimensions

Unit: Inch (mm)

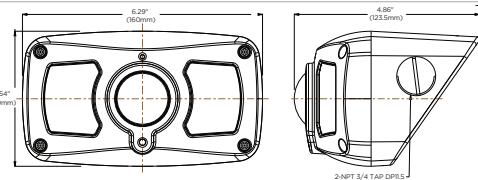

Specifications

| IMAGE | |
|-----------------------------|---|
| Image sensor | 8.48MP 1/1.8" Star-Light Plus™ sensor |
| Total pixels | 3856(H) X 2200(V) |
| Active pixels | 3840(H) X 2160(V) |
| Minimum scene illumination | 0.15 lux (color) 0 lux (B/W) |
| S/N ratio | 50d |
| Test monitor video output | Local video output CVBS 1.0V p-p (75Ω), 16:9 aspect ratio |
| LENS | |
| Focal length | 2.3mm, F2.8 |
| Lens type | Fixed lens |
| Field of view | Horizontal: 175° / Vertical: 80° |
| IR distance | 100ft range |
| I/O | |
| Audio input/output | 1 line input (1.0Vms, 3K ohm), 1 microphone built-in (1 selectable at a time)/1 output |
| Audio compression | G.711 ulaw |
| Alarm input/output | 1 input/1 output |
| Event trigger | Motion alarm, network loss, temperature anomaly, illegal login, schedule, sensor detection |
| INTELLIGENT VIDEO ANALYTICS | |
| Deep learning analytics | Deep Learning object tracking |
| Analytics filters | Zones and lines, tamper, metadata, intrusion, line crossing, counting, counting lines, appear, disappear, stopped, enter, exit, direction, tailgating, dwell, logical rules |
| OPERATIONAL | |
| Shutter mode | Auto, manual, anti-flicker, slow shutter |
| Shutter speed | 1/15 - 1/32000 |
| Slow shutter | 1/21/31/51/61/7.5, 1/10 |
| Auto gain control | Auto |
| Day and night | Auto, day (color), night (B/W) |
| 3D Digital Noise Reduction | Smart DNR™ 3D-DNR |
| Wide Dynamic Range (WDR) | True WDR, 120dB |
| White balance | Yes |
| Mirror and flip | Yes |
| Alarm notifications | Notifications via email, FTP, alarm output, SD card recording |
| Memory slot | Micro SD/SDHC/SDXC class 10 card (not included) |
| NETWORK | |
| LAN | 1000Base-T (1Gbps) |
| Video compression type | H.265, H.264, MJPEG |
| H.265, H.264: | 3840x2160, 2560x1440, 1920x1080, 1280x720, 704x576, 704x480, 640x360, 352x288, 352x240 |
| Resolution | MJPEG: 1920x1080, 1280x720, 768x432, 704x576, 704x480, 640x360, 352x288, 352x240 |
| Frame rate | Up to 30fps at all resolutions |
| Video bitrate | 100Kbps - 25Mbps, multi-rate for preview and recording |
| Bitrate control | Multi-streaming CBR/VBR at H.264, H.265 (controllable frame rate and bandwidth) |
| Streaming capability | Triple Streaming (3rd stream MJPEG only) |
| IP | IPv4 |
| Protocol | TCP/IP, UDP, AutoIP, RTP(UDP/TCP), RTSP, NTP, HTTP, HTTPS, SSL, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMPv1/v2/v3(MIB-2), ONVIF |
| Security | HTTPS (TLS), IP filtering, 802.1x, digest authentication |
| ONVIF conformance | Yes |
| Web viewer | OS: Windows® 7, Windows® 8, Windows® 10 Browser: Microsoft Edge®, Google Chrome®, Mozilla Firefox®, Safari® |
| VMS | DW Spectrum® |
| ENVIRONMENTAL | |
| Operating temperature | -4°F - 122°F (-20°C - 50°C) |
| Operating humidity | 10-90% RH, (non-condensing) |
| IK rating | IK10 impact-resistant |
| IP rating | IP67-rated |
| Other certifications | CE, FCC, RoHS, UL, NDAA, TAA |
| ELECTRICAL | |
| Power requirement | DC12V, PoE, adapter not included |
| Power consumption | DC12V: max 9.6W, 800mA, PoE: max 11.6W, 42mA |
| MECHANICAL | |
| Material | Aluminum die-casting bullet housing |
| Dimensions | 6.29" x 4.86" x 3.54" (160 x 123.5 x 90mm) |
| Weight | 2.2 lbs (1 kg) |
| Warranty | 5 year warranty |



866.446.3595

Built for Users.™

sales@digital-watchdog.com

www.digital-watchdog.com

