

Datasheet

DWSR104UBT - Spring Return Universal Door Operator

Product description

The DIGIWAY SR offers high quality and high performance door automation, assisted by a chain driven spring mechanism. The satin anodised aluminium finish gives further aesthetic looks.

DIGIWAY is an up-to-date door automation solution, with a LCD programming display, counting a vast selection of advanced settings to suit your installation. Suitable for single/double doors, inward/outward opening, left or right handed and with fail safe or fail secure locking.

Suitable for people with reduced mobility, the SR is ideal for high traffic sites such as front doors or commercial sites.

This universal unit contains 2 arms (articulated and sliding) to full fill your installation needs.

Key features

- Heavy duty door operator
- 60 minutes fire rated - EN1634-1
- Semi-automatic (spring return) & Fully automatic (motor return)
- Built in programmer & receiver
- Articulated and sliding arm included
- Bluetooth plug-in for programming via smartphone app



 Certification

 DEEE

RoHS Certification

 IP40

 -13°F to 131°F
(-25°C to 55°C)

Product Information

Material: Satin anodized aluminum (SAA)

Operating Mode: Fully automatic, Semi-automatic,
Always open, Door free

Operating class: 5 (Heavy Duty)


Max Door Opening Angle: 110°

Receiver Frequency: 433.92 MHz

Transmitter Memory: 50

Transmitter Encoding: Keeloq® Hopping Code

Weight: 30.8 lb, 14 kg

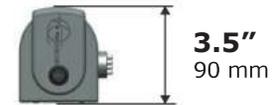

Electrical Specifications


Power supply: 24V DC or 18V AC

Power for auxiliary devices: 12V DC / 500 mA (max)

Power for electrolock: 12V DC / 1A (max) or
24V DC / 0.5A (max)

Max current: 100W

Usage

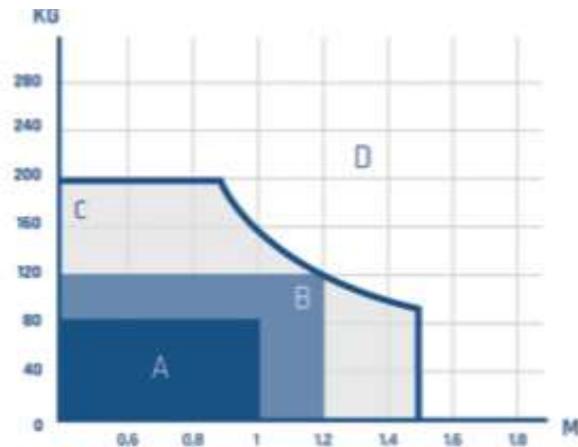

Zone A: Very intensive use (600 cycles/day)

Zone B: Intensive use (200-300 cycles/day)

Zone C: Use with reduced speed

Zone D: Do not use