


eFlow6N Series

Power Supply/Chargers



Altronix eFlow6N series power supply/chargers convert a 120VAC 60Hz input into a single, eight (8) or sixteen (16) fused outputs or PTC protected Class 2 power-limited outputs. Power supply/charger is selectable for 12VDC or 24VDC with a total of 6A max. supply current. It also offers a suite of features that includes fire alarm disconnect, overvoltage protection, and low power disconnect which prevents deep discharge of stand-by batteries.

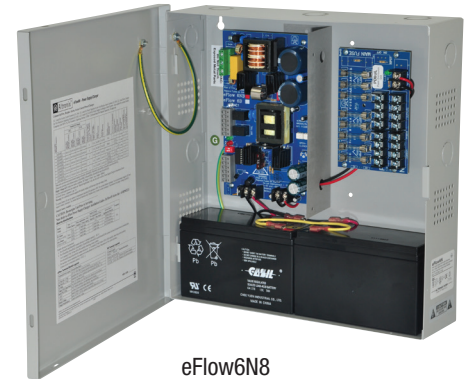

eFlow6N8

Key Features

- Available with 1, 8 or 16 outputs
- Fused outputs or PTC protected Class 2 power-limited outputs
- Additional aux. Class 2 power-limited output rated @ 1A
- Overvoltage protection
- Fire alarm disconnect
- Supervision
 - AC Fail
 - Battery Fail and Battery Presence
 - Low power shutdown
- Built-in charger for sealed lead acid or gel type batteries
- Instantaneous transfer to stand-by batteries
- Short circuit and overload protection
- AC input and DC output LED indicators
- UL Listed in the U.S. and Canada
- CE European Conformity
- Lifetime Warranty

eFlow6N series Power Supply Configuration Reference Chart

Altronix Model Number	Input Rating: 120VAC, 60Hz	Input Fuse Rating	Battery Fuse Rating	Nominal DC Outputs				Maximum Supply Current for Main and Aux. Outputs (A)	Ripple Voltage (mV) Under low battery condition	Power Distribution Module(s)	Number of Outputs	Fused Outputs Ratings	Auto-Resettable PTC Outputs Ratings	Accommodates up to 7AH Batteries	Accommodates up to 12AH Batteries
				[DC]		[AUX]									
				12VDC Output Range (V)	24VDC Output Range (V)	12VDC Output Range (V)	24VDC Output Range (V)								
eFlow6N	3.5A	5A/250V	10A/32V	10.0-13.2	20.19-26.4	10.03-13.2	20.19-26.4	6A	910	N/A	1	-	-	✓	-
eFlow6NX				10.0-13.2	20.19-26.4	10.03-13.2	20.19-26.4					-	-	-	✓
eFlow6N8	3.5A	5A/250V	10A/32V	10.0-13.2	20.19-26.4	10.03-13.2	20.19-26.4	6A	910	PD8UL	8	2.5A	-	✓	-
eFlow6NX8				10.0-13.2	20.19-26.4	10.03-13.2	20.19-26.4					2.5A	-	-	✓
eFlow6N8D	3.5A	5A/250V	10A/32V	9.78-13.2	20.0-26.4	10.03-13.2	20.19-26.4	6A	910	PD8ULCB	8	-	2A	✓	-
eFlow6NX8D				9.78-13.2	20.0-26.4	10.03-13.2	20.19-26.4					-	2A	-	✓
eFlow6N16	3.5A	5A/250V	10A/32V	10.0-13.2	20.19-26.4	10.03-13.2	20.19-26.4	6A	910	PD16W	16	2.5A	-	✓	-
eFlow6NX16				10.0-13.2	20.19-26.4	10.03-13.2	20.19-26.4			2 - PD8UL		2.5A	-	-	✓
eFlow6N16D	3.5A	5A/250V	10A/32V	9.78-13.2	20.0-26.4	10.03-13.2	20.19-26.4	6A	910	PD16WCB	16	-	2A	✓	-
eFlow6NX16D				9.78-13.2	20.0-26.4	10.03-13.2	20.19-26.4			2 - PD8ULCB		-	2A	-	✓

Lifetime Warranty

Specifications

Input

Voltage	120VAC, 60Hz, 3.5A max.
Fusing	5A / 250V

Outputs

Voltage	12VDC or 24VDC selectable
Current	6A continuous max.
Protection	Fused 2.5A / PTC 2A
Auxiliary	Class 2 power-limited @ 1A (unswitched)
Other	Overvoltage protection Filtered and regulated

Back-up Battery *(not included)*

Capacity	7AH/12VDC (1 or 2 within enclosure) 12AH/12VDC (requires larger "X" enclosure) 40AH/65AH (requires separate enclosure)
Type	Sealed lead acid or gel type
Fuse Rating	10A/32V
Failover	Upon AC loss, instantaneous

Fire Alarm Disconnect

Supervised	Latching or non latching
EOL 1	10K Resistor

Supervision

AC Failure	Form "C" contacts
Battery	Form "C" contacts

Low DC Power Shutdown

Shuts down DC output terminals if battery voltage drops below 71-73% for 12V units and 70-75% for 24V units (depending on the power supply). Prevents deep battery discharge

Indicators (LED)

Input	120VAC is present
DC Output	Powered

Agency Listings

UL:	
UL294	Access Control System Units
UL603	Power Supplies for Use with Burglar-Alarms Systems
UL1481	Power Supplies for Fire Protective Signaling Systems
cUL:	
ULC-S318-96	Power Supplies for Burglar Alarm Systems Also suitable for Access Control
CSFM	California State Fire Marshall Approved
CE	European Conformity

Physical and Environmental

Dimensions (H x W x D)

eFlow6NV, eFlow6N8(D)V, eFlow6N16(D)V:

Enclosure: 13.5" x 13" x 3.25" (342.9mm x 330.2mm x 82.55mm)

Shipping: 15" x 13.875" x 4.75" (381mm x 352.4mm x 120.6mm)

eFlow6NXV, eFlow6NX8(D)V, eFlow6NX16(D)V:

Enclosure: 15.5" x 12" x 4.5" (393.7mm x 304.8mm x 114.3mm)

Shipping: 16.5" x 13.5" x 6" (419.1mm x 342.9mm x 152.5mm)

Weight (approx.)

Model	Product Weight	Shipping Weight
eFlow6N	6.5 lb. (2.95 kg)	7.4 lb. (3.3 kg)
eFlow6NX	8.55 lb. (3.88 kg)	9.65 lb. (4.38 kg)
eFlow6N8(D)	6.65 lb. (3.02 kg)	7.55 lb. (3.42 kg)
eFlow6NX8(D)	8.5 lbs. (3.86 kg)	9.6 lb. (4.35 kg)
eFlow6N16(D)	6.8 lb. (3.08 kg)	7.7 lb. (3.49 kg)
eFlow6NX16(D)	8.65 lb. (3.92 kg)	9.75 lb. (4.42 kg)

Temperature


Operating: 0°C to 49°C (32°F to 120°F)

Storage: -20°C to 70°C (-4°F to 158°F)

Relative Humidity 85% +/- 5%

BTU/Hr (approx.) 12VDC: 37 BTU/Hr.
24VDC: 74 BTU/Hr.

Accessories (order separately)



LINQ2

LINQ2 - Network Supervision

Altronix LINQ2 Network Communication Module provides remote supervision, control and monitoring over LAN/WAN

- Remotely reports accurate power diagnostics
- Controls power and resets devices
- Reports system diagnostics via Email



Lifetime Warranty