



HDA-912

4K HDMI Audio Extractor With Optical and L/R outputs & 10 Bit HDR Pass-through

The **HDA-912** is an HDMI audio extractor that retrieves audio from any HDMI-compliant source, such as a set-top box or media player, and outputs it through Optical and 3.5mm Stereo ports. Compliant with HDMI 2.0b and HDCP 2.2, it supports video resolutions up to 4K@60Hz. The optical port handles LPCM 2CH, Dolby Digital 2/5.1CH, and DTS 2/5.1CH formats, while the 3.5mm port supports PCM 2.0 audio. It offers 10-bit HDR pass-through and 192kHz audio sampling. Its compact design suits both personal and commercial setups.

DIMENSIONS & WEIGHT:
Length: 73.5mm/2.89in **Width:** 60.7mm/2.34in
Height: 17mm/0.67in **Weight:** 130g/4.59oz

PACKAGE CONTENTS: 1x HDA-912, 1x Power Adapter, User Manual

KEY FEATURES:

- HDMI 2.0b & HDCP 2.2 Compliant.
- 18Gbps video Bandwidth.
- Video resolution up to 4K@60hz
- 10bit HDR pass-through for enhanced color quality
- Digital and Analog audio output through Optical and 3.5mm Stereo ports
- High bit rate HDMI audio pass-through
- Audio sampling rates up to 192kHz
- Compact and robust design

SPECIFICATIONS

CONNECTIVITY:	
INPUT:	1 × HDMI [Type A , 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female]
	1 × L/R [3.5mm Stereo Mini-jack]
	1 × Optical [S/PDIF]
COMPLIANCES:	
HDMI Compliance	: HDMI 2.0b
HDCP Compliance	: HDCP 2.2
SUPPORTED HDMI CABLES:	
HDMI 2.0/2.1	: We recommend using high quality HDMI 2.0/2.1 cables under 30 feet for optimum performance
SUPPORTED RESOLUTION:	
Up to 4K@60Hz	
VIDEO OUTPUT:	
Video Bandwidth	: 18 Gbps
Video Resolutions	: Up to 4K@30Hz

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

AUDIO SUPPORT:

HDMI Audio Formats	: LPCM 2/5.1/7.1CH, Dolby Digital, DTS 5.1, Dolby Digital+, Dolby TrueHD, DTS-HD Master Audio, Dolby Atmos, DTS:X
Optical Audio Formats	: LPCM 2CH, Dolby Digital 2/5.1CH, DTS 2/5.1CH
L/R Audio Formats	: LPCM 2.0



POWER:

Power Consumption	: 1W (Max)
Power Supply:	Input : AC 100-240V 50/60Hz
	Output : DC 5V/1A





CONNECTION DIAGRAM

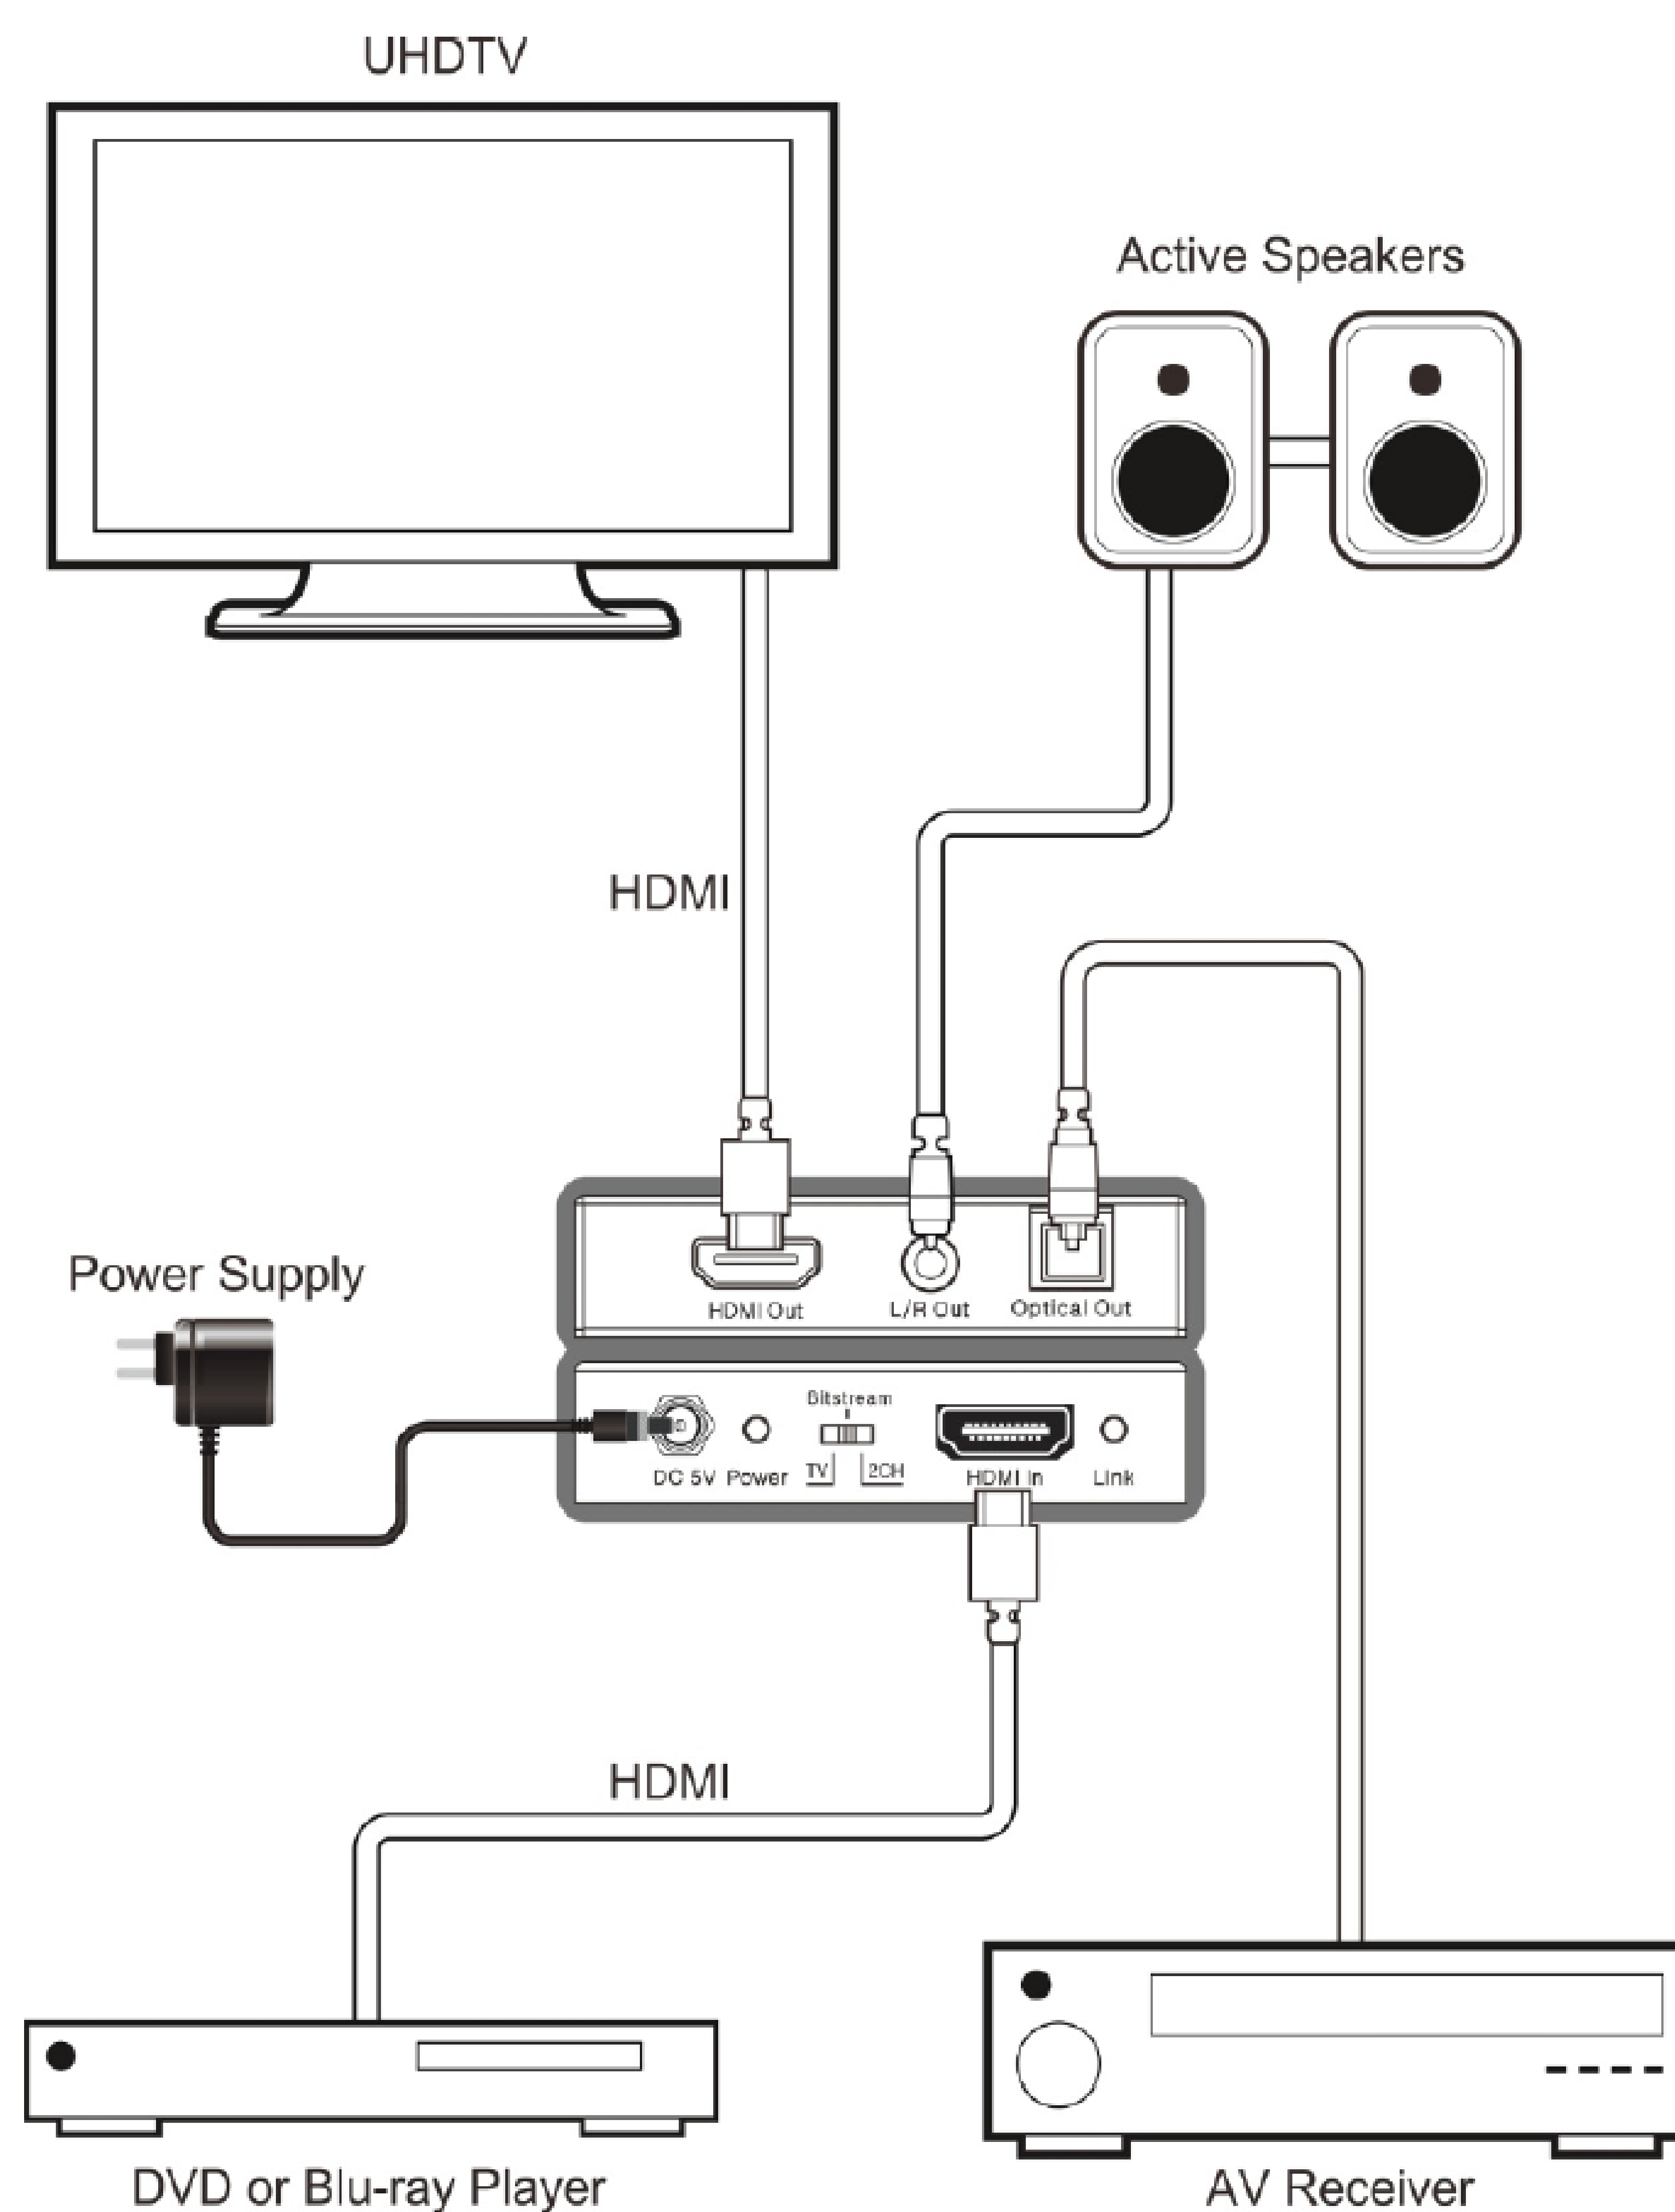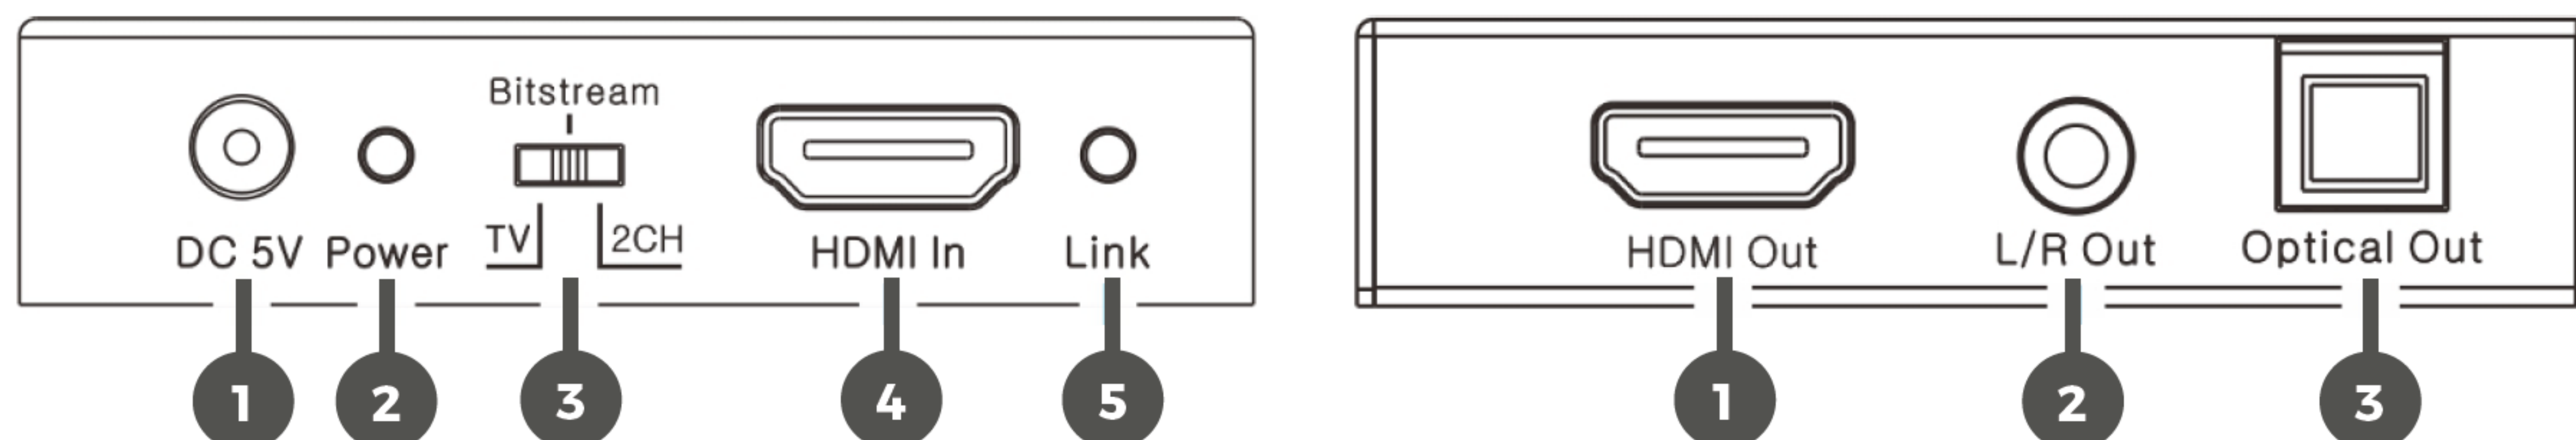

OVER 10 YEARS
EXPERIENCE



FULL 1 YEAR
LIMITED WARRANTY