

HDA-913

4K HDMI Audio Extractor with Toslink, L/R, Standard HDMI Audio Output & Audio downmixing



DIMENSIONS & WEIGHT:

Length: 73.5mm / 2.89in **Width:** 60.7mm / 2.39in
Height: 20mm / 0.79in **Weight:** 135g / 4.76oz

The **HDA-913** is an HDMI audio extractor that downmixes in real-time and provides multi-channel output via HDMI, optical, and L/R RCA ports. It is HDMI 2.0b and HDCP 2.2 compliant, with a video bandwidth of up to 18Gbps. It supports video resolutions up to 4K@60Hz 4:4:4 with 10bit HDR for video pass-through. Supported audio formats include LPCM 2CH, Dolby Digital 2/5.1CH, and DTS 2/5.1CH, with sampling rates up to 192kHz. It also supports high bit rate audio pass-through. Compact design and easy installation. Ideal for commercial and personal setups.

PACKAGE CONTENTS: 1x HDA-913, 1x Power Adapter, User Manual

KEY FEATURES:

- HDMI 2.0b and HDCP 2.2 compliant
- 18Gbps video bandwidth
- Video resolutions up to 4K@60Hz with 24-bit RGB/YCbCr 4:4:4
- HDR10 pass-through for enhanced color quality support.
- Audio support for audio formats like LPCM 2CH, Dolby Digital 2/5.1CH, DTS 2/5.1CH.
- Audio Extraction from your HDMI sources to connect speaker systems with optical and L/R input ports
- Simultaneous audio output via HDMI, coaxial, Toslink & L/R ports with the help of audio downmixing.
- Compact design for easy and flexible installation
- Perfect for commercial and personal setups

SPECIFICATIONS

CONNECTIVITY:

INPUT:	1 × HDMI [Type A, 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female]
	1 × Optical Output [S/PDIF]
	1 × Coaxial
	1 × L/R AUDIO OUT [RCA red & white]

SUPPORTED HDMI CABLES:

HDMI 2.0/2.1	: We recommend using high quality HDMI 2.0/2.1 cables under 30 feet for optimum performance
--------------	---

COMPLIANCES:

HDMI Compliance	: HDMI 2.0b
HDCP Compliance	: HDCP 2.2

ADDITIONAL FEATURES

CEC Function	: Yes
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: Yes
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

AUDIO SUPPORT:

HDMI Audio Formats	: LPCM, Dolby Digital, Dolby Digital Plus, Dolby TrueHD, DTS, DTS-HD Master
Optical Audio Formats	: LPCM 2CH, Dolby Digital 2/5.1CH, DTS 2/5.1CH
L/R Audio Formats	: Analog Stereo 2CH




POWER:

Power Consumption	: 1.25W (Max)
Power Supply:	Input: AC 100-240V 50/60Hz Output : DC 5V/1A





CONNECTION DIAGRAM

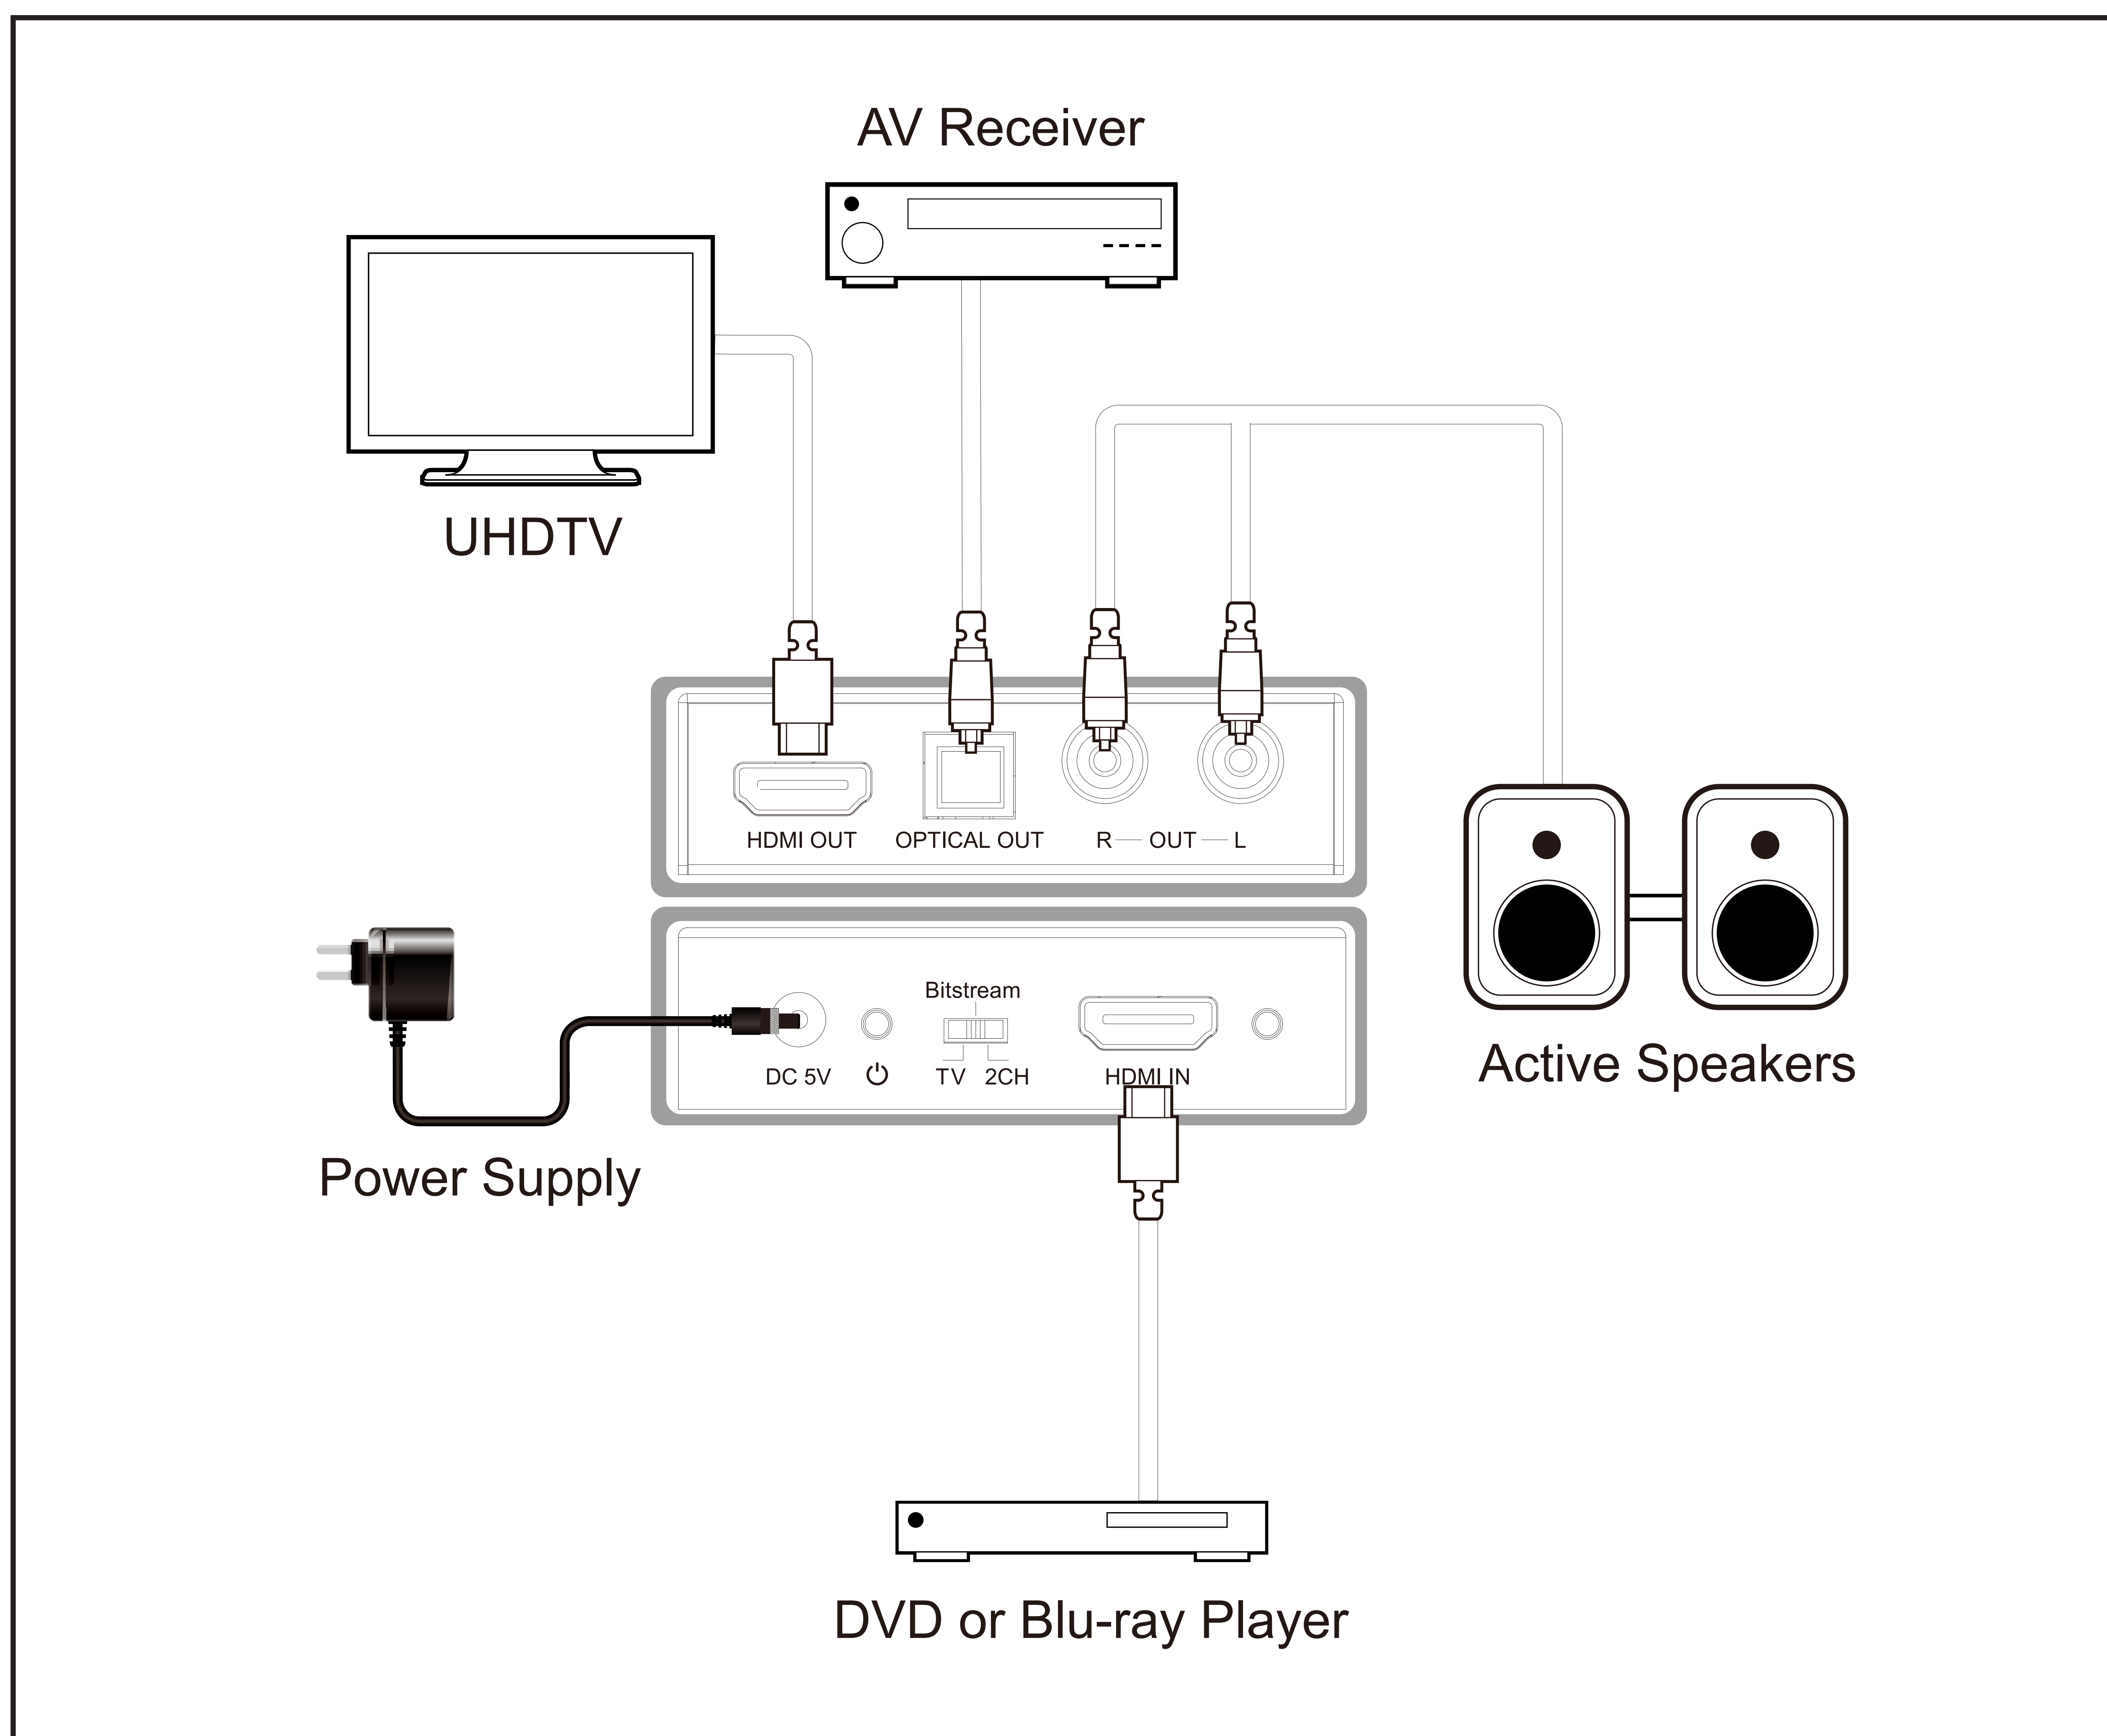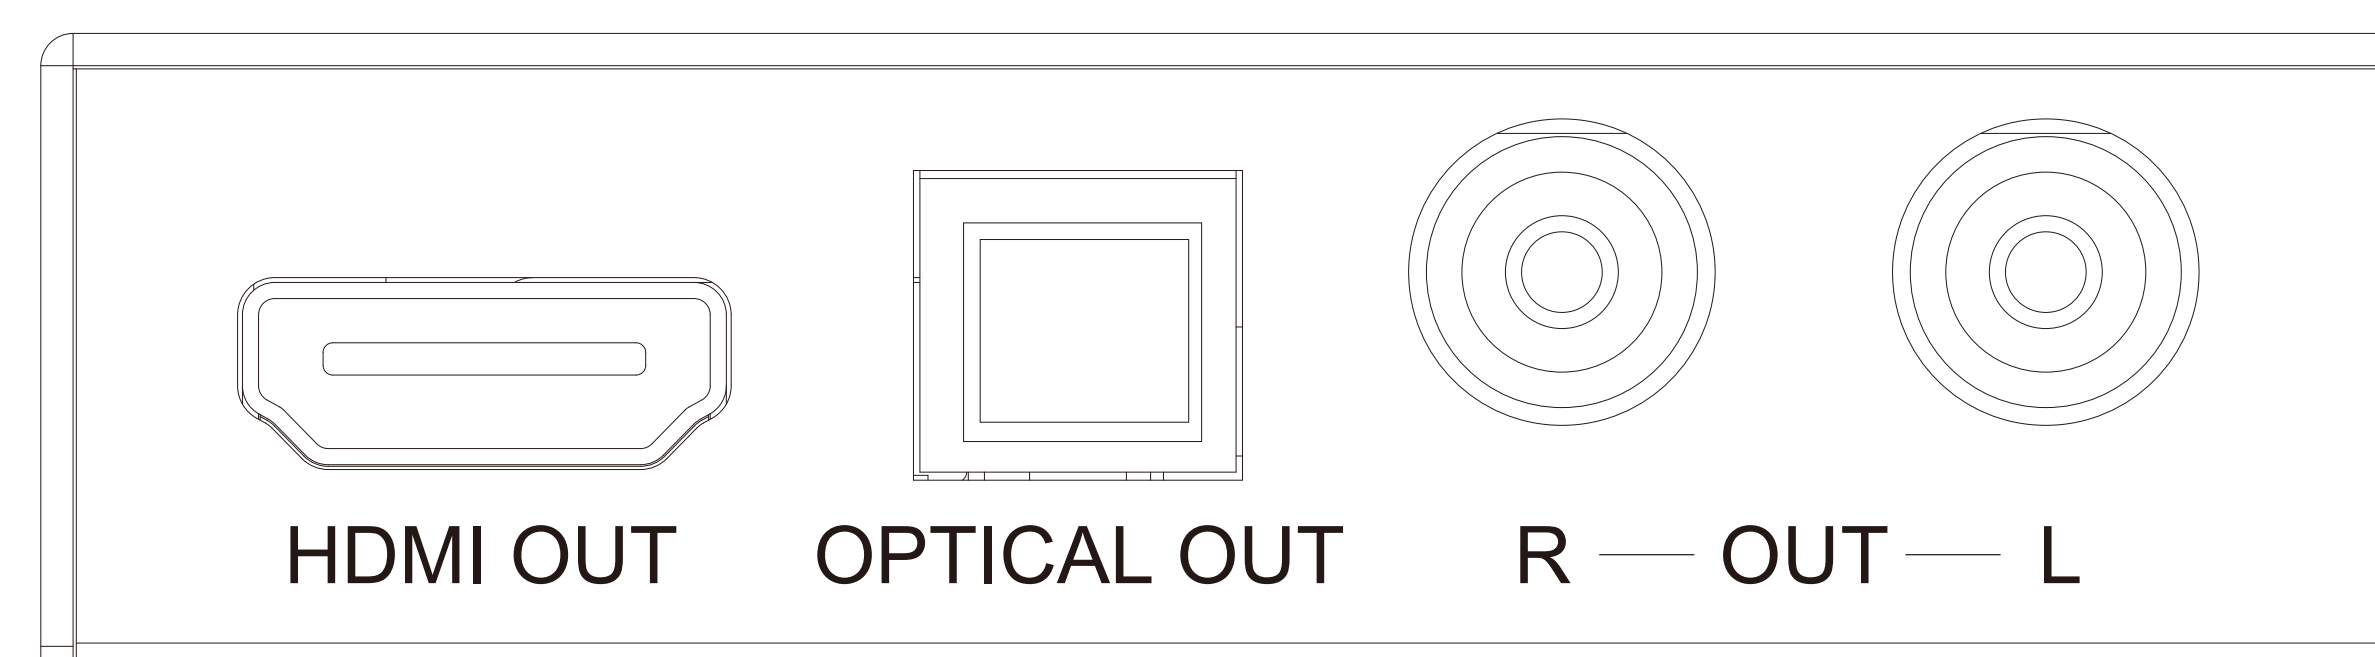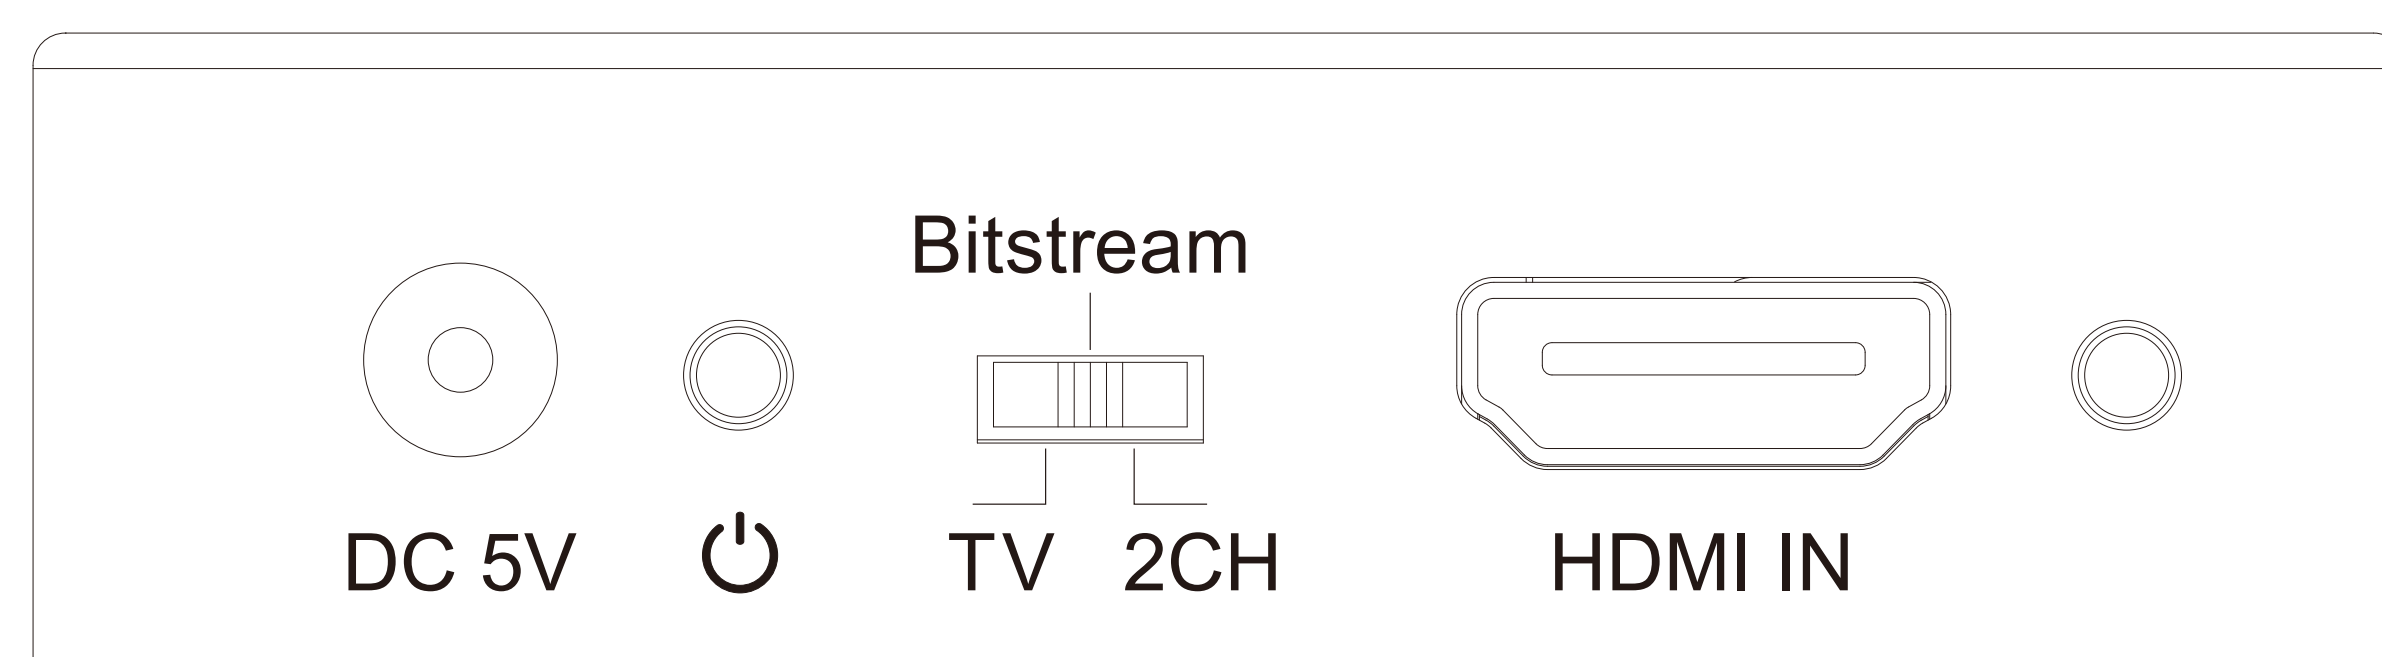

OVER 10 YEARS
EXPERIENCE

