



HDA-939

HDMI ARC/eARC Audio Extractor with HDMI ARC/eARC, Toslink, Coaxial, L/R, Standard HDMI Audio Output, Audio downmixing & RS-232

The **HDA-939** is an HDMI audio extractor with downmixing functionality that extracts audio from an HDMI source or ARC/eARC display, providing output via HDMI OUT 1 (for ARC/eARC soundbars), HDMI OUT 2 (for AVRs), optical, coaxial, and L/R ports simultaneously. It supports video resolutions up to 4K@60Hz 4:4:4 and is HDMI 2.0b & HDCP 2.2 compliant. It supports audio formats up to Dolby Atmos and DTS-X. Control via DIP switches and RS-232. Compact and robust design, perfect for commercial and personal setups.

DIMENSIONS & WEIGHT:

Length: 214mm/8.43in **Width:** 117mm/4.61in
Height: 25mm/0.98in **Weight:** 605g/21.34oz

PACKAGE CONTENTS: 1x HDA-939, 1x 3pin Phoenix Connector, 2x Mounting Ears, 4x Machine screws, 1x Power Adapter, User Manual

KEY FEATURES:

- HDMI 2.0b and HDCP 2.2 compliant
- 18Gbps video bandwidth
- Video resolutions up to 4K@60Hz with 24-bit RGB/YCbCr 4:4:4
- HDR10+, Dolby Vision, and HLG pass-through
- Audio support for audio formats up to Dolby Atmos and DTS: X.
- ARC/eARC Audio Extraction from your HDMI sources to connect with soundbars with ARC/eARC HDMI ports
- Dedicated HDMI audio output port to connect AVR (receivers) with non ARC/eARC HDMI input ports.
- Simultaneous audio output via HDMI, coaxial, Toslink & L/R ports with the help of audio downmixing.
- Advanced EDID management with 8 DIP switches for mode adjustments.
- Compact design for easy and flexible installation

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: Yes
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: Yes
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: Yes

AUDIO SUPPORT:

HDMI Audio Formats	: LPCM, Dolby Digital, Dolby Digital Plus, Dolby TrueHD, DTS, DTS-HD Master
--------------------	---

POWER:

Power Consumption	: 4W (Max)
Power Supply:	Input: AC 100-240V 50/60Hz Output : DC 12V/1A

SPECIFICATIONS

CONNECTIVITY:

INPUT:	1 × HDMI [Type A , 19-pin female]
OUTPUT:	2 × HDMI [Type A, 19-pin female]
	1 × Optical Output [S/PDIF]
	1 × Coaxial
	1 x L/R AUDIO OUT [RCA red & white]
CONTROL:	1 x RS-232 [3pin-3.81mm phoenix connector]

SUPPORTED HDMI CABLES:

HDMI 2.0/2.1	: We recommend using high quality HDMI 2.0/2.1 cables under 30 feet for optimum performance
--------------	---

COMPLIANCES:

HDMI Compliance	: HDMI 2.0b
HDCP Compliance	: HDCP 2.3





OVER 10 YEARS
EXPERIENCE





CONNECTION DIAGRAM

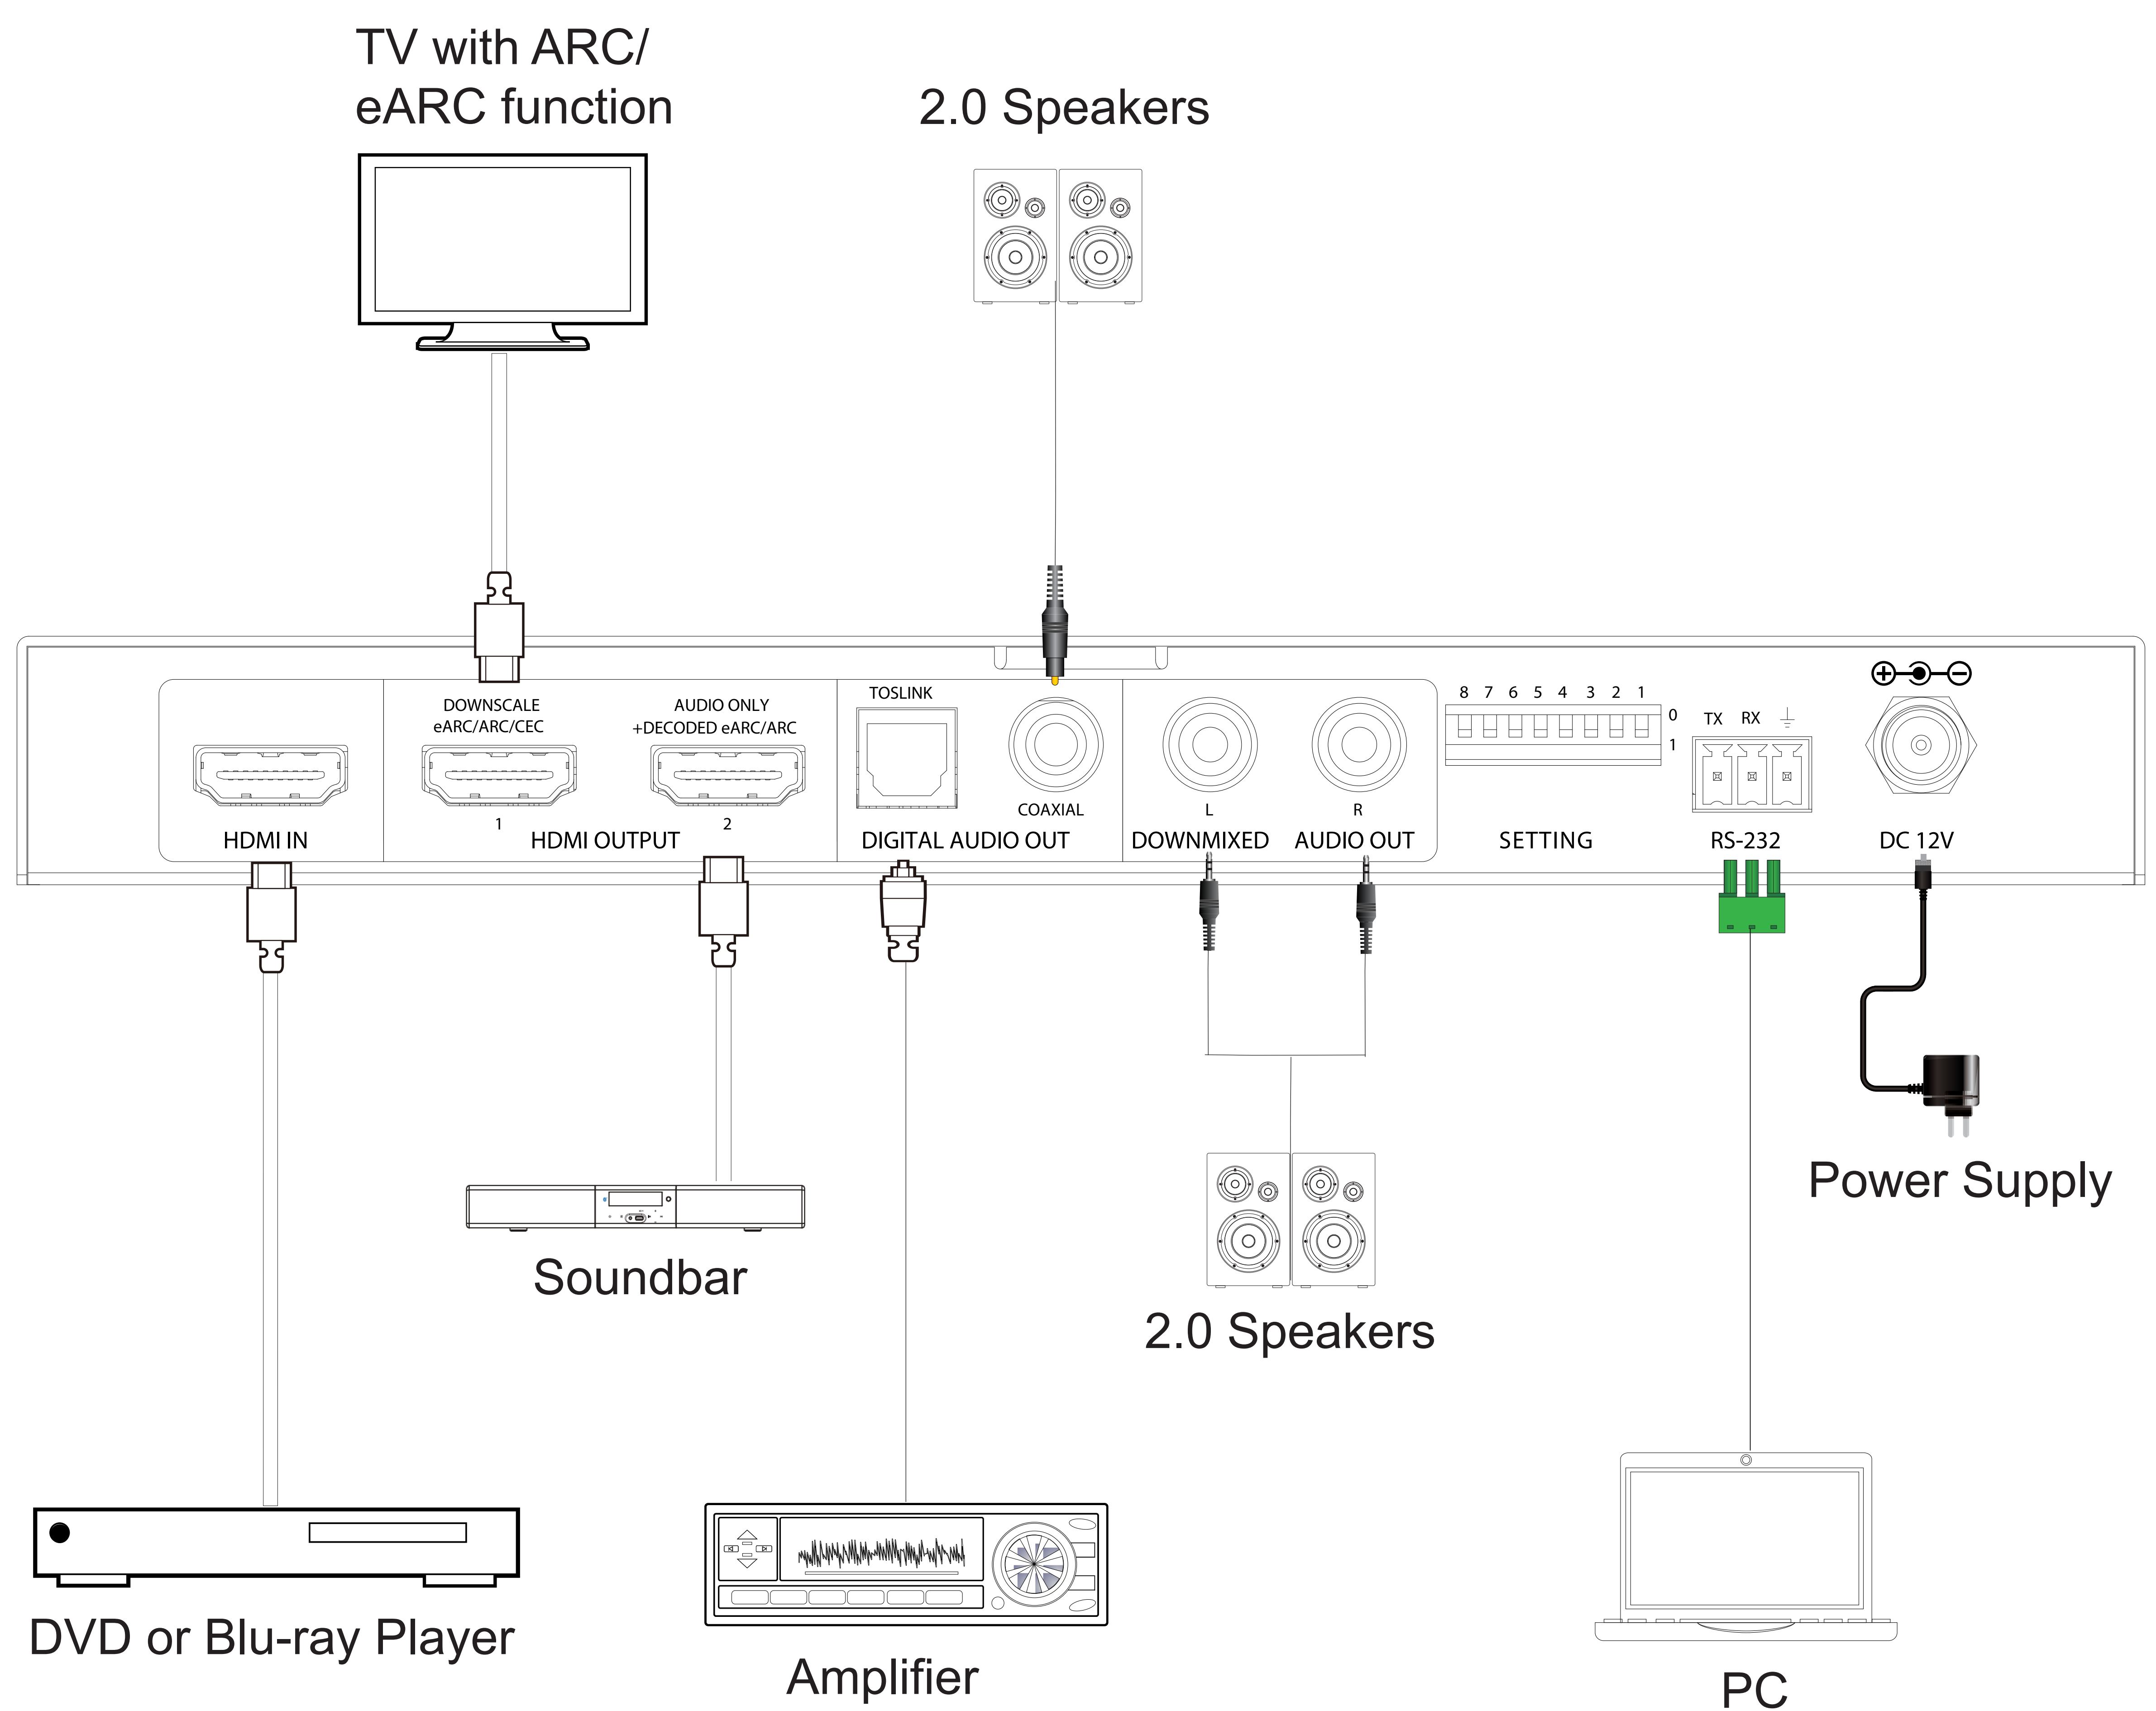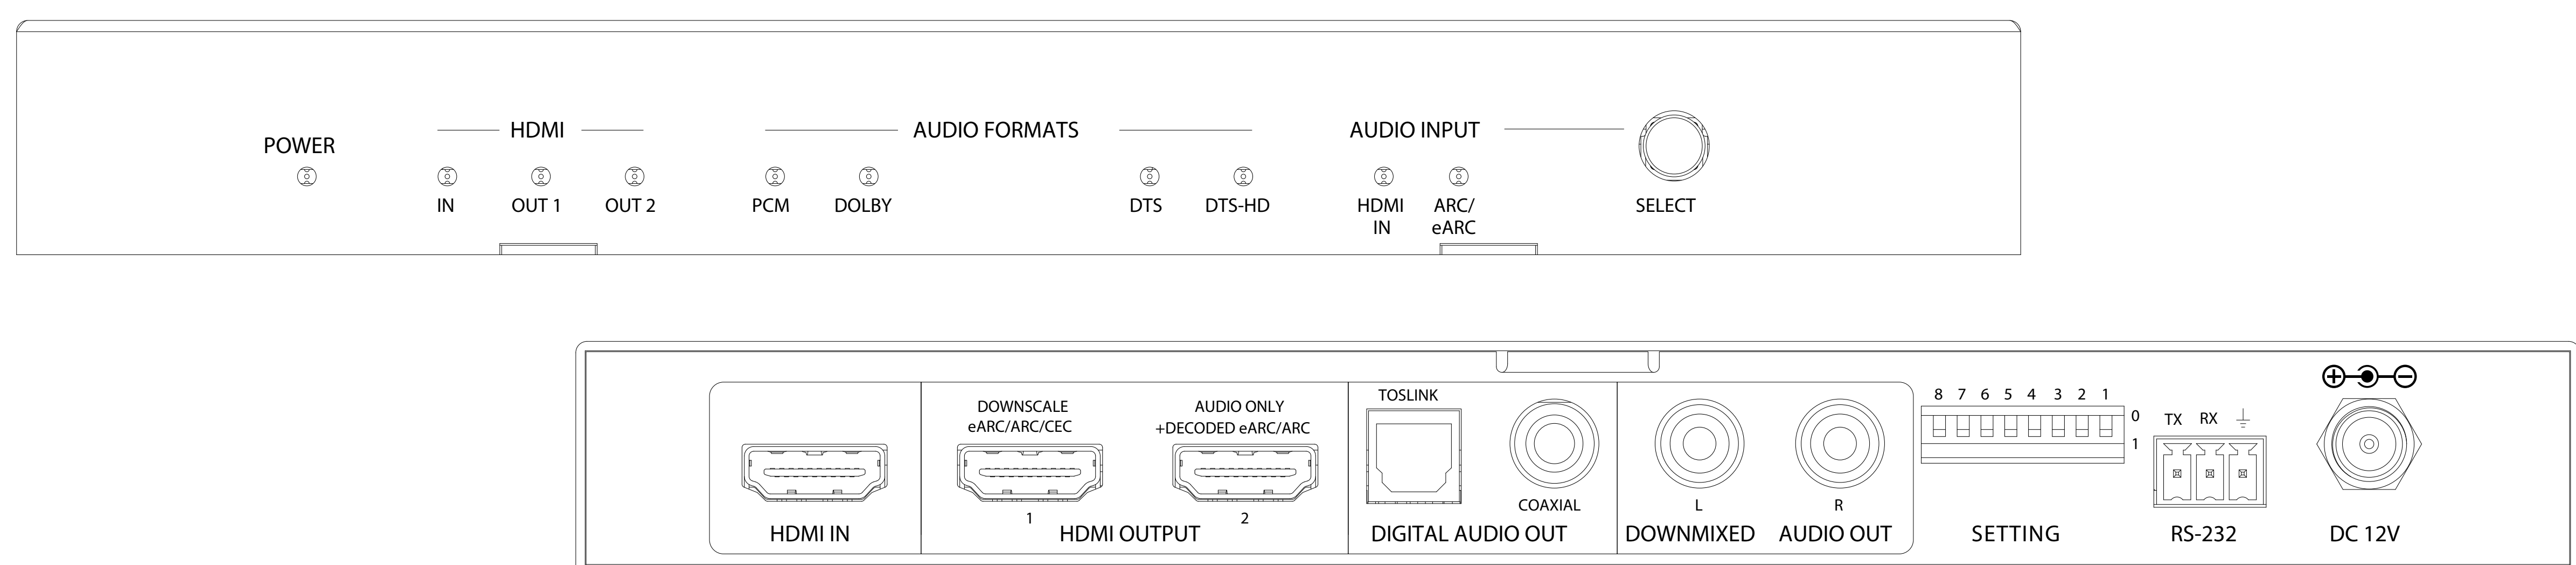

OVER 10 YEARS
EXPERIENCE



FULL 1 YEAR
LIMITED WARRANTY