



HDS-401MV

4K HDMI Quad Multi-viewer 4x1

The OREI **HDS-401MV** is a seamless 4x1 quad multi-viewer switch, displaying 4 HDMI inputs simultaneously on one screen. It supports resolutions up to 4K@30Hz and is HDMI 1.4b and HDCP 1.4 compliant. With a VGA output for resolutions up to 1920x1200@60Hz, it allows simultaneous usage alongside HDMI output. Featuring a 3.5mm Analog stereo output for audio extraction from one input at a time, it offers 4 Multiview modes. Easily controlled via front panel buttons and included remote, ideal for home theatre setups.

DIMENSIONS & WEIGHT:
Length: 185mm/7.28in **Width:** 128mm/5.04in
Height: 20mm/0.79in **Weight:** 595g/1.31lbs

PACKAGE CONTENTS: 1x HDS-401MV, 1x Remote Control, 2x Mounting brackets, 1x Power Adapter, User Manual

KEY FEATURES:

- HDMI 1.4 & HDCP 1.4 Compliant
- Video resolution up to 4K@30Hz
- 10.2Gbps video bandwidth
- 4 In 1 Out Quad Multiviewer
- Features a VGA output which can be used simultaneously with HDMI
- VGA output supports up to 1920x1200@60Hz resolution
- Analog 3.5mm stereo output for audio extraction from any one input at a time
- 4 different multiview modes
- It can also be used a 4x1 HDMI Switch
- Control via front panel and the IR Remote

SPECIFICATIONS

CONNECTIVITY:

INPUT:	4 × HDMI [Type A, 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female]
	1 × L/R [3.5mm Stereo Jack]
	1 × VGA [VGA-D]
CONTROL:	1 × Micro USB [Update port]

COMPLIANCES:

HDMI Compliance	: HDMI 1.4b
HDCP Compliance	: HDCP 1.4

SUPPORTED HDMI CABLES:

HDMI 2.0/2.1	: We recommend using high quality HDMI 2.0/2.1 cables under 30 feet for optimum performance
--------------	---

EXTENDING DISTANCE:

4K@30Hz	: 30 Feet
---------	-----------

VIDEO OUTPUT:

Video Bandwidth	: 10.2Gbps
Video Resolutions	: Up to 4K@30Hz

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: Yes
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

AUDIO SUPPORT:

HDMI Audio Formats	: PCM2.0
Analog Audio Formats	: LPCM2.0

POWER:

Power Consumption	: 7.68W (Max)
Power Supply:	Input : AC 100-240V 50/60Hz
	Output : DC 12V/1A





OVER 10 YEARS
EXPERIENCE





CONNECTION DIAGRAM

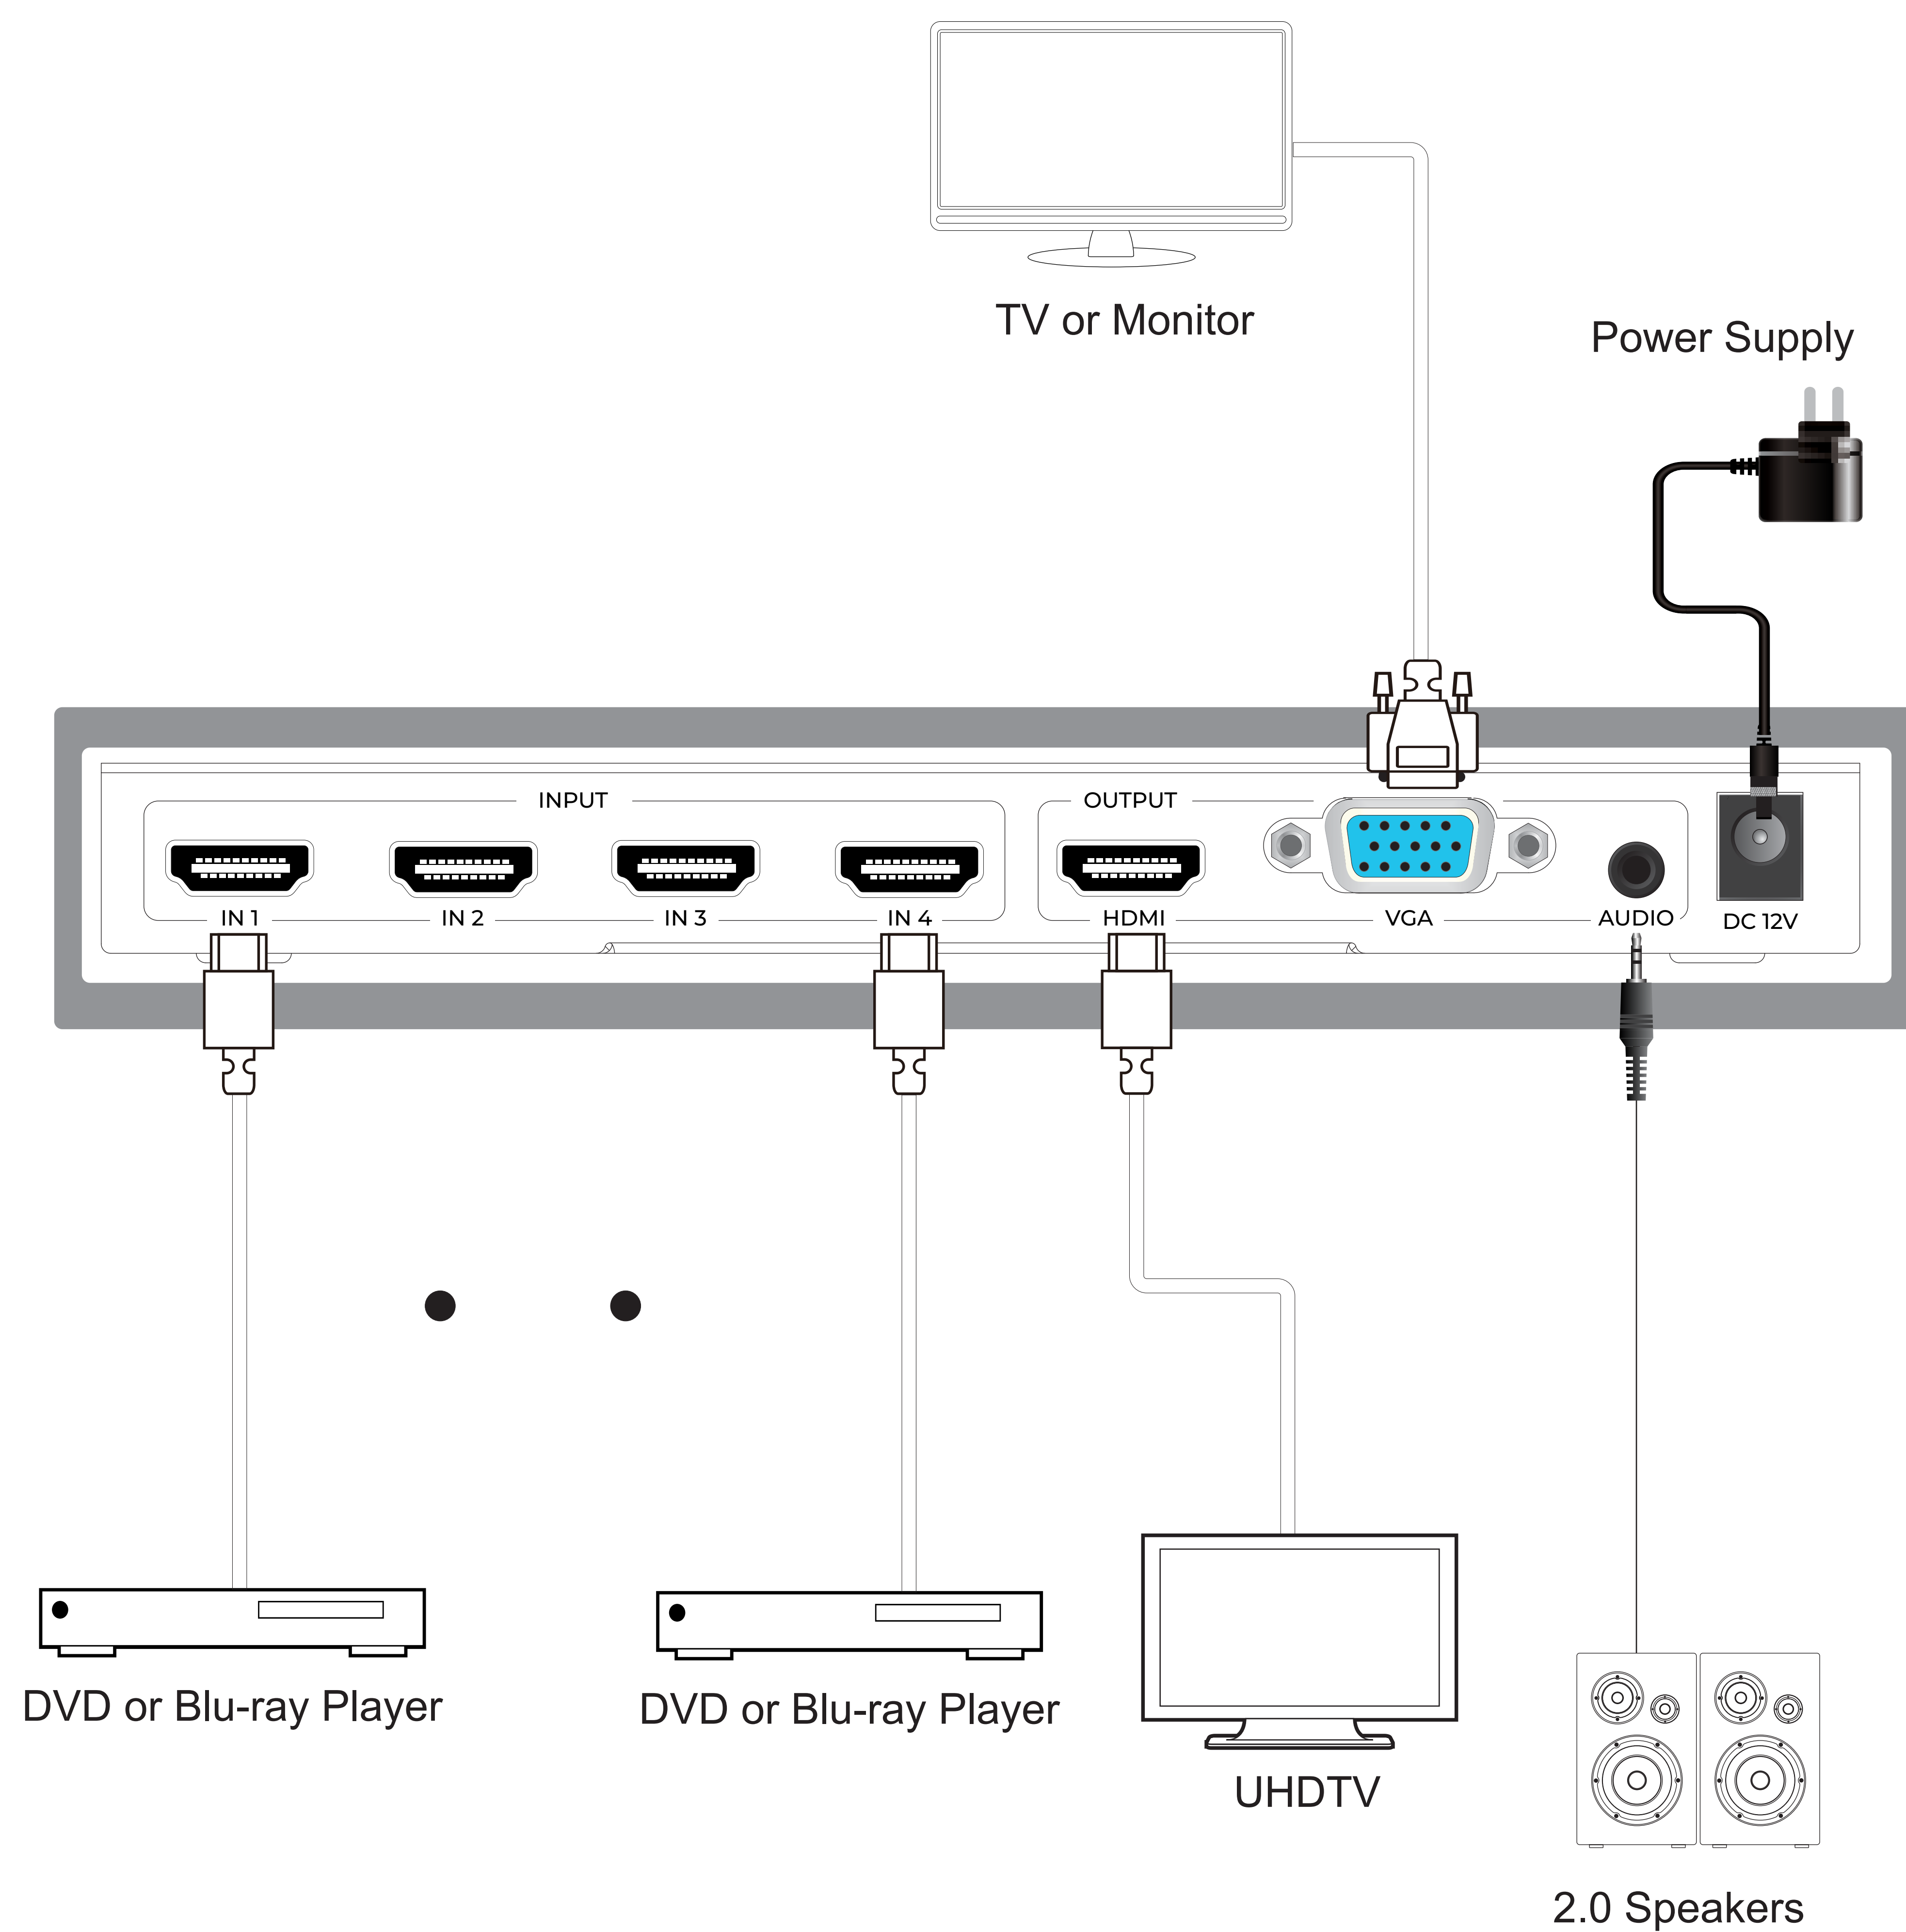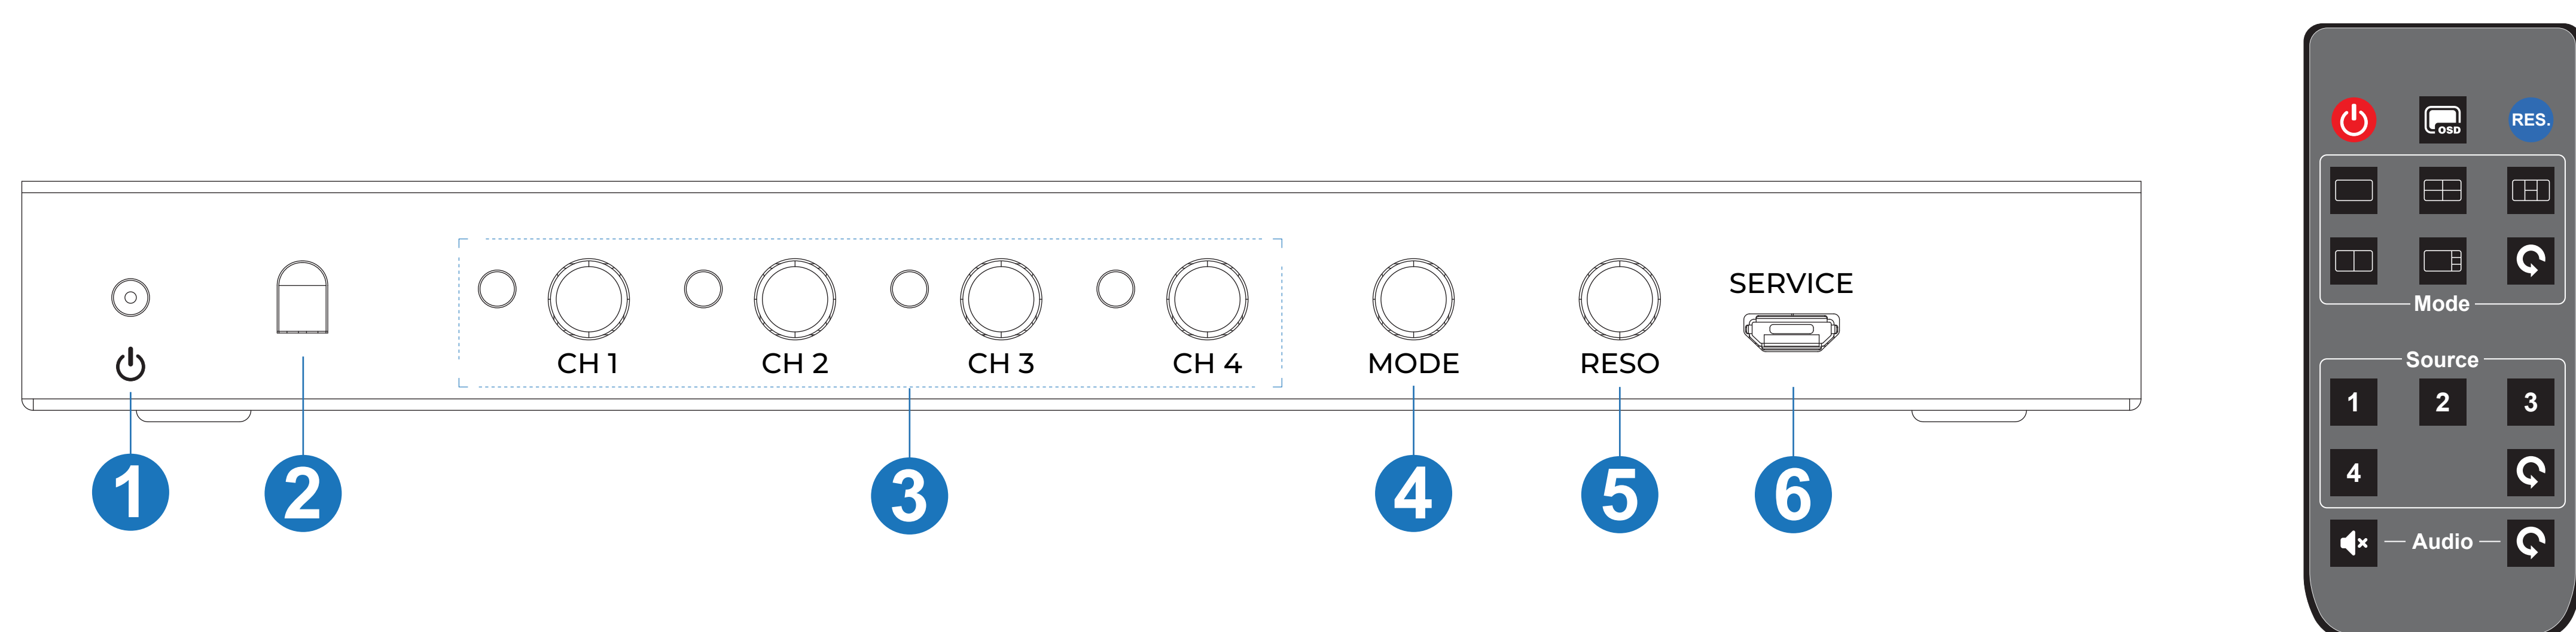

OVER 10 YEARS
EXPERIENCE

