




HNC328-VBZ

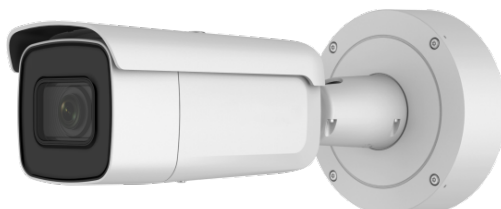

FEATURES

8MP WDR VF Motorized Zoom Bullet, Exterior

- 8Megapixel High Resolution
- Full HD 1080p Video Output
- Low Illumination
- Support H.265
- IP67 Rating
- IR Range: up to 150ft
- True Day / Night
- Motorized Zoom

| Specifications | |
|-------------------------|------------------------------------------|
| Model Number | HNC328-VBZ |
| Image Sensor | 1/2.5" progressive scan CMOS |
| Min. illumination | 0.01 lux @ (F1.2, AGC ON), 0 lux with IR |
| Shutter time | 1/3s ~ 1/100,000s |
| Lens | 2.8 - 12mm @ F1.6 |
| Day & night | IR cut filter with auto switch |
| Digital noise reduction | 3D DNR |
| Wide dynamic range | 120dB |
| Video compression | H.265+ / H.265 / H.264 / MJPEG / H.264+ |
| Max. Image Resolution | 3840 x 2160 |
| Frame rate | 15fps (3840 x 2160), 30fps (2560x1440) |
| Audio | 1/1 |

| Specifications | |
|-------------------------|-------------------------------------------------------------------------------------------|
| BLC | Yes, zone configurable |
| Network storage | NAS |
| Alarm | 1/1 |
| Protocols | TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos |
| Interoperability | ONVIF, PSIA, CGI |
| Security | User Authentication, reset button, flickerless, dual stream, heartbeat, mirror, watermark |
| Communication interface | 1 RJ45 10M/ 100 M Ethernet interface |
| Operating conditions | -30 °C ~ 60 °C (-22 °F ~ 140 °F) humidity 90% or less (non-condensing) |
| Power supply | 12 VDC +/- 10%, PoE (802.3af) |
| Power consumption | Max, 17.5W |
| Protection Level | IP67, IK10 |
| IR range | UP to 150ft |
| Dimension | □5.67" x 13.10" |
| Weight | 4.17 lbs |
| Electrical Box | Included |
| Pole,Corner | P:HTH-275ZJ,C:HTH-276ZJ |