



HD-TVI 2MP Intensifier® T Traditional Camera

HTINTT5T


Accepts C & CS auto iris & manual type lenses,
dark gray housing

Features

- Full HD resolution over coax (HD-TVI)
- See color in almost complete darkness without IR LEDs
- Supports Full HD 1080p @ 30fps
- No problems caused by objects that reflect or absorb IR light sources
- True WDR operation
- With presets for different scenarios
- Full OSD operation via UTC (TVI output only)
- Additional analog output for 960H
- 12VDC / 24VAC dual voltage operation
- 5 year warranty



lens not included

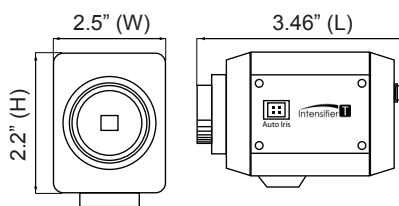

Specification

Image Sensor	1/3" Progressive Scan CMOS, 2MP	White Balance	ATW / Push / Manual
Resolution	1080p	Intensify	Auto / Off
Minimum Illumination	0.001 lux	Motion Detection	(selectable x2 - x512)
Max WDR	100dB	Privacy Masking	On / Off
Effective Pixels	1984 (H) x 1105 (V)	Speco DNR	(8 programmable zones)
Total Pixels	2000 (H) x 1121 (V)	Sharpness	On / Off (level adjustable)
TV System	NTSC	Mirror	On / Off
Scanning Frequency	15.734kHz (H) / 59.94Hz (V)	Power Consumption	12VDC, 150mA / 24VAC, 2W
Scanning System	Progressive	Power Supply	12VDC / 24VAC
Synchronization	Internal	Operating Temperature	dual voltage operation
Communication	UTC	Storage Temperature	(power supply not included)
S/N Ratio	More than 50dB	Dimensions	14° F - 122° F
Video Output	CVBS: 1.0Vp-p / 75 ohms	Weight	-4° F - 140° F
Electronic Shutter Speed	Auto / Manual		2.5" (W) x 2.2" (H) x 3.46" (L)
OSD	Available		1.5 lbs.
DWDR	On / Off (level adjustable)		
Backlight Compensation	BLC / HLC / Off		
Day/Night	Color / BW / Auto / Ext		
AGC	Level Adjustable		

Optional Accessories



PSW5
12VDC
Power Supply



TVIUTPPT
HD Video
Transceiver with
Pigtail (Balun)



TVIUTP
HD Video
Transceiver



PSW4
24VAC
Power Supply



VCH401HBM T
Housing with Heater,
Blower & Bracket

Optional Lenses

VFMP2.812DC5

2.8-12mm megapixel
varifocal lens

NDAA
COMPLIANT

*Products are in compliance
with NDAA Section 889 Part
B Guidelines