

Description


The **IPPTR12** is designed to provide 12 channels of surge protection for network devices. It is cost-effective and ideally suited for protecting multi-input devices such as a network hub, NVR, or groups of IP cameras or servers. The IPPTR12 is rack mountable in a standard 19" rack. It installs in minutes and provides a single easy access point for grounding.

Features

- Provides 12 channels of surge protection
- Works with PoE and non-PoE 10/100 equipment
- Fits standard 19" rack cabinets
- Easy to install

Specifications

Size	1 RU
Connection Method	Standard female BNC connectors (16 In—16 Out)
Clamping Voltage	2.8v
Insertion Loss	<0.2dB
Impedance	50 and 75 ohms
Temperature	-20°C to +65°C
Frequency	DC to 10 MHz
Shipping Weight	3 lbs

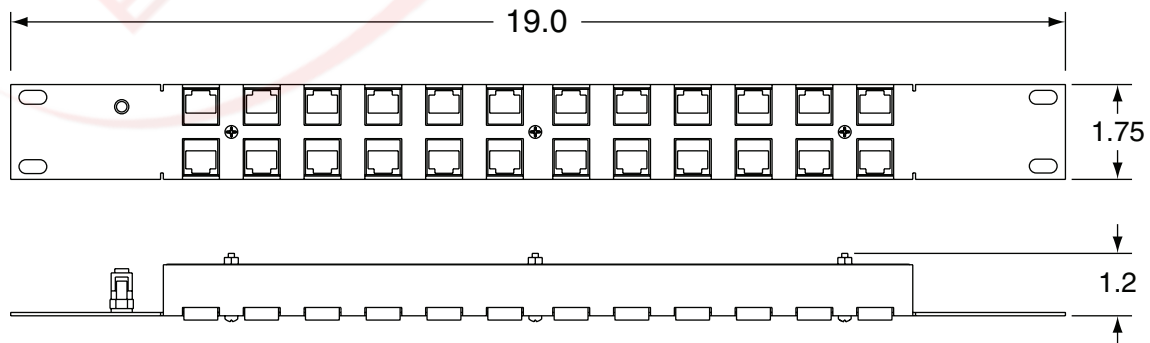

NITEK®

USA

5410 Newport Drive, # 24
Rolling Meadows, IL 60008
Phone: (847) 259-8900
Fax: (847) 259-1300
E-mail: info@nitek.net
WWW.NITEK.NET

EUROPE

De Schans 19-21 2a
8231 KA Lelystad
Tel: +31(0)320-2300005
Fax: +31(0)320-282186
E-mail: info@nitek.nl
WWW.NITEK.NL