

IPS05H15-EM

15W IP Horn Speaker with Mic


15W
AMPLIFIER




Key Features

- Two-way intercom communication
- Compatible with VoIP, SIP devices (IPPBX, IP Phone) via SIP
- Compatible with VMS/NVR via ONVIF
- Support HTTP API for alarm in transmit
- 30W amplifier, PoE Power Supply

Dimensions

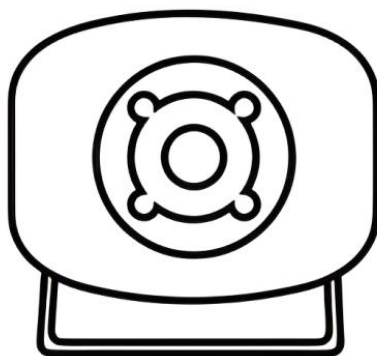

220

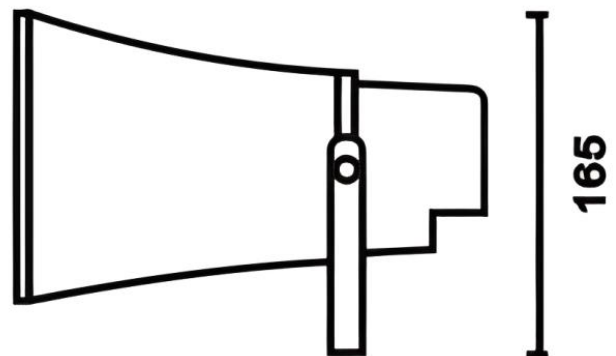

240

Specification

Audio	
Codec	G.711 PCMU 8 kHz, G.711 PCMA 8 kHz
MIC	
Built-in MIC	Yes
Speaker	
Max SPL	120dB
Frequency response	250Hz-8kHz
Frequency Range	500-2KHZ ± 10dB 400-12KHZ ± 20dB
Harmonic Distortion	0.1 @1kHz
Signal to Noise Ratio	91dB
Network	
Security	HTTPS encryption, basic and digest authentication for HTTP/HTTPS, TLS 1.1/1.2, WSSE and digest authentication for Open Network Video Interface
Network Protocol	SIP, ONVIF, HTTP, IPv4, DHCP, RTSP, RTP, RTCP, TCP, UDP, ARP, NTP
Network Interface	10/100 Base-TX, RJ45
VoIP	Support for SIP protocol for integration with VoIP systems, integrated with SIP/PBX.
	Support ONVIF protocol for interaction with security systems, integrated with ONVIF VMS/NVR. 2 SIP Accounts, RTP Multicast
	Support codecs:G711U, G711A
Amplifier	
Amplifier Description	Built-in 15W Amplifier
Interface	
Alarm Input	Alarm input * 2
Audio Input	3.5 mm audio interface × 1
Local Storage	2Gb Nandflash
General	
Operating Temperature	-30~+60°C
Operating Humidity	5%~85%
Protection Level	IP66
Power Consumption	15W
Power Supply	POE or DC12V~24V
Installation	Wall Mounted
Material	ABS
Dimensions	240 x 220 x 165mm (9.45"× 8.66"×6.50")



Gross Weight	Approx.1.5kg
Languages	English
Warranty	2 years