

Datasheet

ISO25 - Printable ISO Card

Product Description

The ISO25 is a thin, printable PVC card. It contains a 125 kHz RFID chip. This affordable RFID proximity solution is ideal for any standard access control project.

CDVI offers a variety of access control credentials with different technologies (125 kHz proximity or MIFARE®) You'll find the ideal credentials to meet the needs of your installation. You can also customize our CDVI cards and tags with your own company logo (minimum order of 1,000 units).



Key Features

- Compatible with CDVI Wiegand readers
- 125 kHz proximity card
- Pack of 25 cards
- Printable on both sides
- Sequential decimal number on each card

 Certification


 DEEE

 Certification

All the information contained within this document (pictures, drawings, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. Published: 22 June 2023. CDVI_ISO25_DS_01_EN_LETTER_C

Product Specifications

Material:	PVC
Technology:	CDVI 26-bit encoding
Frequency:	125 kHz
Security level:	Standard
Weight:	0.1 oz, 4 g

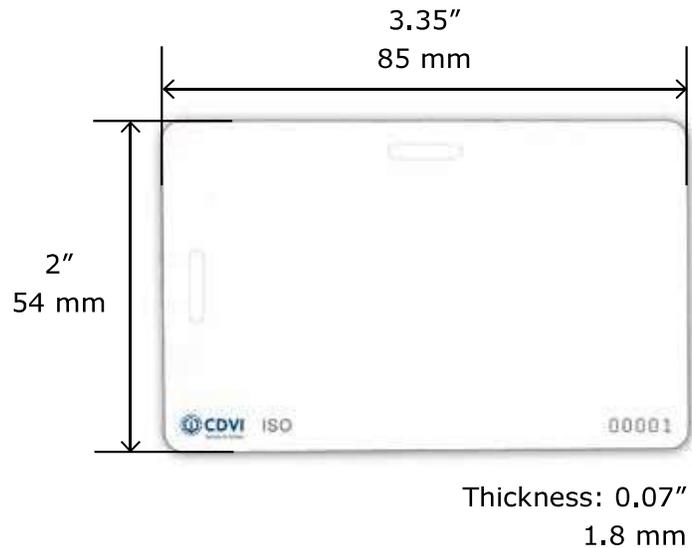

Also available in these technologies



ISOH25

HID 26-bit 125 kHz



ISOM25

MIFARE® Classic 1K 13.56 MHz



ISODT25

Dual-Tech
CDVI 125 kHz & DESFire® EV2