

Analog Camera

KPC-C700NU

- 1/3.2" 1.3M SONY STARVIS CMOS
- Horizontal 850TV Lines
- CVBS(1.0Vp-p Composite 75Ω)
- Fixed lens 3.6mm
- WDR, 2DNR
- Digital D&N
- Mini Square Camera




Optional

KPC-C700NUB	2.97mm board lens
	3.6mm board lens
	6mm board lens
	8mm board lens
	12mm board lens
KPC-C700NUP1	3.7mm conical pinhole
KPC-C700NUP3	3.7mm flat pinhole
KPC-C700NUP4	4.3mm supercone pinhole

Analog Camera

KPC-C700NU

Dimensions

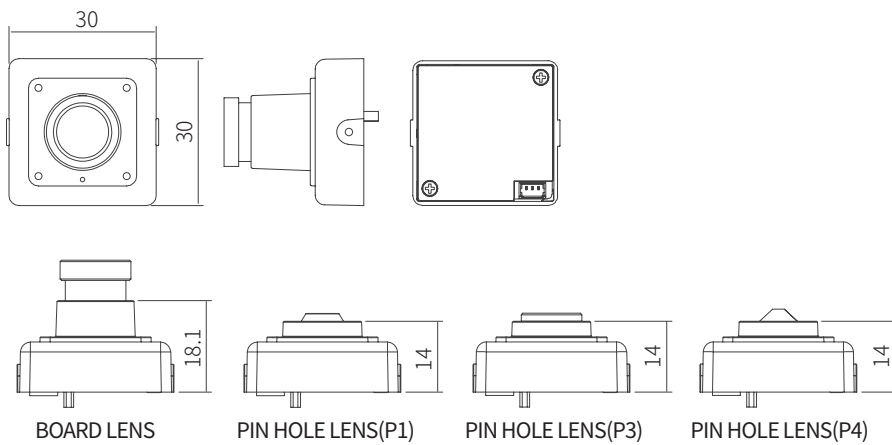

Specifications

Image Sensor		1/3.2" Exmor RS Progressive Scan SONY STARVIS CMOS	Privacy Mask		-	
Effective Pixels		1.27MP 1297(H) x 977(V)	Image Rotation		OFF, H-FLIP, V-FLIP, HV-FLIP	
Max. Video Resolution		Horizontal 850TV Lines	Defog		OFF, AUTO	
Type		Board mount lens	Sharpness		0-255	
Lens	Focal Length	3.6mm, F 2.0	OSD control		JOYSTICK	
	Angle of View	94.91 (D)x81.9 (H)x66.5 (V)	Language		-	
Min.Illumination		0.2 Lux (30IRE, F2.0, AGC MAX)	Video Output mode		CVBS(1.0Vp-p Composite 75Ω) NTSC/PAL	
Gamma		γ=0.45	General			
IR LEDs		-	IP Rating			-
IR Range		-	Operating Temperature			-10°C~+50°C(Humidity less than 80%)
White Balance		ATW / PUSH / USER1 / USER2 / MANUAL / PUSH LOCK	Storage Temperature			-20°C~+60°C(Humidity less than 80%)
Dynamic Range	WDR/BLC	WDR / ATR / OFF	Dimension(mm)			30X30mm
	D-WDR	OFF / HLC / BLC	Weight			Approx.27.7g
	Level	138.1dB	Power Source			12VDC(± 10%)
Electronic Shutter Speed		AUTO or 1/60(50)~1/100,000	Power Consumption			12VDC(± 10%), 60mA max.
Digital Slow Shutter(DSS)		-				
Auto Gain Control(AGC)		MIN, 6, 12, 18, 24, 30, 36, 42, 48, MAX				
Day&Night		Electronic D&N				
Noise Deduction		2D-DNR (Y/C, Y, C, OFF)				
Motion Detection		-				