

LED FHD Monitor

MW3222-L-DT



Key Features



- True color display
- Resolution is up to at 1920*1080
- Wide viewing angle:178°(H)/ 178°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language
- Built-in 3D COMB filter and 3D Noise Reduction
- 5ms response time for no motion blur, judder or ghosting
- High fidelity digital processing for a brilliant and vivid video
- Professional thermal design to extend equipment lifespan

Specifications


Model	MW3222-L-DT
Display	
Display Type	LED Backlight
Screen Size	21.5"
Aspect Ratio	16:9
Pixel Pitch(mm)	0.24825*0.24825
Max Resolution	1920*1080
Brightness(cd/m ²)	250
Contrast	3000:1
Response Time(ms)	7
Color	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Refresh Rate	60Hz
Interface	
Input	1*VGA、1*HDMI
OSD	
Multi- Language	8 (English、France、Spanish、German、Russia、Korea、Japanese、Simplified Chinese)
Mounting	
VESA(mm)	100*100
Wall-mounted Thread	4-M4 Threaded hole
General	
Power supply	DC 12V, 2A
Consumption(W)	≤24(on) ≤0.5(Standby)
Operation Temperature	0°C ~ 40 °C
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~50°C
Storage Humidity	10%~90% (No Condensation)
Dimension(W*H*D)(mm)	508.02*392.87*200.00 (With Pedestal)
Package(W*H*D)(mm)	566*382*166
Weight(Kg)	Net Weight:2.3 Gross Weight:3.4
Accessory	
Standard	HDMI Cable、Adapter、Pedestal、Quick Guide
Optional	Hanging bracket(Model: HB-4022-E)

Appearance

Dimensions

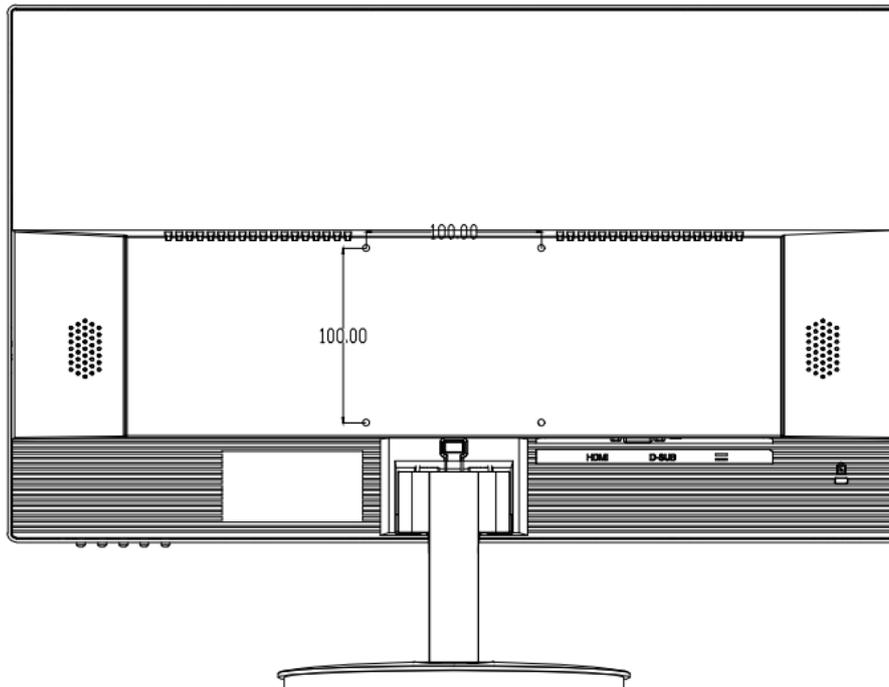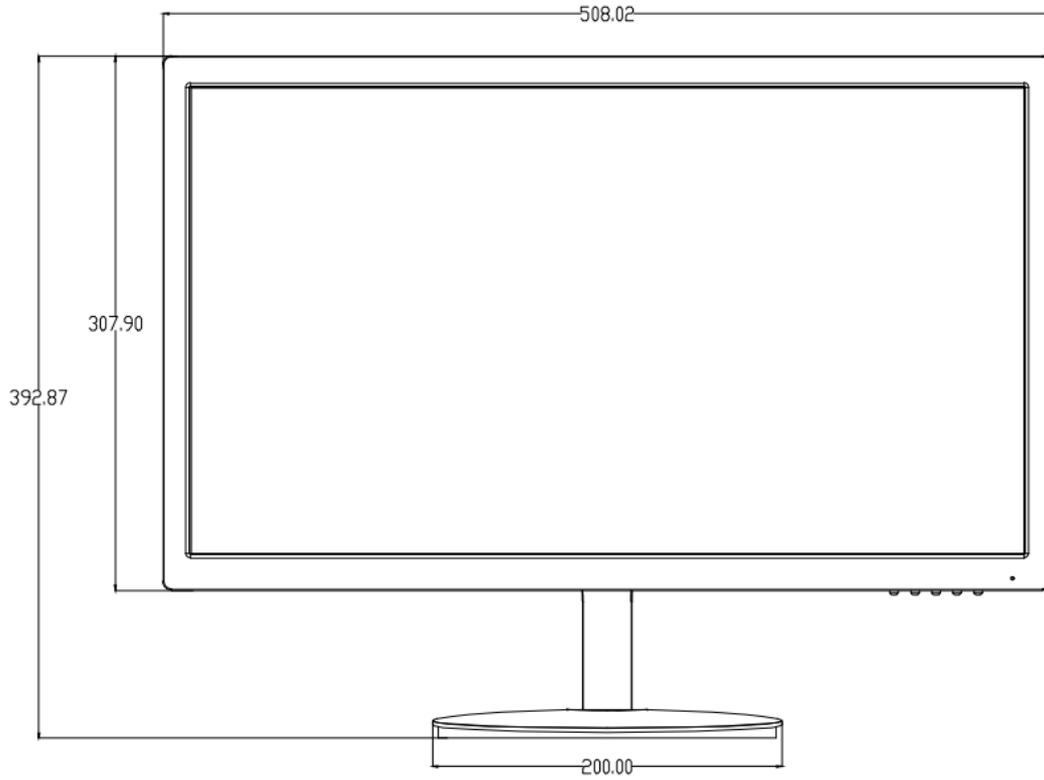

Interfaces

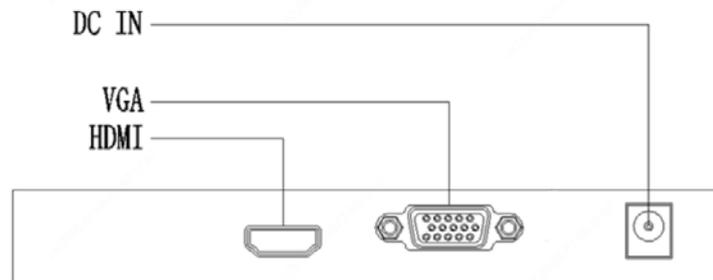

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.