

24 Inches LED Monitor MW3224-V2



Features


- Wide viewing angle:178°(H)/ 178°(V)
- No color shift from any view angle
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Screen can reduce blue light, protect eyes
- Without ripple, use smooth dimming with DC to eliminate screen flicker
- Three sides super slim design, min width can be 3.1mm
- High light transmittance, uniform brightness, rich color, wide color gamut

Specifications


Model	MW3224-V2
Panel	
Backlight	ELED
Panel Size	24"
Resolution	1920 × 1080
Color Support	16.7 M
Brightness (cd/m ²)	250
Contrast Ratio	1300: 1
Response Time (ms)	5
Pixel Pitch (H × V) (mm)	0.27 x 0.27
Viewing Angle (H/V)	Horizontal 178°, Vertical 178°

Display Size (mm)	527.04 x 296.46
Refresh Rate	100 Hz
Operation Hour	24/7
Bezel Width	3.1mm (top/left/right), 15.8mm (bottom)
Color Gamut	72% NTSC
Surface Treatment	Haze 25%, 3H
LCD Technology/Panel Type	IPS
Interface	
Video Input	1 x VGA, 1 x HDMI
Audio Input	1 x 3.5mm Mini-Jack
Speaker	
Speaker	2 x 2 W
VESA	
VESA (mm)	75 x 75
Wall-mounted Thread	4-M4 Threaded Hole, Depth 10mm
OSD	
Multi-Language	English (default), Czech, French, German, Chinese, Italian, Polish, Dutch, Russian, Japanese, Korean, Arabic, Spanish
General	
Input Voltage	DC 12 V, 2 A
Typical Power Consumption (W)	17
Standby Power Consumption (W)	≤0.5 (Standby)
Product Dimensions (W × H × D) (mm)	539.2 x 398.5 x 189.3 (With Pedestal)
Package Dimensions (W × H × D) (mm)	612 x 405 x 101
Weight (kg)	Net Weight: 2.79 Gross Weight: 4
Operating Temperature	0°C ~ 40°C
Operating Humidity	10% ~ 90% (No Condensation)
Storage Temperature	-10°C ~ 60°C
Storage Humidity	10% ~ 90% (No Condensation)
Material	Plastic
Lifetime (h)	30000
Certifications	CE/FCC
Standard	1 × 1.5m HDMI cable, 1 × Adapter, 1 × Pedestal, 1 × Quick Guide
MTBF (h)	50000h

Dimensions

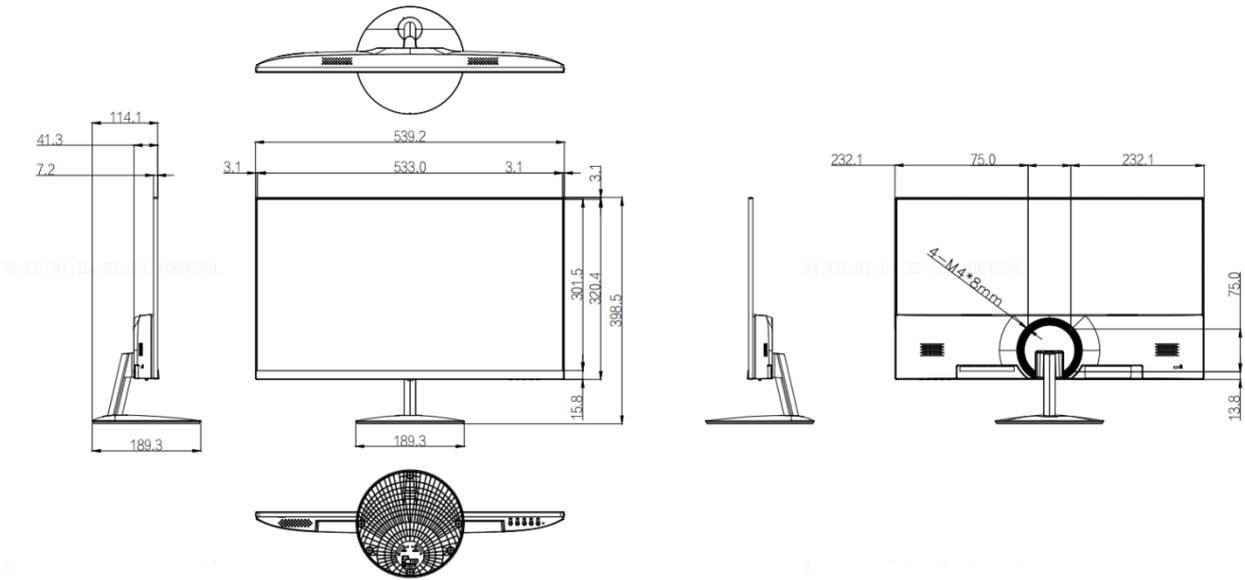

Interface

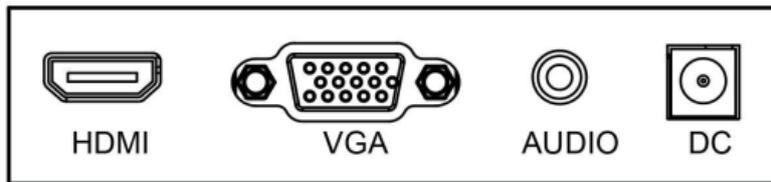

Ordering Info

Product Model	Description
MW3224-V2	24 Inches LED Monitor

Zhejiang Uniview Technologies Co., Ltd.

- <http://www.uniview.com>
- overseasbusiness@uniview.com; globalsupport@uniview.com
- No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China



©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
 *Product specifications and availability are subject to change without notice.
 *Despite our best efforts, technical or typographical errors may exist in this document.
 Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.