











HDMI Digital Input



USB B-Type Touch



Backlight Unit



3-Year Warranty

# **022AD-CV-45P0**

# 22-Inch REAR MOUNT PCAP Touch Monitor















# INPUT INTERFACE




#### Multi Inputs

Open frame monitor supports both digital and analog inputs to use as normal office desktop monitor with VGA, HDMI, DVI input and USB-Type B to use touch function as well.

### **DIMENSION**



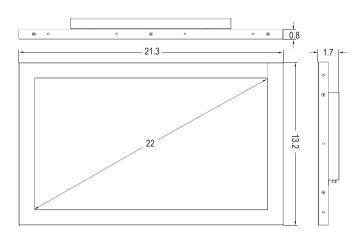

# **FEATURES**

- 22-Inch Screen Size
- -1920 x 1080 FHD Resolution
- Excellent Optical Performance
- 10-Points Projective Capacitive PCAP Touch Technology
- Video Signal: VGA (15 Pin D-Sub) / DVI / HDMI
- Zero Pressure Touch Activation
- LED Backlight Units
- 3-Year Warranty

# **SPECIFICATIONS**

DICDI AV	O22AD-CV-45P0
DISPLAY	
Screen Size Resolution	21.5 ln
	1920 x 1080 LED
Backlight Aspect Ratio	16 : 9
Viewing Angle	178° / 178°
Response Time	18ms
Brightness	250cd/m²
Contrast Ratio	3000 : 1
Color Depth	16.7 M
Display Area (mm)	476.64 x 268.11mm
INTERFACE	170.01 A 200.1111111
HDMI	1
DVI	1
VGA (15 Pin D-Sub)	<u>.</u> 1
Audio	1
USB (B-Type)	1
TOUCH TECHNOLOGY	
Material	2 mm Glass
Points / Type	10 Max / Projected Capacitive (PCAP)
Accuracy	2 mm
CABINET	
Material	Metal
Color	Black
POWER	Didok
Consumption	22W
Electrical Ratings	12VDC ± 5% (Adapter Input AC 100V ~ 240V, 50/60Hz)
TEMPERATURE	
Operating	32° F ~ 104° F (0° C ~ 40° C)
Storage	-4° F ~ 140° F (-20° C ~ 60° C)
HUMIDITY	4 1 140 1 (20 0 00 0)
Operating	20% ~ 80%
Storage	10% ~ 90%
DIMENSIONS (WXHXD)	10/0 30/0
Inch (in)	21.3 x 13.2 x 1.7
Millimeter (mm)	542.5 x 334.5 x 43.7
WEIGHT	042.0 X 004.0 X 40.1
Net Weight	13.2lbs (6.0kg)
COMPLIANT	13.2IDS (0.0Kg)
	CE / FCC
Certification	CE / FCC
VESA™	100 100
Mount Size (mm)	100 x 100