


2MP Intensifier IP® Angle Mount IP Camera

O2i695 2.9mm fixed lens

Features

- See color in low light without IR LEDs
- Supports up to 1080p @ 30fps
- Built-in standard PoE (IEEE 802.3af)
- No problems caused by objects that reflect or absorb IR light sources
- With presets for different scenarios
- Attached cable (8 ft.) connects camera unit to main unit for flexible placement
- 2-way audio communication
- Sensor input and relay output
- Micro SD card slot (card not included)
- Conformant with ONVIF Profile S
- 5 year warranty*

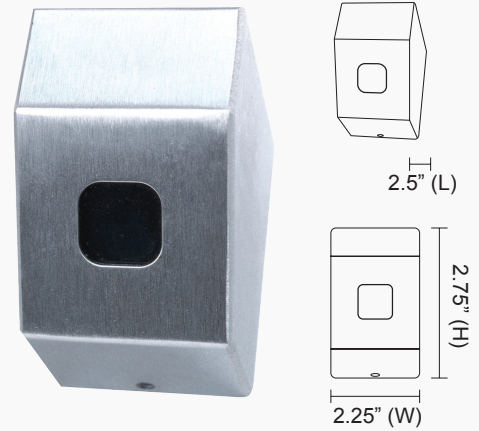

Camera Specifications

Image SensorProgressive scan 1/2.8" CMOS, 2MP
 Maximum Resolution1920 x 1080
 Minimum Illumination.....F1.4, Color: 0.2 lux (Max Intensify)
 White BalanceATW/AWB
 CompensationWDR
 IntensifySelectable (max 8x) / Off
 Electronic Shutter Speed.....1/30 - 1/10000 sec
 DNR.....2D/3D

Video Specifications

Main Resolution.....1920x1080 / 1280x720 @ 30fps
 CompressionH.264 (HP/MP/BP), MJPEG
 Bitrate Control.....VBR, CBR
 Multiple Streaming.....3 streams

Audio Specifications

Mono Input.....G.711
 Mono Output.....G.711

External Terminal Specifications

Ethernet.....10/100 Mbps
 Alarm1 sensor input, 1 relay output
 (terminal block)
 Audio1 mic in, 1 line out (terminal block)
 PowerTerminal block

Network Specifications

Protocols.....IPv4, TCP, UDP, RTP, RTSP, HTTP,
 HTTPS, SMTP, FTP, DHCP, UPnP, DNS
 DDNS supportSpeco DDNS (free of charge)

Network Specifications (continued)

Security..... User ID & Password protection, IP address filtering,
 digest authentication
 User Access..... Max. 8 simultaneous users. Actual number of
 users may vary depending on bandwidth

System Specifications

PoE..... Standard (IEEE 802.3af)
 Analytics Motion detection, tampering, sensor input
 Alarm Triggers Analytics
 Alarm Events FTP upload, email upload, micro SD card
 recording, relay output
 Image Settings..... Privacy mask

Client Specifications

Web Browser Support Windows (Internet Explorer 8 and up)
 PC Application SecureGuard® VMS
 Mobile SecureGuard® Mobile (iPhone® and Android™)

Operating & Unit Specifications

Power Supply PoE, 12VDC (power supply not included)
 Power Consumption 4W
 Operating Temperature..... 14° F – 122° F
 Operating Humidity 0% - 90% RH
 Main Unit Dimensions..... 2.59" (W) x 1.24" (H) x 4.21" (D)
 Main Unit Weight 5 oz
 Camera Unit Dimensions..... 2.25" (W) x 2.75" (H) x 2.5" (D)
 Camera Unit Weight 7 oz.
 Certifications..... FCC, RoHS

NDAA
 COMPLIANT

*Products are in compliance with NDAA Section 889 Part B Guidelines

Optional Accessories



POEINJ
 12.95W
 PoE Injector



PSW5
 12VDC
 Power Supply

*Effective on all new purchases as of 2/1/17. Visit www.specotech.com for latest ONVIF support. ONVIF is a trademark of Onvif, Inc. Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Android, Google Play and the Google Play logo are trademarks of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 2/24/22

