



8MP IP Bullet Camera with Line Crossing and Intrusion Detection with Junction Box, NDAA Compliant

O8VB3M

2.8-12mm motorized lens, white housing



Features

- Captures up to 8MP @ 20fps
- Built-in standard PoE (IEEE 802.3af)
- True Day/Night operation (IR cut filter)
- IR range: up to 165' (depending on scene reflection)
- True WDR
- Micro SD card slot up to 256GB (card not included)
- Conformant with ONVIF Profile G/S/T
- Line crossing, region intrusion and scene change detection*
- IP67 Weather Resistance
- Junction Box Included
- 5 year warranty



Camera Specifications

| | |
|--------------------------|--|
| Image Sensor | Progressive scan 1/2.8" CMOS, 8MP |
| Maximum Resolution | 3840 x 2160 (8MP) |
| Minimum Illumination | 0.02 lux @ F1.6, AGC ON; 0 lux with IR |
| Field of View | 99° ~ 34° (H); 53° ~ 18° (V); 115° ~ 36°(D) |
| Image Settings | Region of interest, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Defog, Sharpen, Noise Reduction, Corridor mode |
| Day/Night | Smart IR |
| Compensation | True WDR / BLC / HLC |
| Electronic Shutter Speed | 1 ~ 1/100000 sec. |
| DNR | 3D DNR |
| Angle Adjustment | Pan 0° - 360°, Tilt 0° - 90°, Rotation 0° - 360° |

Video Specifications

| | |
|------------------------|---|
| Main Stream Resolution | 8MP/(1~20fps), 6MP/5MP/4M/2K/3MP/2MP/720p (1~30fps) |
| Sub Stream Resolution | 720P(1~12fps)/D1/480 x 240(1~30fps) |
| Third Stream | D1/CIF/480x240 (1~30fps) |
| Compression | H.265, H.264 |
| Bitrate Control | VBR, CBR (64Kbps ~ 12Mbps) |
| Multiple Streaming | 3 streams |

Network Specifications

| | |
|--------------|--|
| Protocols | UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS |
| DDNS support | Speco DDNS (free of charge) |
| Security | User ID & Password protection, IP/Mac address filtering, digest authentication |
| User Access | Max. 3 simultaneous users (Actual number of users may vary depending on bandwidth) |

Interfaces

| | |
|------------------|-------------------------------------|
| Network | RJ45 jack |
| Power | DC jack |
| Microphone Input | 3.5mm |
| Card Slot | MicroSD, up to 256GB (not included) |
| Alarm | No |
| Reset | Yes |

Audio Specifications

| | |
|-------------------|-----------------|
| Audio Compression | G.711A / G.711U |
|-------------------|-----------------|

Client Specifications

| | |
|---------------------|---|
| Web Browser Support | Chrome, Edge, Safari, Firefox, Windows (Internet Explorer 8 and up) |
| PC Application | SecureGuard® VMS, SecureGuard® CMS |
| Mobile | SecureGuard® App, Speco Blue (iPhone® and Android™) |

System Specifications

| | |
|-------------------|--|
| PoE | Standard (IEEE 802.3af) |
| Analytics | Line crossing, region intrusion and scene change detection |
| Alarm Triggers | Motion, Analytics, SD card error |
| Security Settings | Watermark, IP address filtering, video mask, password protection |


Operating & Unit Specifications

| | |
|-----------------------|--|
| Power | PoE, 12VDC (power supply not included) |
| Power Consumption | <10.0W |
| Operating Temperature | -40°F ~ 140°F (-40°C ~ 60°C) |
| Operating Humidity | Less than 95 % (non-condensing) |
| Unit Dimensions | 8.57" (L) x 3.16" (W) x 3.15" (H); 217.8 x 80.5 x 80.3 |
| Unit Weight | 1.45 lb (0.62kg) |
| Certifications | FCC |


*Products are in compliance with NDAAs Section 889 Part B Guidelines



Optional Accessories

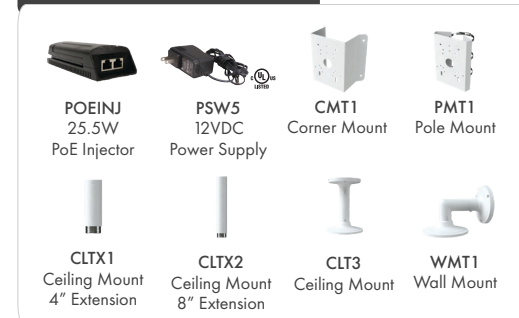

Cameras Interfaces



ONVIF is a trademark of Onvif, Inc. Chrome and Firefox use Java which requires an initial internet connection. Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Android, Google Play and the Google Play logo are trademarks of Google Inc. Speco Technologies is constantly developing and improving products. We reserve the right to modify product design and specifications without notice and without incurring any obligation. Spec Rev. 8/29/23

Apps available from the following:



800-645-5516 • Fax: 631-957-9142 or 631-957-3880 • specotech.com

