



PAR-ALLTXIRA28


2 Megapixel TVI/AHD/CVI/Analog 960h, Outdoor Turret,
Up to 98' IR Range, D-WDR, 12VDC, Audio Over Coax (AOC)

Features

- 2 Megapixel Resolution
- Built-in Mic: Audio Over Coax**
- All-in-One Technology (TVI/AHD/CVI/Analog 960h)
- Fixed Lens
- True Day/Night with IR Range up to 98'
- D-WDR
- IP67 Weatherproof
- 2D/3D DNR (Digital Noise Reduction)
- 12VDC Operation
- Up The Cable (UTC) Function
- Through InVid Tech DVR: Free App, CMS & MAC Client

** With use of Paramont (Version 1.3.8 and above)/ Vision DVRs. TVI Only.

Camera	
Image Sensor	1 / 2.8" CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto
White Light Distance	98' (20 ~30 m)
Frame Rate	30fps (60Hz); 25fps (50Hz)
Min. Illumination	0.005lux@ F1.2, AGC ON; 0 lux IR
Lens	2.8mm
Lens Mount	M12
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 67
Audio	
Audio	Built-in Mic, Audio Over Coax (AoC)
Camera audio	TVI Support
Audio Sensitivity	-36db
Functions	
Function Control	OSD (COC Control)
Smart IR	Yes
Day & Night	ICR
Digital WDR	Yes
Digital DNR	Yes, 2D DNR
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Front Light Compensation	No
Defog	No
HLC	Yes
Sharpness	Yes
Mirror	No
Image Setting	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0° ~ 360°; Tilt: 0° ~ 75°; Rotation: 0° ~ 360°
Others	
Power Supply	DC12V (± 15%)
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	-22°F ~ 122°F (- 30°C ~ 50°C), 10 % ~ 90 % (relative humidity)
Dimensions	Φ 3.7 x 3.3 in (Φ 94.6 x 82.8mm)
Weight (net)	Approx. .86 lb (0.39KG)

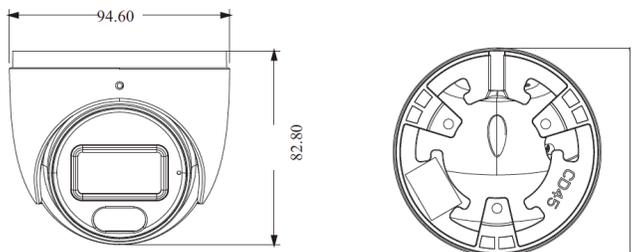

Ordering Information

PAR-ALLTXIRA28L: 2 Megapixel Turret, 2.8mm