




****PoE Injector is not Included.**

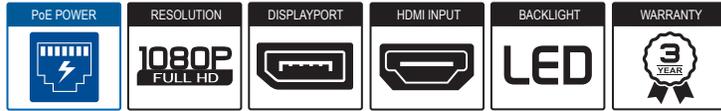


PoE32BD-AS-4000

PoE is a technology that lets network cables carry electrical power and delivery is intelligent, and designed to protect network equipment from overload, underpowering. GVision's Full HD 32" PoE monitors are design for run 24 / 7 / 365 operating.

DIMENSION

Unit: Inch

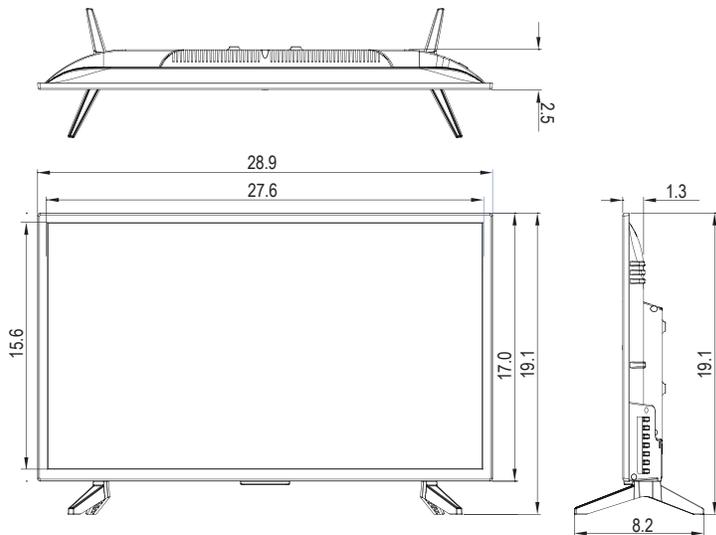

FEATURES

- 32-Inch Screen Size / 1920 x 1080 Full HD Resolution
- Ethernet 10/100 **RJ45 PoE** Port Input Interface
- Video Signals: **HDMI / Display Port (DP)**
- **300 nit** High Brightness
- Built-In **Two 3W Speakers** (Left / Right)
- **Direct LED** Backlight Unit
- **178° / 178°** Wide Viewing Angle
- **24 / 7** Operation Design / **3-Year** Warranty

SPECIFICATIONS

1080P
FULL HD

DISPLAY		PoE32BD-AS-4000
Screen Size		32 In
Resolution		1920 x 1080
Backlight		Direct LED
Aspect Ratio		16 : 9
Viewing Angle		178° / 178°
Response Time		6.5ms (G2G)
Brightness		300cd/m ²
Contrast Ratio		3000 : 1
Color Depth		16.7M
INTERFACE		
RJ45		1
HDMI		2
DisplayPort		1
Audio		1
AUDIO		
Speaker		3W x 2
CABINET		
Material		Plastic
Color		Black
POWER		
Input Voltage		PoE 60W
Electrical Rating		40W
INJECTOR TYPE		
Type		Type 3 PoE++ standard
Power Available at PD		51W
Max. Power Delivered by PSE		60W
Voltage Range (at PSE)		50.0-57.0 V
Voltage Range (at PD)		42.5-57.0 V
Max. Current		600 mA per pair
Max. Cable Resistance Per Pairset		12.5 ohm
FEATURES		
Remote Control		Yes (Battery is not included)
Language		Multi Languages
TEMPERATURE		
Operating		32° F ~ 122° F (0° C ~ 50° C)
Storage		-4° F ~ 140° F (-20° C ~ 60° C)
DIMENSIONS (WxHxD)		
Inch (in) w/o Stand		28.9 x 19.1 x 8.2
Millimeter (mm) w/o Stand		735.1 x 487.2 x 209.7
WEIGHT		
Net Weight		24 lbs (10.88 kg)
VESA™		
Mount Size (mm)		100 x 100

****injector is not included.**

Specifications subject to change without any notice