


PVM32 MONITOR

32" IP PVM (Public View Monitor) is supporting a 1080p IP camera with a STARVIS SONY CMOS sensor. It is designed to run 24 / 7 operations. Our IP PVM simultaneously loops out the camera via Ip and CVBS and detected motion to warn beep sound even when the image is lost by the sensor.

DIMENSIONS

Unit: Inch

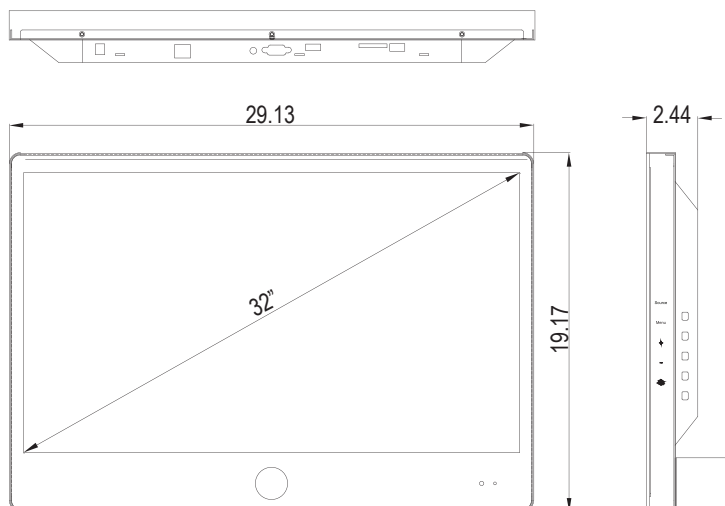

FEATURES

- 32-Inch Screen Size / 1920 x 1080 Resolution
- 1080P IP Camera / True WDR IP Cam 120dB
- Face Detect & Smart Tracking Box / Mask Detection
- Interface: BNC Out / HDMI / VGA / SD Slot / USB / RJ45 Out
- People Count Function (Count Number of People Get In & Out)
- Video Output: RJ45 / CVBS / HDMI
- 3-Year Warranty

SPECIFICATIONS

DISPLAY	PVM32
Screen Size	32 In
Resolution	1920 x 1080
Backlight	LED
Aspect Ratio	16 : 9
Viewing Angle	178° / 178°
Response Time	5ms
Brightness	350cd/m ²
Contrast Ratio	1000 : 1
Color Depth	16.7M

INTERFACE	
CVBS Cam Out	1
HDMI	1
VGA	1
SD Slot	1
RJ45 Out	1
USB	1

FEATURES	
People Count	Yes
Mask & Face Detection	Yes
Multi Language	Yes

IP CAMERA	
Sensor	1/2.8" STARVIS Sony Sensor
Resolution	1920x1080@25fps
Video Output	RJ45, CVBS, HDMI
WDR	120dB
Minimum Illumination	0.1 Lux (Color) (0.01Lux B/W)
Compression	H.264, H.265
Compliance	Onvif Profile S/Q/G/T
Lens	3.3-12mm Vari-focal IR Corrected
Recording	Local Micro SD, Remote FTP
Network Protocol	Onvif , IPv4,802.1x,HTTP, HTTPS, TCP/IP, UDP/IP, RTSP, DHCP, NTP, RTCP/RTP, PPPoE, SMTP, DNS, UPnP, FTP, ARP, SNMP Smart tracking box

SD & USB MEDIA PLAYER	
Supporting Format	AVI,MOV,MP4,3GP,MPG,VOB,DAT,WMV,ASF,JPEG,BMP,MP3,WMA
Max. Resolution	1920X1080@30fps
Max. Support Volume	64GB NTFS/FAT32
Max. Stream	15Mbit/s

POWER	
Consumption	< 45W
Electrical Rating	AC110V~240V

TEMPERATURE	
Operating	32° F ~ 122° F (0° C ~ 50° C)

DIMENSIONS (W×H×D)	
Inch / Millimeter	29.13 x 19.17 x 2.44 / 740 x 487 x 62

WEIGHT	
Net Weight	35.49 lbs (16.1 kg)

VESA™	
Mount Size (mm)	100 x 100

COMPLIANT	
Certifications	FCC / CE / RoHS

Specifications subject to change without any notice