

# 24-port Managed PoE Gigabit Ethernet Switch

Layer 2 PoE, PoE+, Hi-PoE, and PoE++ Switch



**PoE 2.4**

- Layer 2 Network Management PoE Ethernet Switch
- Security Device Discovery Identifies all IP Devices Connected to the Same Network
- Intelligent PoE for Power Consumption Management
- Long-distance PoE Transmission Distance, up to 250.0 m (820.21 ft)
- PoE Watchdog Function Monitors Network
- High-capacity Data Cache (4-megabit) for Real-time Transmission with smooth video
- Supports IEEE802.3af, IEEE802.3at, Hi-PoE, and IEEE802.3bt Standards
- New Limited Lifetime Warranty<sup>1</sup>

## Product Overview

The 24-port managed desktop gigabit switch is designed for field transmission applications and for high-definition video. The switch is equipped with a high-performance switching engine, a large buffer, low transmission delay, and high reliability. In addition to the 24 PoE ports, the switch offers two (2) gigabit uplink combo ports with a PoE budget of 360 W. The switch also delivers powerful network management functions including CLI, iLinksView, and Web and network management software based on SNMP.

The switch is housed in a sealed, metal case that offers low power consumption.

## Functions

### Security Device Discovery

The Security Device Discovery function automatically discovers ONVIF devices, regardless of manufacturer, connected to the same network as the switch. The function displays the IP Address, MAC Address, Model Number (for Dahua products), Port Number, VLAN Number, and PoE consumption in one easy-to-read dashboard. Security Device Discovery, provides a single interface where you can quickly identify the port of a faulty device to take quick action and reduce down-time.

### Intelligent PoE

The switch features Intelligent PoE power consumption management to help keep the power and the data flowing, even when the switch experiences a power fault. Intelligent PoE monitors the power consumption of the connected devices, and in the event of large power fluctuations the switch shuts down one port at a time rather than shutting down all ports. Unlike typical switches that shut down all ports at once, this switch shuts down the highest number port first, then the next highest number until the switch detects the power consumption is below the PoE budget. For example, if the switch has eight PoE ports and each port is connected to a network camera, the switch disables port number 8 first, then subsequent ports until the power budget is below the threshold wattage.

### PoE Watchdog

The switch automatically monitors each port for an active connection with the associated camera. If the switch detects a camera failure it powers off then restarts the PoE connection to restart the camera.

### PoE++

The switch supports IEEE 802.3bt technology that delivers 90 W via a PoE port and drives high-power infrastructure for smart building systems, safe cities, thin clients, and many more applications. With this standard, the switch can power IT and IoT devices that demand increased power consumption resulting in lower installation and wiring costs.

### Long-distance PoE Transmission

The switch extends PoE transmission distance to 250.0 m (820.21 ft), a significant improvement over typical switches.

### Environmental

The switch is designed to operate in severe environments and in temperatures ranging from  $-10^{\circ}\text{C}$  to  $+55^{\circ}\text{C}$  ( $14^{\circ}\text{F}$  to  $131^{\circ}\text{F}$ ). The switch includes a professional-grade surge protection circuit that offers 4 kV (common mode) and 2 kV (differential mode) all-port surge protection. This protection reduces damage to the network from a lightning storm. The switch meets the Class B EMC standard and is suitable for residential, commercial, and light-industrial applications.

**Technical Specification**

Ethernet Ports	Ports 1 through 24: 10/100/1000, RJ45 Ports 25 and 26: 10/100/1000 (uplink), RJ45 Ports 25 and 26: SFP 1000 Mbps (uplink combo)
PoE Power Consumption	Ports 1 and 2: ≤ 90 W (IEEE802.3bt) Ports 3 through 24: ≤ 30 W (IEEE802.3at) Total Power Consumption: ≤ 360 W
PoE Protocol	PoE (IEEE802.3af), PoE+ (IEEE802.3at), Hi-PoE, PoE++ (IEEE802.3bt)
PoE PIN Assignment	1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-);
PoE Management	Power consumption management Power on and power off Power down for overload Green PoE Legacy support
PoE Transmission Distance <sup>2</sup>	250.0 m (820.21 ft)
Switching Capacity	52 Gbps
Packet Forwarding Rate	26.784 Mpps
Packet Buffer Memory	4 Mbs
MAC Table Size	8K
VLAN Amount	4K
Standards Compliance	IEEE802.3; IEEE802.3u; IEEE802.3x; IEEE802.3ab; IEEE802.3z
Power Input	100 VAC to 240 VAC
Power Consumption	Idle: 20 W PoE Full Load: 360 W
Operating Temperature	-10° C to 55° C (14° F to 131° F)
Operating Humidity	10% to 90%, Relative
Electrostatic Discharge	Air Discharge: 8 kV Contact Discharge: 6 kV
Surge Protection	Common Mode: 4 kV Differential Mode: 2 kV Class B Electromagnetic Compatibility Standard
Dimensions (L x W x H)	
Product	440.0 mm x 300.0 mm x 44.0 mm (17.32 in. x 11.81 in. x 1.73 in.)
Packaging	527.0 mm x 412.0 mm x 110.0 mm (20.75 in. x 16.22 in. x 4.33 in.)
Weight	4.62 kg (10.19 lb)

**Certifications**

Safety	EN 62368-1:2014 + A11:2017
Electromagnetic Compatibility (EMC)	CFR 47 FCC Part 15 subpart B EN55032:2015, EN61000-3-2:2014, EN61000-3-3:2013, EN55024:2010+A1:2015, EN55035:2017, EN50130-4:2011+A1:2014


**Service Specification**

MAC Table	MAC Address Table Configuration
Spanning Tree	STP, RTSP, MSTP
VLAN	IEEE802.1Q Standard VLAN
Flow Control	Supports IEEE 802.3x (full duplex flow control) and back pressure flow control (half duplex)
Link Aggregation	Manual, LCP
Port Mirroring	Many-to-One Port Mirroring
Multicast	IGMP Snooping v1/v2/v3
DHCP	DHCP Client/Server, DHCP Snooping
Security Features	<ul style="list-style-type: none"> <li>User Management</li> <li>SSH</li> <li>HTTPS</li> <li>SNMP V1/V2/V3</li> <li>ACL</li> <li>802.1x</li> <li>Loop Protection</li> </ul>
Quality of Service	<ul style="list-style-type: none"> <li>Eight (8) output queues per port</li> <li>Traffic shaping, port tag remarking</li> <li>QoS based on CoS/DPL/PCP</li> <li>QoS based on DSCP</li> </ul>
System Maintenance	<ul style="list-style-type: none"> <li>Upload/Download configuration files</li> <li>Online upgrade</li> <li>System logs</li> </ul>
Device Management	<ul style="list-style-type: none"> <li>Web (HTTP and HTTPS protocols)</li> <li>iLinksView</li> <li>CLI</li> <li>SNMP V1/V2C/V3</li> </ul>

**Ordering Information**

Type	Part Number	Description
PoE Switch	DH-PFS4226-24GT2GF-360	Layer 2 24-port Managed Gigabit PoE Switch
Accessories, optional	PFT3950	1.25 GB, 850 nm, 500 m, LC, Multi-mode
	PFT3960	1.25 GB, 1310/1550 nm, 20 km, LC, Single Mode
	PFT3970	1.25 GB, 1550/1310 nm, 20 km, LC, Single Mode

**Dimensions**

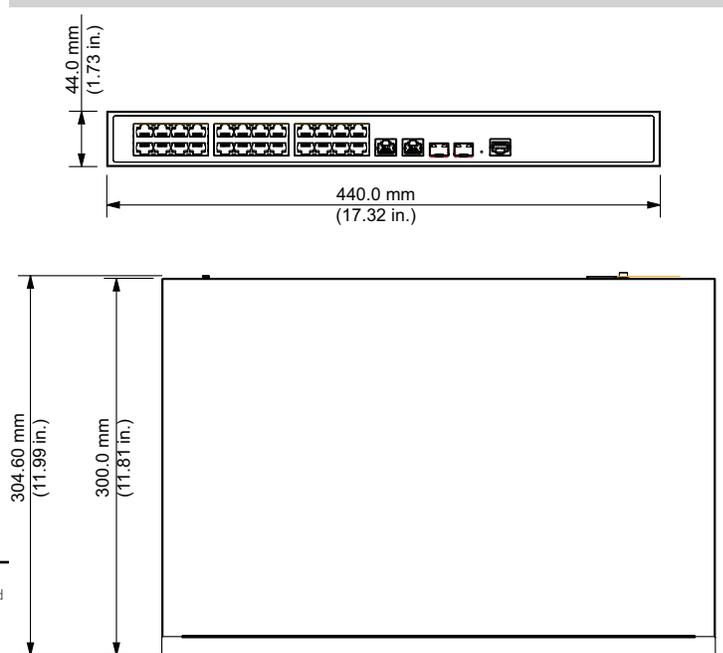

1. New switch warranty period is extended to two years after end of sale date.  
2. Enabling 100 m (328.08 ft) to 250 m (820.21 ft) transmission distance will lower the transmission data speed from 1 Gbps to 10 Mbps.