

SX-3C4K85

OREI SplitXtend Docking Hub with USB-C input, USB-A, Ethernet, DP, Power delivery upto 85 Watt and up to 3 Extended Displays



DIMENSIONS & WEIGHT:

Length: 207.32mm/8.16in **Width:** 57.98mm/2.28in
Height: 19.6mm/0.77in **Weight:** 250g/8.8oz

The OREI SplitXtend **SX-3C4K85** USB-C Docking Hub is a versatile connectivity solution for enhanced productivity. With two HDMI ports, a DisplayPort, USB-C, and four USB-A ports, it seamlessly integrates multiple devices. It supports Power Delivery (PD) up to 100W, including 85W for upstream charging. Extend your workspace across three displays with HDMI and DisplayPort options. The RJ45 Gigabit Ethernet port provides high-speed network connectivity. Enjoy data transfer rates up to 5Gbps, backward compatible with USB 2.0. MicroSD and SD Card Readers support SDHC/SDXC (up to 2TB), offering expanded storage for your files.

PACKAGE CONTENTS: 1x SX-3C4K85 , User Manual

KEY FEATURES:

- HDMI 2.0, DP 1.4, USB 3.0/2.0 compliant
- Extend up to three displays with two types of video outputs HDMI and DP
- Supports Power Delivery(PD) up to 100W including maximum 85W for upstream charging.
- RJ45 Gigabit Ethernet Port provides high-speed internet.
- Data transfer rate up to 5Gbps, and downwards compatible with USB 2.0
- Features MicroSD and SD Card Reader SDHC/SDXC (Capacity up to 2TB). Supports SD V2.0, SDHC up to 32GB and SDXC up to 2TB.
- Windows 7/8/10 or later; MacOS X 10 or later required.
- Compact design and easy installation.
- Please note that the USB-C port must be compatible with Displayport technology in order to extend displays.

SPECIFICATIONS

CONNECTIVITY:

INPUT:	1 × USB-C [Female]
OUTPUT:	2 × HDMI [Type A, 19-pin female]
	1 × DisplayPort [Type A, female]
	4 × USB [Type A, female]
	1 × LAN [RJ45, 8-pin female]
	1 × MicroSD [female]
	1 × SD [female]

COMPLIANCES:

HDMI Compliance	: HDMI 2.0
USB Compliance	: USB 3.0 & 2.0
DP Compliance	: DP 1.4

SUPPORTED HDMI CABLES:

HDMI 2.0/2.1	: We recommend using high quality HDMI 2.0/2.1 cables under 30 feet for optimum performance
--------------	---

VIDEO OUTPUT:

Video Bandwidth for DP	: 32.4Gbps
Video Bandwidth for HDMI	: 18Gbps
Video Resolutions	: Up to 4K@60Hz

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: Yes
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No



POWER:

Power Consumption	: 15W (Max)
Power Supply:	Input : AC 100-240V 50/60Hz
	Output : DC 5V/1A





CONNECTION DIAGRAM

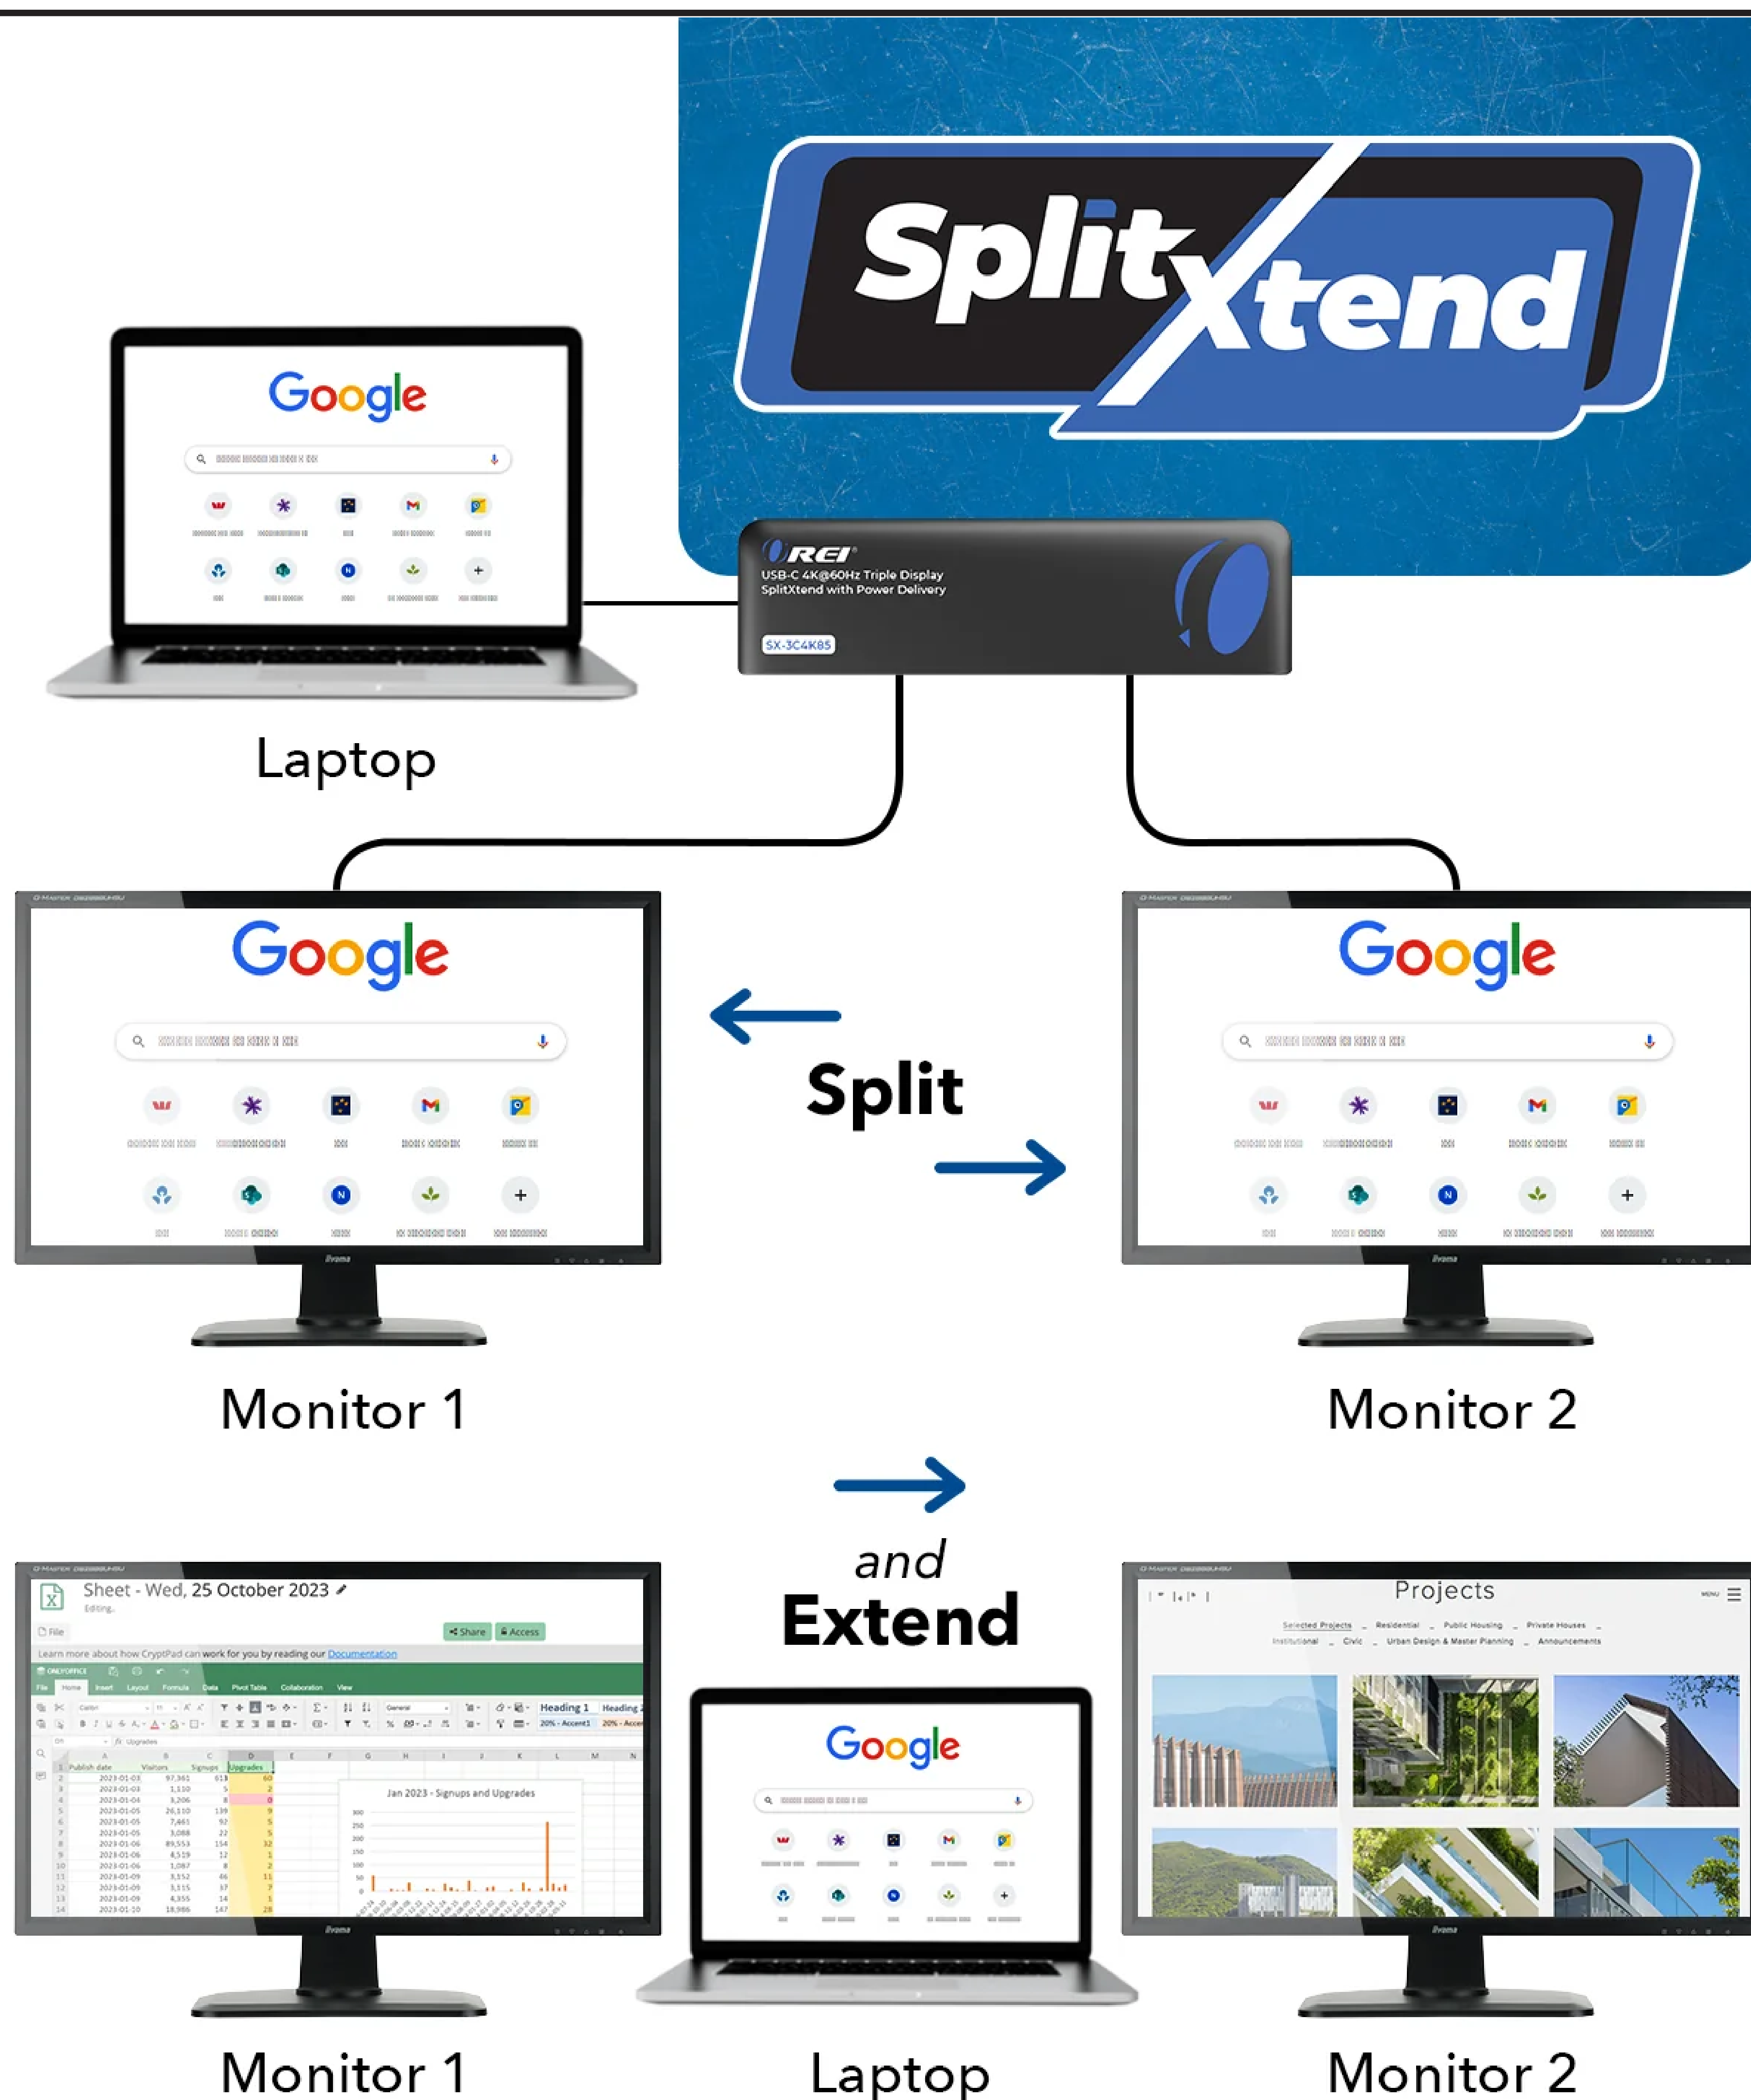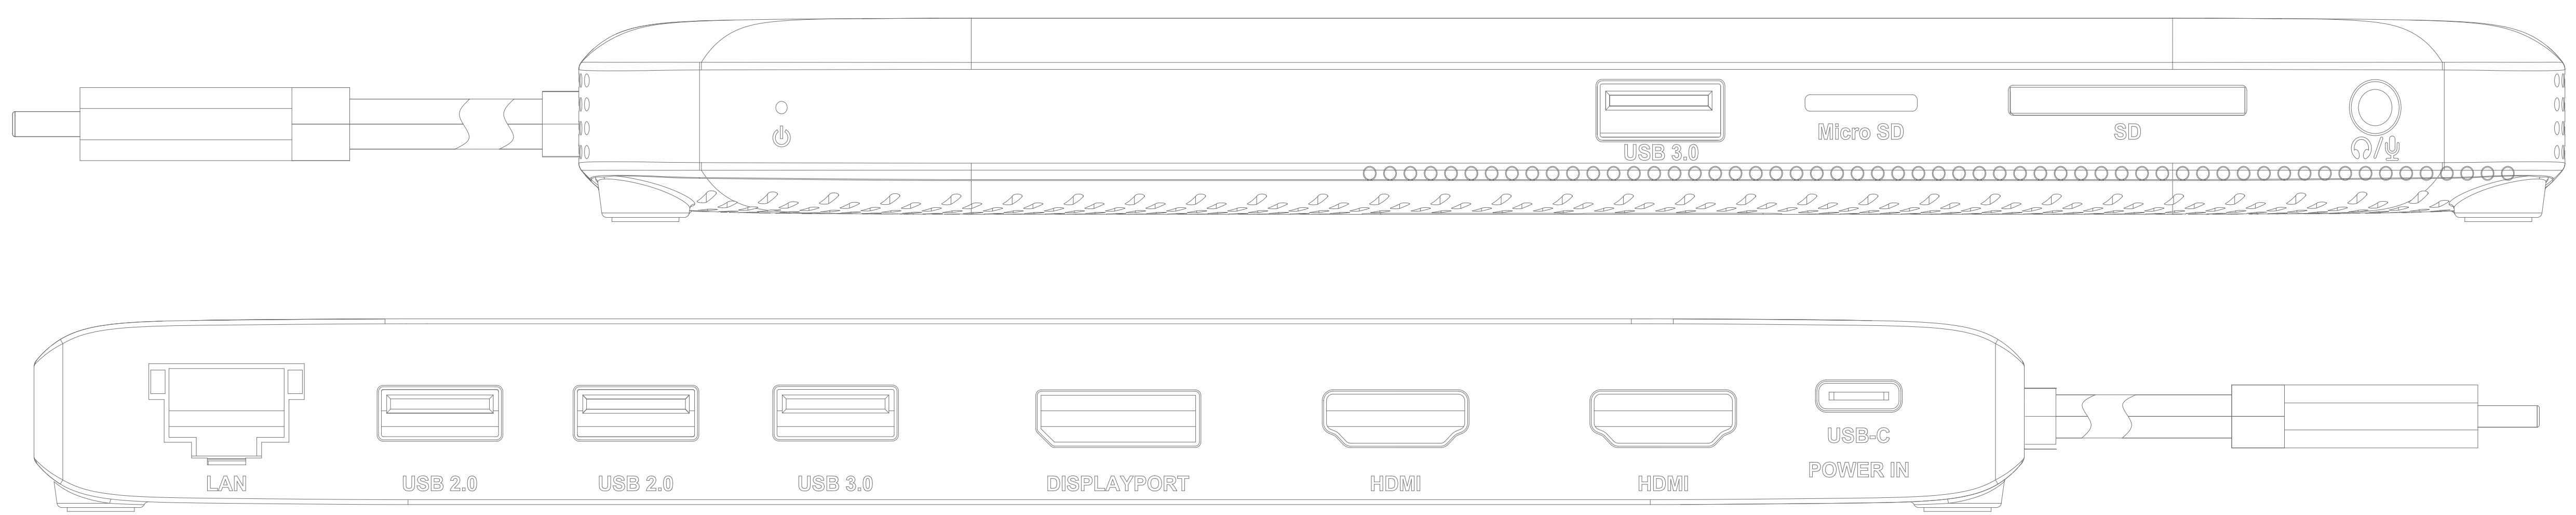

OVER 10 YEARS
EXPERIENCE

