



S series TB9330-E

Thermal Bullet Network Camera




384x256 • NETD < 50 mk • H.265 • Trend Micro IoT Security • -50°C ~ 60°C • IP66/67 • IK10 • NEMA 4X

VIVOTEK's TB9330-E is an H.265 outdoor thermal bullet network camera designed to detect people and vehicles in wild weather, difficult lighting conditions, and any situation that create poor visibility. With heat based thermal imagery and lens options of 8.8mm or 19mm, the TB9330-E supports long distance monitoring of vehicles up to 4,500m away even in complete darkness or under challenging climate conditions such as fog, rain, smoke and dust.

The TB9330-E offers 384x256 resolution with an uncooled thermal sensor and VIVOTEK's VCA (Video Content Analysis) to enhance perimeter protection and border security. This camera is also embedded with Trend Micro IoT Security software to provide users with higher levels of network protection. With an IP66, IP67, IK10 and NEMA 4X-rated rugged design, the TB9330-E will withstand shock & vibration, humidity, dust, and even extreme temperature fluctuations to maintain stable and reliable video no matter how harsh the environment.

Key Features

- Uncooled VOx Infrared Detector
- 384x256 Resolution
- NETD < 50 mk @ F1.0
- H.265 Compression Technology
- Trend Micro IoT Security within Standard Warranty Period
- Two-way Audio
- Supports ONVIF Standard to Simplify Integration and Enhance Interoperability
- UL Certification
- Weather-proof IP66/IP67, Vandal-proof IK10 and NEMA 4X-rated Housing
- VIVOTEK VCA (Video Content Analysis) Support

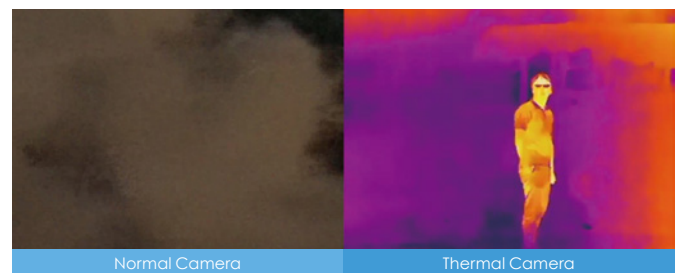

Infrared thermal image through fog and smoke.

Technical Specifications

Model	TB9330-E(8.8mm) TB9330-E(19mm)	Interface	10 Base-T/100 Base-TX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
System Information		ONVIF	Supported, specification available at www.onvif.org
CPU	Multimedia SoC (System-on-Chip)	Intelligent Video	
Flash	128MB	Video Motion Detection	Five-window video motion detection
RAM	512MB	VCA	Line crossing detection, field detection, loitering detection
Camera Features		VADP Package	Genetec package, Trend Micro IoT Security, Stratocast
Image Sensor	Uncooled VOx infrared detector	Alarm and Event	
Maximum Resolution	Effective pixels: 384x256 Image scale up to: 960x640	Alarm Triggers	Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection, MicroSD card life expectancy
Pixel Size	17 μm	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP, NAS server and MicroSD Card File upload via HTTP, SMTP, FTP, NAS server and MicroSD card
Spectral Range	8 ~ 14 μm	General	
Sensitivity	NETD < 50 mk	Connectors	RJ-45 cable connector for 10/100Mbps Network/PoE connection Audio input Audio output DC 12V power input AC 24V power input Digital input*1 Digital output*1 BNC RS485
Lens Type	Fixed-focal (Thermal Lens)	LED Indicator	System power and status indicator
Focal Length	TB9330-E(8.8mm): f = 8.8 mm TB9330-E(19mm): f = 19 mm	Power Input	DC 12V AC 24V (Redundant Power) IEEE 802.3at PoE Class 4
Aperture	F1.0	Power Consumption	PoE: Max. 12.5 W DC 12V: Max. 10 W AC 24V: Max. 11 W
Auto-iris	Fixed-iris	Dimensions	TB9330-E(8.8mm): 121 x 121 x 471.2 mm (with junction box) TB9330-E(19mm): 121 x 121 x 452.2 mm (with junction box)
Field of View	TB9330-E(8.8mm): 38.3° (Horizontal) 26.1° (Vertical) 45.4° (Diagonal) TB9330-E(19mm): 18.3° (Horizontal) 12.3° (Vertical) 21.9° (Diagonal)	Weight	TB9330-E(8.8mm): 2,080 g TB9330-E(19mm): 2,000 g
Pan/Tilt/Zoom Functionalities	ePTZ: 20x digital zoom (4x on IE plug-in, 5x built-in)	Casing	IP66, IP67, IK10(Metal Housing), NEMA 4X
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording	Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL, EN50121-4
Video		Operating Temperature	Start Temperature: -40°C ~ 60°C (-40°F ~ 140°F) Working temperature: -50°C ~ 60°C (-58°F ~ 140°F)
Compression	H.265, H.264, MJPEG	Humidity	90%
Maximum Frame Rate	30 fps @ 384x256	Warranty	36 months
Maximum Streams	4 simultaneous streams	System Requirements	
Video Streaming	Adjustable resolution, quality and constant bit rate control, Smart Stream II	Operating System	Microsoft Windows 8/7 Mac 10.12 (Chrome only)
Image Settings	Time stamp, text overlay, flip & mirror, configurable brightness/contrast/sharpness	Web Browser	Internet Explorer 10/11 Chrome version 58 or above
Audio			
Audio Capability	Two-way Audio (full duplex)		
Compression	G.726, G.711		
Interface	External microphone input External line output		
Network			
Users	Live viewing for up to 10 clients		
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/ RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, NTCP, SSL, TLS, CIFS/SMB		

Technical Specifications


Other Players VLC: 1.1.11 or above
QuickTime: 7 or above

Included Accessories


Others Quick installation guide, warranty card, screw pack, alignment sticker, junction box

Dimensions

• TB9330-E(8.8mm)

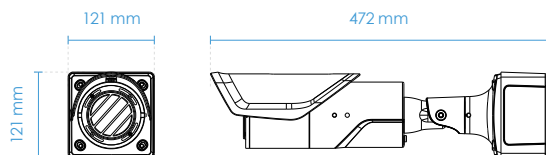

• TB9330-E(19mm)

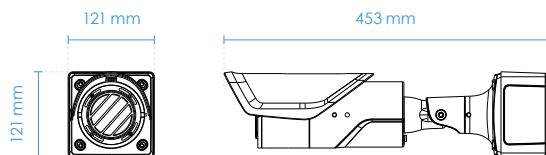

Compatible Accessories

Mounting Kits



AM-312
Pole Mount Adapter



AM-412
Corner Mount Adapter



AM-719
Junction Box (Standard Package)

Coverage Table

Resolution	384x256		
Focal Length	8.8mm		19mm
FOV	Horizontal	38.3°	18.3°
	Vertical	26.1°	12.3°
Human 1.8 x 0.5 m (5 x 1 ft)	Detection (1.5 pixels)	262 m (859 ft)	566 m (1856 ft)
	Recognition (6 pixels)	66 m (216 ft)	142 m (465 ft)
	Identification (12 pixels)	33 m (108 ft)	71 m (232 ft)
Vehicle 4 x 1.5 m (13 x 4 ft)	Detection (1.5 pixels)	800 m (2,624 ft)	1,729 m (5,672 ft)
	Recognition (6 pixels)	200 m (656 ft)	432 m (1,416 ft)
	Identification (12 pixels)	100 m (328 ft)	216 m (708 ft)

Note: The detection ranges are calculated using Johnson's criteria and may vary under different weather conditions.



All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved. Ver. 7

6F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C. | T: +886-2-82455282 | F: +886-2-82455532 | E: sales@vivotek.com | W: www.vivotek.com