

TNP-X6322EPT3-Z

2 MP 32x Network PTZ Explosion Proof Dome Camera



Key Features

- 2 MP (1920 x 1080) resolution, 32x optical zoom
- H.265, H.264, MJPEG codec support
- Multiple streaming, WiseStreamII support
- Day & Night (ICR), WDR (150dB)
- DIS with Built-in Gyro sensor
- Auto tracking, Intelligent video analytics
- Dual SD Memory slots (Maximum 512GB)
- Hazardous Rated for Class I II III Division 1 Groups B, C, D, E, F, G cFmus Approved and II 2 G Ex db IIB+H2 II 2 D Ex tb IIIC IECEX ATEX certified
- Patented design which includes a uniform constructed enclosure consisting of an integrated termination box manufactured directly into the camera housing
- Anodized aluminum housing

Accessories (Optional)



CERT NO. FM17US0156X & FM18CA0103X
 Class I Division 1 Groups B,C,D T6, Ta = -20°C to +55°C Type 4X, IP66
 Class II/III, Division 1, Groups E,F,G T6 Type 4X, IP66/67 Ta = -20°C to +55°C
 Class I, Zone 1, AEx/Ex db IIB+H2 T6 Gb Ta = -20°C to +55°C, Type 4X, IP66
 Zone 21, AEx/Ex tb IIIC T85°C Db Ta = -20°C to +55°C, Type 4X, IP66
 CERT NO. FM18ATEX0057X & IECEX FMG 18.0020X
 II 2 G Ex db IIB+H2 T6 Gb Ta = -20°C to +55°C, IP66
 II 2 D Ex tb IIIC T85°C Db Ta = -20°C to +55°C, IP66

TNP-X6322EPT3-Z	
VIDEO	
Imaging Device	1/2.8" 2.4 MP CMOS
Total / Effective Pixels	1,981 (H) x 1,288 (V), 2.55 MP / 1,944 (H) x 1,212 (V), 2.35 MP
Scanning System	Progressive
Minimum Illumination	Color: 0.05Lux (F1.6), B/W: 0.005Lux (F1.6)
S/N Ratio	50dB
LENS	
Focal Length (Zoom Ratio)	4.44 ~ 142.6mm (Optical 32x)
Maximum Aperture Ratio	F1.6(Wide) / F4.4(Tele)
Angular Field of View	H: 61.8° (Wide) ~ 2.19° (Tele) / V: 36.2° (Wide) ~ 1.24° (Tele)
Minimum Object Distance	Wide: 1.5m (4.92ft), Tele: 2m (6.56ft)
Focus Control	Auto / Manual / One shot AF
Lens / Mount Type	DC Auto Iris / Board-in type
PAN / TILT / ROTATE	
Pan / Tilt Range	360° Endless / 210° (-15° ~ 195°)
Pan / Tilt Speed	Preset: 700°/sec, Manual: 0.024°/sec ~ 200°/sec
Sequence	Preset (300ea), Swing, Group (6ea), Trace, Tour (1ea), Auto run, Schedule
Preset Accuracy / Azimuth	±0.2° / Yes (E/W/S/N/NE/NW/SE/SW)
Auto Tracking	Support
OPERATIONAL	
Camera Title	Off / On (Displayed up to 85 characters) - English / Numeric / International characters / Special characters - Common: Multi-line (Max. 5), Color (Gray / Green / Red / Blue / Black / White), Transparency, Auto scale by resolution
Day & Night	Auto (ICR) / Color / B/W / Schedule
Backlight Compensation	Off / BLC / HLC / WDR
Wide Dynamic Range	150dB
Contrast Enhancement	SSDR (Off / On)
Digital Noise Reduction	SSNRV (2D + 3D Noise filter) (Off / On)
Digital Image Stabilization	Off / On (Built-in Gyro sensor)
Defog	Off / Auto / Manual
Motion Detection	Off / On (8ea, Polygonal)
Privacy Masking	Off / On (24 rectangular zones) - Color: Gray / Green / Red / Blue / Black / White / Mosaic - Zoom ratio option for mask mode
Gain Control	Off / Low / Middle / High
White Balance	ATW / AWC / Manual / Indoor / Outdoor (including mercury & Sodium)
Electronic Shutter Speed	Minimum / Maximum / Anti flicker (1 ~ 1/12,000sec)
Digital Zoom	32x
Flip / Mirror	Off / On
Intelligent video analytics	Tampering, Loitering, Directional detection, Fog detection, Virtual line, Enter/Exit, (Dis) Appear, Face detection, Motion detection
Alarm Triggers	Alarm input, Motion detection, Video analytics, Network disconnect
Alarm Events	File upload Via FTP and E-mail, Notification Via E-mail, TCP and HTTP, Local storage (SD/SDHC/SDXC) or NAS recording at alarm triggers, Preset
Pixel counter	Support
NETWORK	
Ethernet	RJ-45 (10/100 BASE-T)
Video Compression Format	H.265 / H.264 (MPEG-4 part 10/AVC), MJPEG
Resolution	1920 x 1080, 1280 x 1024, 1280 x 960, 1280 x 720, 1024 x 768, 800 x 600, 800 x 448, 720 x 576, 720 x 480, 640 x 480, 640 x 360, 320 x 240
Maximum Framerate	H.265 / H.264: 60fps at all resolutions, MJPEG: 30fps at all resolutions
Smart Codec	Manual mode (Area-based : 5ea)
WiseStreamII	Support
Video Quality Adjustment	H.265 / H.264 / MJPEG: Target bitrate level control
Bitrate Control Method	H.265 / H.264: CBR or VBR, MJPEG: VBR
Streaming Capability	Multiple streaming (Up to 10 profiles)
IP	IPv4, IPv6
Protocol	TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, RTSP, NTP, HTTP, HTTPS, SSL/TLS, DHCP, PPPoE, FTP, SMTP, ICMP, IGMP, SNMPv1/v2c/v3 (MIB-2), ARP, DNS, DDNS, QoS, UPnP, Bonjour
Security	HTTPS (SSL) login authentication, Digest login authentication, IP address filtering, User access log, 802.1x authentication (EAP-TLS, EAP-LEAP)
Streaming Method	Unicast / Multicast
Maximum User Access	20 users at Unicast mode
Edge Storage	Micro SD/SDHC/SDXC 2 slots (up to 512 GB) - Continuous recording (1st slot to 2nd slot) Motion images recorded in the SD/SDHC/SDXC memory card can be downloaded. NAS (Network Attached Storage), Local PC for instant recording
Application Programming Interface	ONVIF Profile S/G, SUNAPI 2.0 (HTTP API), Wisenet open platform
Webpage Language	English, Korean, Chinese, French, Italian, Spanish, German, Japanese, Russian, Swedish, Portuguese, Czech, Polish, Turkish, Dutch, Hungarian, Greek
Web Viewer	Supported OS: Windows 7, 8.1, 10, Mac OS X 10.10, 10.11, 10.12 Plug-in Free Webviewer - Supported Browser: Google Chrome, MS Edge, Mozilla Firefox (Window 64bit only), MS Explorer 11, Apple Safari 10 (Mac OS X only)
Central Management Software	Wisenet WAVE, SmartViewer, SSM
ENVIRONMENTAL	
Operating Temperature / Humidity	-20°C ~ +55°C (-4°F ~ +131°F) / Less than 90% RH
Storage Temperature / Humidity	-30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH
Ingress Protection	Type 4x / IP66
ELECTRICAL	
Input Voltage / Current	PoE+ (IEEE802.3at, Class4)
Power Consumption	Maximum 24W
MECHANICAL	
Color / Material	RAL2000-Yellow Orange / Anodized Aluminum
Dimensions (WxH)	Ø8.6" x 15.82"
Weight	28 lb (12.7Kg)

* The latest product information / specification can be found at hanwhasecurity.com
 * Design and specifications are subject to change without notice.
 * Wisenet is the proprietary brand of **Hanwha Techwin**, formerly known as Samsung Techwin.

TNP-X6322EPT3-Z

2 MP 32x Network PTZ Explosion Proof Dome Camera



Model Number:

TNP-X6322EPT3-Z

Body Style :
PTZ Dome : P

Power
P : PoE+

Temperature Rating :
-20°C : T3


Certification :
FM C1/D1 : Z

Camera Series :

X : X Series
Q : Q Series

Resolution :
6 : 2 Megapixel

Dimensions

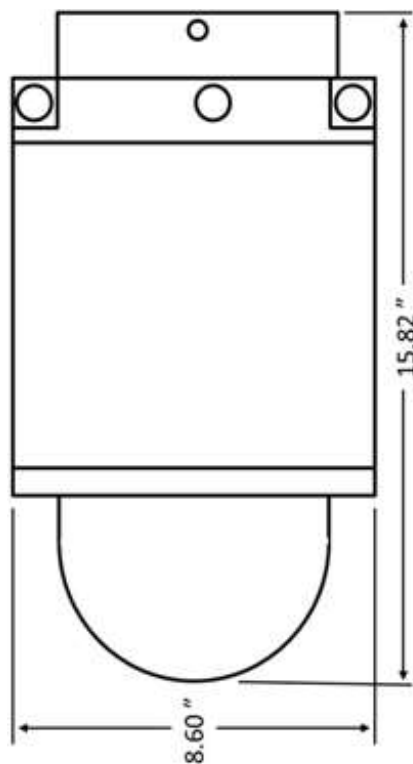

CERT NO. FM17US0156X & FM18CA0103X

Class I Division 1 Groups B,C,D T6, Ta = -20°C to +55°C Type 4X, IP66

Class II/III, Division 1, Groups E,F,G T6 Type 4X, IP66/67 Ta = -20°C to +55°C

Class I, Zone 1, AEx/Ex db IIB+H2 T6 Gb Ta = -20°C to +55°C, Type 4X, IP66

Zone 21, AEx/Ex tb IIIC T85°C Db Ta = -20°C to +55°C, Type 4X, IP66

CERT NO. FM18ATEX0057X & IECEx FMG 18.0020X

II 2 G Ex db IIB+H2 T6 Gb Ta = -20°C to +55°C, IP66

II 2 D Ex tb IIIC T85°C Db Ta = -20°C to +55°C, IP66