

UA-SNVR3240-N 32 CH H.265 / H.264 8 MP 4-Bay Standalone NVR



- Realtime AI Face Recognition (search, tracking, attendance and repeated recognition request)
- H.265 / H.264 video format
- Up to 32-ch IP camera input
- 2-ch HDMI, 1-ch VGA; HDMI #1 at up to 4K (3840 x 2160)
- HDMI and VGA simultaneous outputs
- 16 alarms input and 1 alarm output
- Up to 8 MP resolution recording
- 4 SATA HDDs, up to 10 TB for each HDD
- Two-way audio
- P2P function for GV-Eye app
- ONVIF cameras supported

Introduction

UA-SNVR3240-N is an H.264/H.265 Linux-embedded Standalone Network Video Recorder which records video files directly to the internal hard drives. UA-SNVR3240-N supports up to 32 channels of IP cameras for network surveillance. Featuring with up to 8 MP resolution video output, UA-SNVR3240-N eliminates the need of a separate PC to view and play back video from the unit.

With its Web Client on the web browser, users can access several functions, including Live View, Change Stream, Manual Alarm, Divide Screen, and more.

UA-SNVR3240-N integrates the capacity of AI-capable UA-IP cameras and provides various video analytics functions for perimeter protection. With the Face Recognition functions, users can access the database for face search, face tracking on E-Map, repeated visitor request, and face attendance request to enhance the convenience and security of the surveillance environment.

Specifications

System		
Operating system	Embedded Linux	
No. of Drive Bay	4 (3.5" SATA HDD)	
Video and Audio		
Compression	Audio: G.711 Video: H.264 / H.265	
Resolution	8 MP, 5 MP, 3 MP, 2 MP (1080P), 1.3 MP (960P), 1 MP (720P)	
Decoding		
Frame Rate	Main	8 MP: 60 fps in total (2 CH max.) 5 MP: 90 fps in total (3 CH max.) 4 MP: 120 fps in total (4 CH max.) 2 MP: 240 fps in total (8 CH max.)
	Sub	720P: 30 fps in total (18 CH max.) 720P: 16 fps in total (32 CH max.) VGA: 30 fps in total (32 CH max.)
Playback	Max. 16-ch playback	
Operation		
Max. Bandwidth	Input	256 Mbps
	Output*	128 Mbps


Playback Function		Fast forward/backward (2x, 4x, 8x, 16x) Slow forward (1/2x, 1/4x, 1/8x, 1/16x)
Event Management	Trigger	Schedule, Sensor Input, Motion Detection
	Action	-Store Video (AVI format) -Send e-mails with captured images -Upload captured images to FTP Server -Activate relay outputs to control external devices
Web Monitoring		IE 10 / 11 Safari V12.1 or above Firefox V52 or above Google Chrome V57 or above Edge V79 or above
Maintenance		Firmware upgrade through Web Browser or Utility
Interface		
Monitor	VGA	1 (1024 x 768, 1280 x 720, 1280 x 1024, 1440 x 900, 1600 x 1200, 1920 x 1080, 1920 x 1200) *Sync output with HDMI 1
	HDMI #1	1 (1024 x 768, 1280 x 720, 1280 x 1024, 1440 x 900, 1600 x 1200, 1920 x 1080, 1920 x 1200, 3840 x 2160) *Sync output with VGA
	HDMI #2	1 (1024 x 768, 1280 x 720, 1280 x 1024, 1440 x 900, 1920 x 1080) *Spot out only
Connector	Ethernet	1 port for LAN, RJ45 100/1000 Mbps 1 port for WAN, RJ45 100/1000 Mbps
	USB	USB 2.0 x 1 (front) USB 2.0 x 1, USB 3.0 x 1 (rear)
	Line In	1 RCA
	Audio Out	1 RCA
	RS-485	1
	Alarm Input/Out	16 in / 1 out
LED Indicator		2 LEDs: Power, HDD
General		
Language	Local	Arabic, Bulgarian, Traditional Chinese, Danish, English, German, Spanish, French, Japanese, Italian, Portuguese, Russian, Turkish, Finnish, Greek, Hebrew, Hindi, Korean, Persian, Polish, Romanian, Thai
	Web	English, German, Spanish, French, Japanese, Italian, Portuguese, Russian, Turkish
Mechanical Design	Dimensions (W x D x H)	378 x 324.8 x 52 mm (14.88" x 12.78" x 2.05")
	Net Weight	2.26 Kg (4.99 lb)
Rack Mount		Yes
Electrical	Power Source	Input: AC 100 ~ 240V, 50 ~ 60 Hz Output: DC 12V, 5A (Peak 6A), Max. 60W
	Power Consumption (excluding HDD and IP cameras)	12W
Operating Temperature/Humidity		Temperature: 0°C ~ 40°C (32°F ~ 104°F) Humidity: Less than 90% RH
Regulatory		CE, FCC, LVD, RoHS compliant

AI Integrated Function		
AI Analytics		Pedestrian Detection & Vehicle Detection, Perimeter Intrusion Detection, Line Crossing Detection, Stationary Object Detection, Cross Counting, Heat Map, Crowd Density Monitoring, Queue Length Detection, Face Detection, Rare Sound Detection *The AI analytics functions are only applicable when AI-capable UA-IP cameras are connected to the SNVR.
Face Recognition		Face Search, Face Tracking on E-Map, Repeat Visitor Request, Face Attendance Request *Face Recognition function is only applicable when AI-capable UA-IP cameras (firmware V1.01 or later) are connected to the SNVR.
Network		
Protocol		DHCP, DynDNS, HTTP, NTP, ONVIF, RTSP, TCP, UDP, IPv4, IPv6
Remote Monitoring		
Access from Web Browser		-Live View: Audio, PTZ Setting, Color Controls, Page View, Manual Alarm -Playback: Search Recordings, Stretch, Full Screen, Tag Playback, Picture Playback, Download -Remote Setting: Channel (Live, Image control, Video Cover, Motion, Intelligent), Record (Encode, Capture), Alarm (Motion, I/O, Intelligent, PTZ Linkage), Network (IP, DDNS, FTP, Email), Device (HDD Disk /Cloud), System
Live View	PC-Based Software	Max. connection subject to the total output bandwidth of UA-SNVR3240-N *A total of up to 4-channel connection is supported for one non-IE browser.
	Mobile App	Max. connection subject to the total output bandwidth of UA-SNVR3240-N
Playback	PC-Based Software	Max. connection subject to the total output bandwidth of UA-SNVR3240-N *A total of up to 4-channel connection is supported for each Web browser.
	Mobile App	Max. connection subject to the total output bandwidth of UA-SNVR3240-N
Application		
Software Supported		GV-Control Center (V4.1.0 + Patch), GV-Edge Recording Manager Windows Version (V2.2.4 + Patch), GV-ASManager (coming soon)
Smart Device Access		GV-Eye for iOS and Android (V2.9.1)

Note:

1. Fisheye dewarping is currently not supported.
2. Camera connection is not supported by GV-TMEB5800.
3. The maximum remote connection is subject to the total output bandwidth. See the maximum output bandwidth column for the specification.*
4. For system efficiency, it is recommended to use enterprise-level hard disk drives. For the supported hard disk drives, see [UA-SNVR HDD Compatibility Table](#).
5. Specifications are subject to change without notice.

Applications

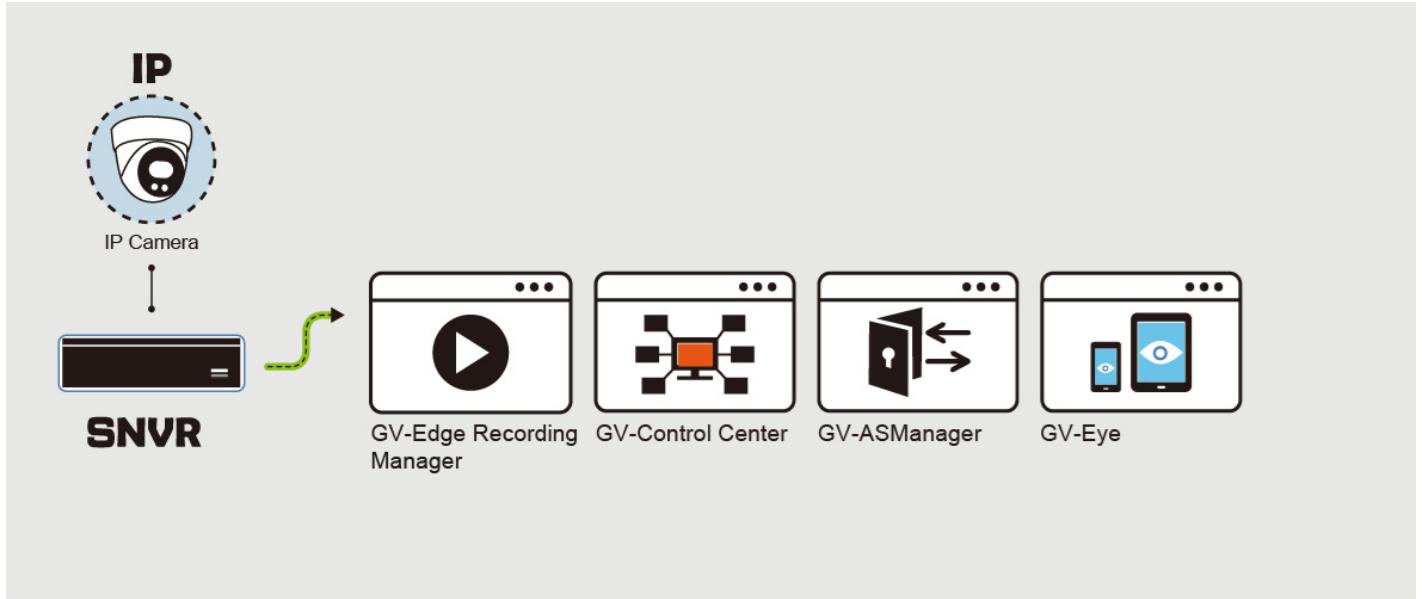

Packing List

- | | |
|-----------------------------|--|
| 1. UA-SNVR3240-N | 5. USB Mouse |
| 2. 3.5" HDD Screw Kit x 4 | 6. Power Adapter (DC 48V, 3.75A, 180W) |
| 3. Rack Mount x 2 | 7. Power Cord |
| 4. Screw for Rack Mount x 8 | 8. Download Guide |

Dimensions

