


UHDS-PRO108

4K@60Hz 1x8 HDMI™ Splitter (Downscaler)

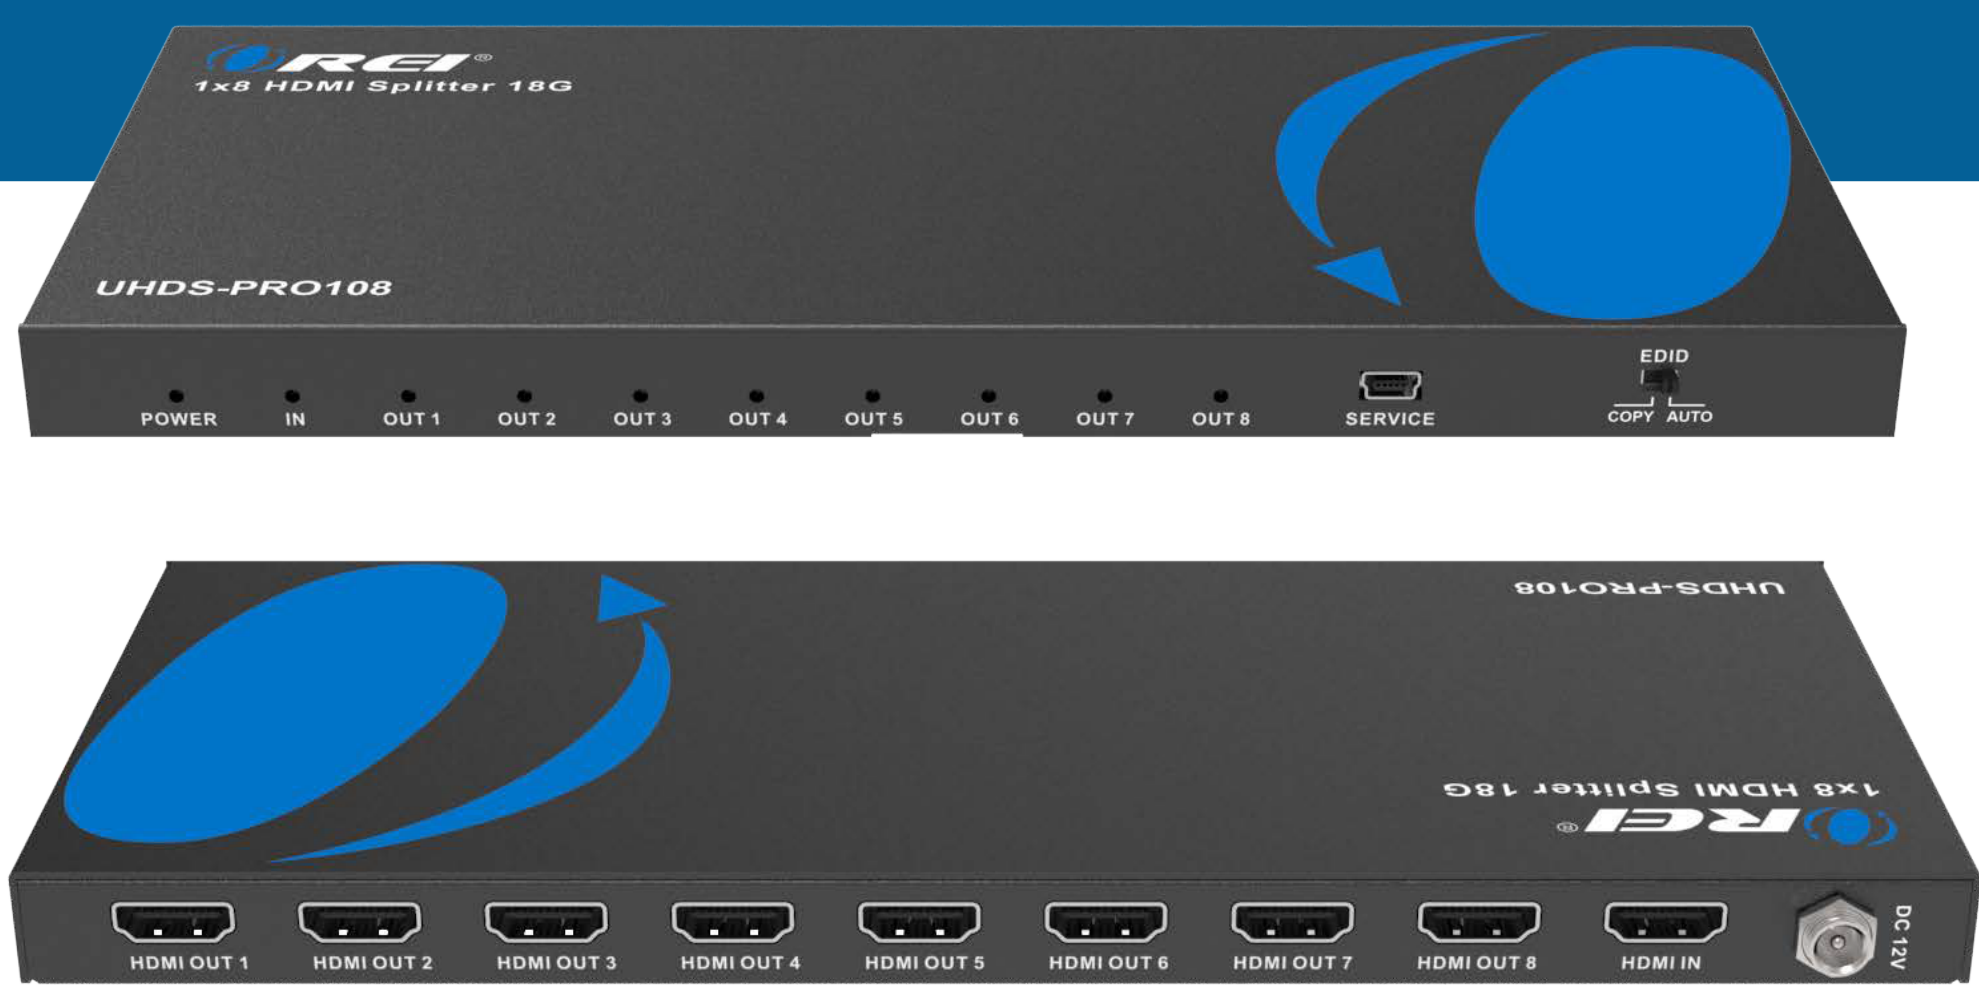

DIMENSIONS & WEIGHT:
Length: 243mm/9.57in **Width:** 102mm/4.02in
Height: 16mm/0.63in **Weight:** 572g/1.26lbs

The **UHDS-PRO108** is an 8-port HDMI splitter that distributes a single HDMI source to eight displays simultaneously with consistent signal quality. Compliant with HDMI 2.0b and HDCP 2.2, it supports resolutions up to 4K@60Hz with 18Gbps bandwidth for smooth playback. It supports LPCM 7.1, Dolby TrueHD, and DTS-HD Master Audio for immersive sound. A built-in downscale function allows 4K content to be converted to 1080p for HD displays. With EDID management and a compact, durable design, the UHDS-PRO108 is ideal for both residential and commercial AV installations.

PACKAGE CONTENTS: 1x UHDS-PRO108, 1x Power Adapter, User Manual

KEY FEATURES:

- HDMI 2.0b & HDCP 2.2 Compliant** – Ensures seamless compatibility with modern UHD sources and protected content.
- Video Resolutions up to 4K@60Hz** – Delivers crystal-clear UHD video output to two displays.
- 18Gbps Video Bandwidth** – Maintains uncompressed video and audio quality for optimal performance.
- HDR Support** – Provides superior contrast and color depth for a more immersive viewing experience.
- 4K to 1080p downscale** – Sends optimized resolution to mixed-display environments.
- Multi-Channel Audio Support** – Compatible with LPCM 7.1, Dolby TrueHD, and DTS-HD Master Audio formats.
- EDID Management** – Enhances communication and compatibility between source and displays.
- Compact & Easy to Set Up** – Plug-and-play design fits seamlessly into any home or commercial AV setup.

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: No
Downmix Function	: No
Downscale Function	: Yes
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

AUDIO SUPPORT:

HDMI Audio Formats:	: PCM 2.0, LPCM 7.1, Dolby Digital, DTS 5.1,
	Dolby Digital+, Dolby TrueHD, DTS-HD
	Master Audio, Dolby Atmos and DTS:X

POWER:

Power Consumption	: 6.15W (Max)
Power Supply:	Input : AC 100-240V 50/60Hz
	Output : DC 12V/1A

SPECIFICATIONS

CONNECTIVITY:

INPUT:	1 × HDMI [Type A, 19-pin female]
OUTPUT:	8 × HDMI [Type A, 19-pin female]
CONTROL:	1× Mini-USB B For Firmware Update

COMPLIANCES:

HDMI Compliance	: HDMI 2.0b
HDCP Compliance	: HDCP 2.2

SUPPORTED HDMI CABLES:


HDMI 2.0	: We recommend using high quality HDMI
	2.0 cables under 30 feet for optimum
	performance

EXTENDING DISTANCE:

4K@60Hz	: 25 Feet
1080P@60Hz	: 30 Feet

VIDEO OUTPUT:

Video Bandwidth	: 18Gbps
Video Resolutions	: 4K@60Hz, 1080p@60Hz

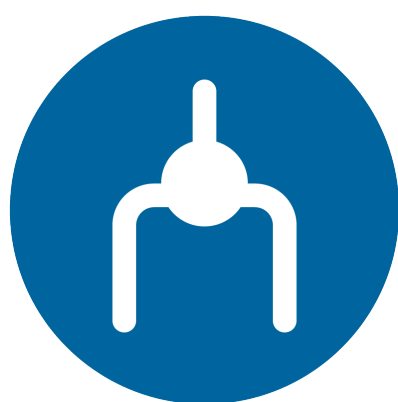



OVER 10 YEARS
EXPERIENCE



FULL 1 YEAR
LIMITED WARRANTY



CONNECTION DIAGRAM

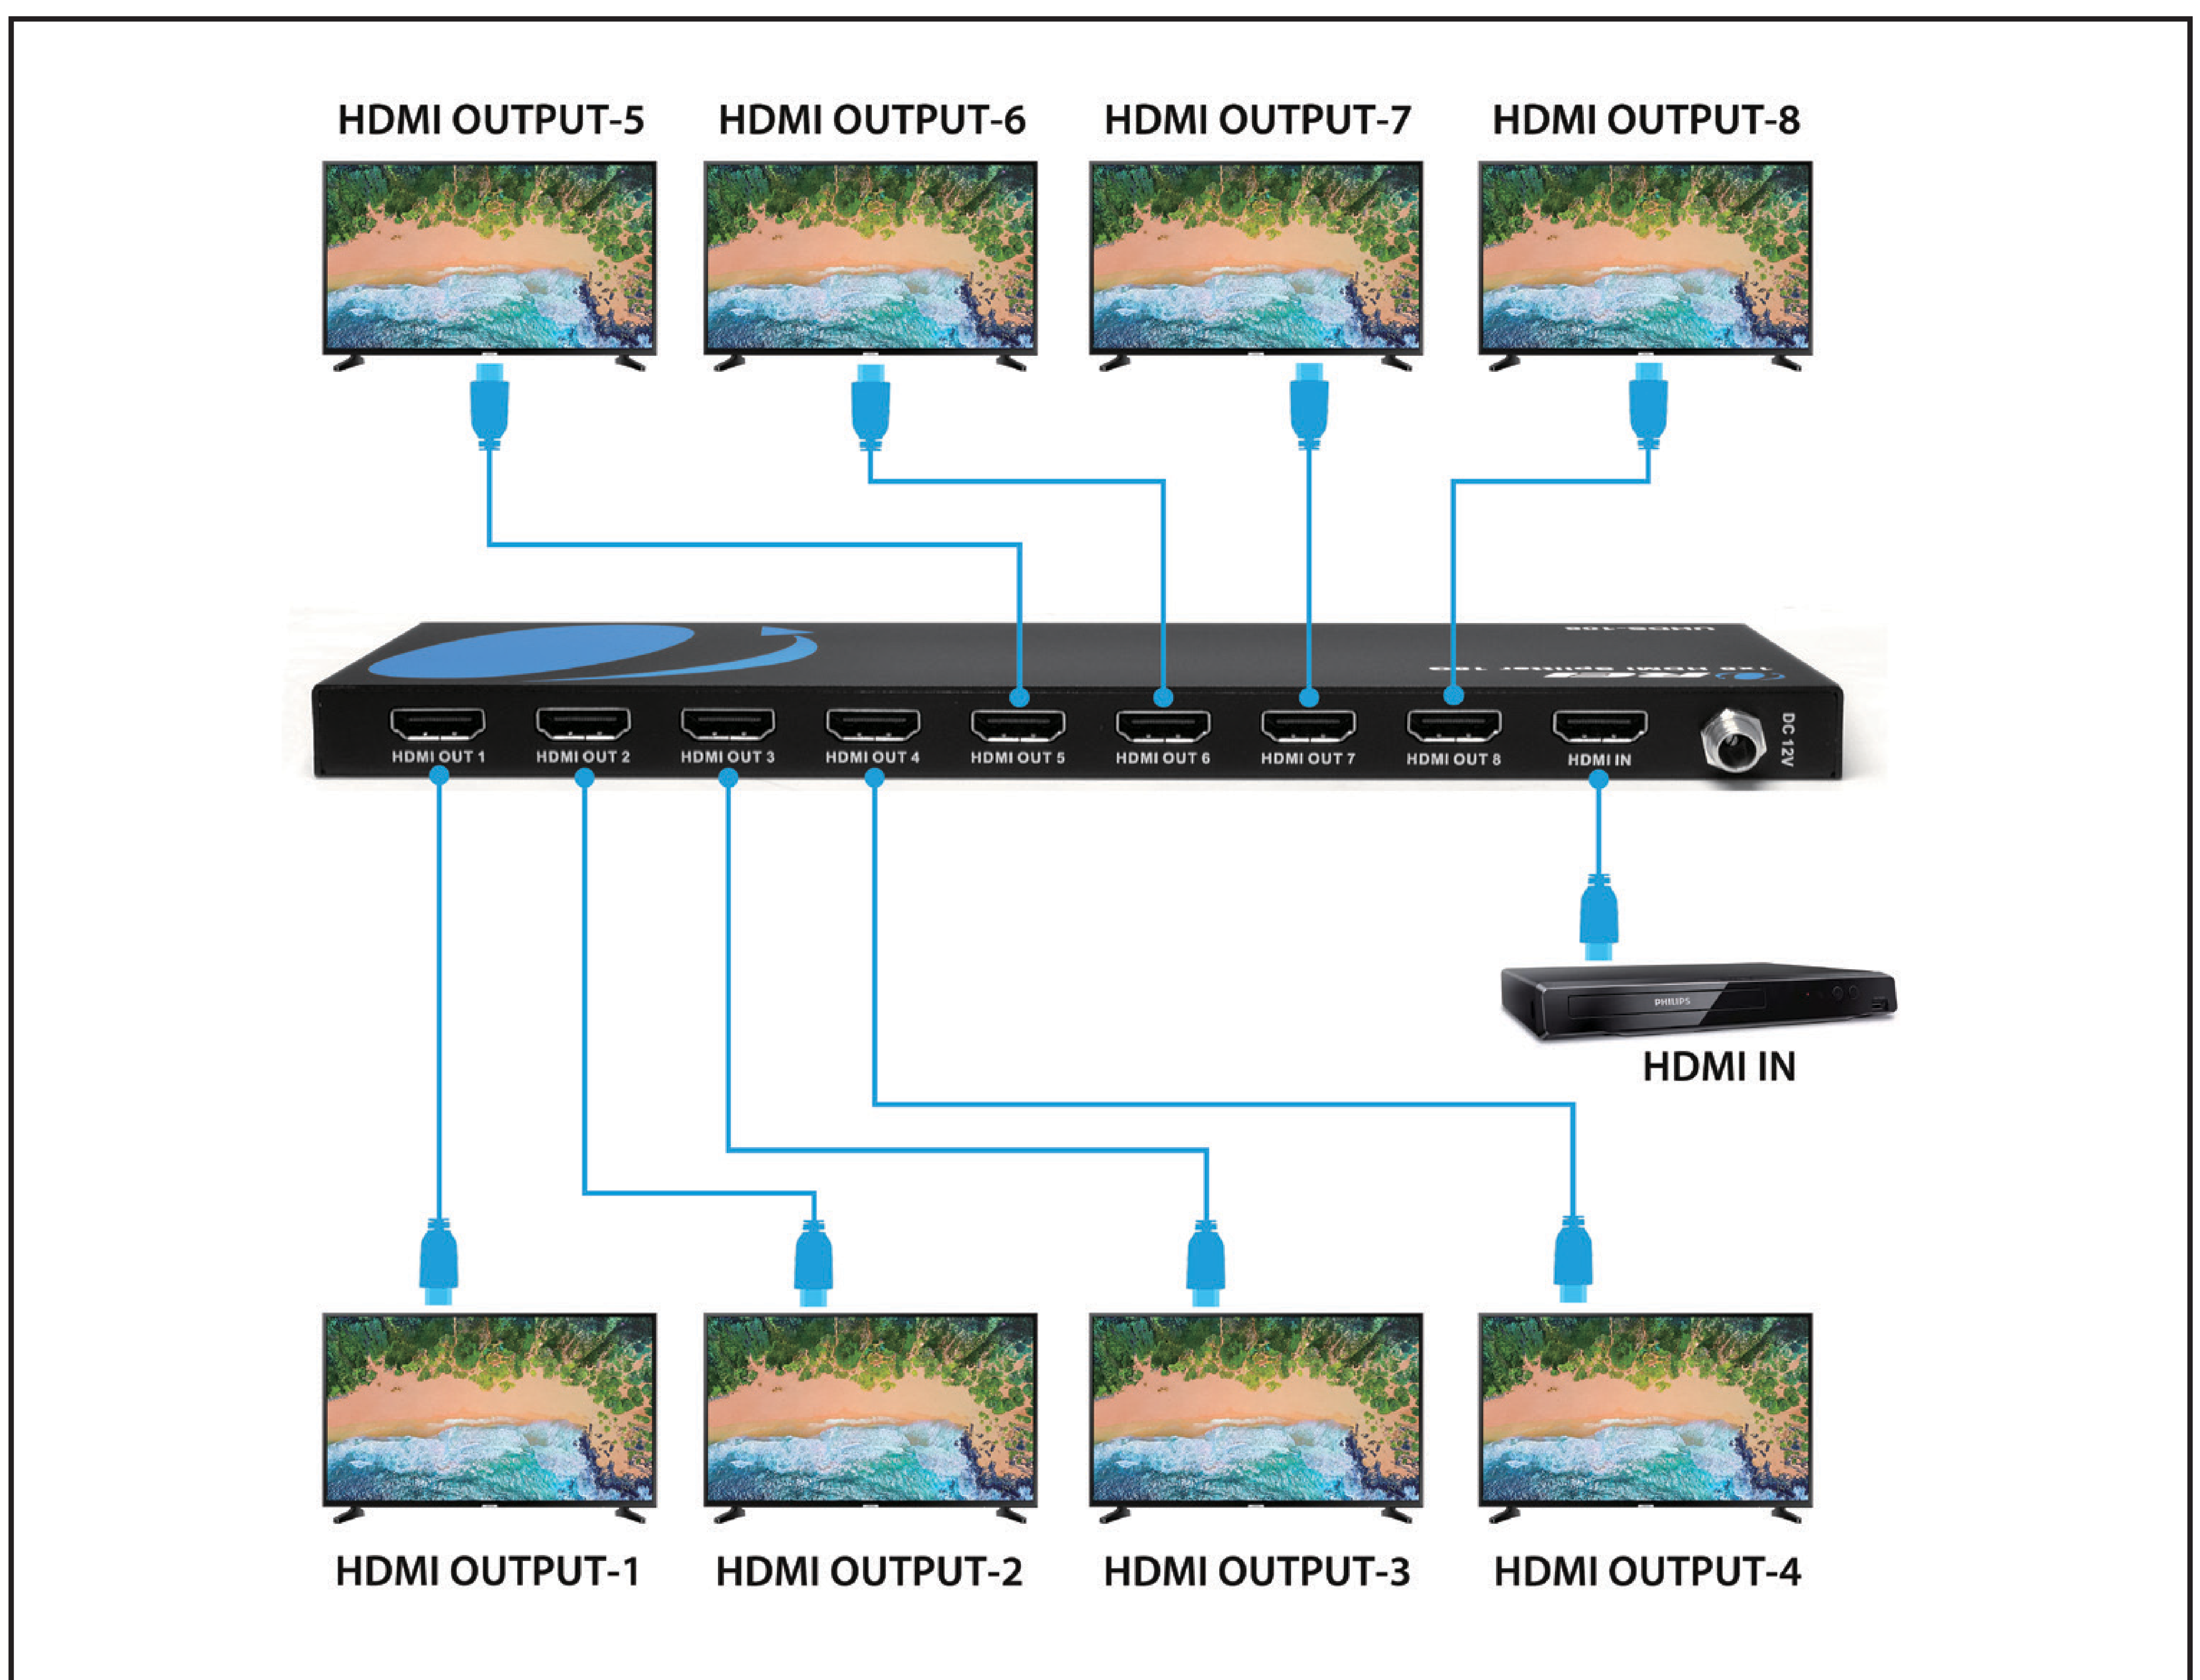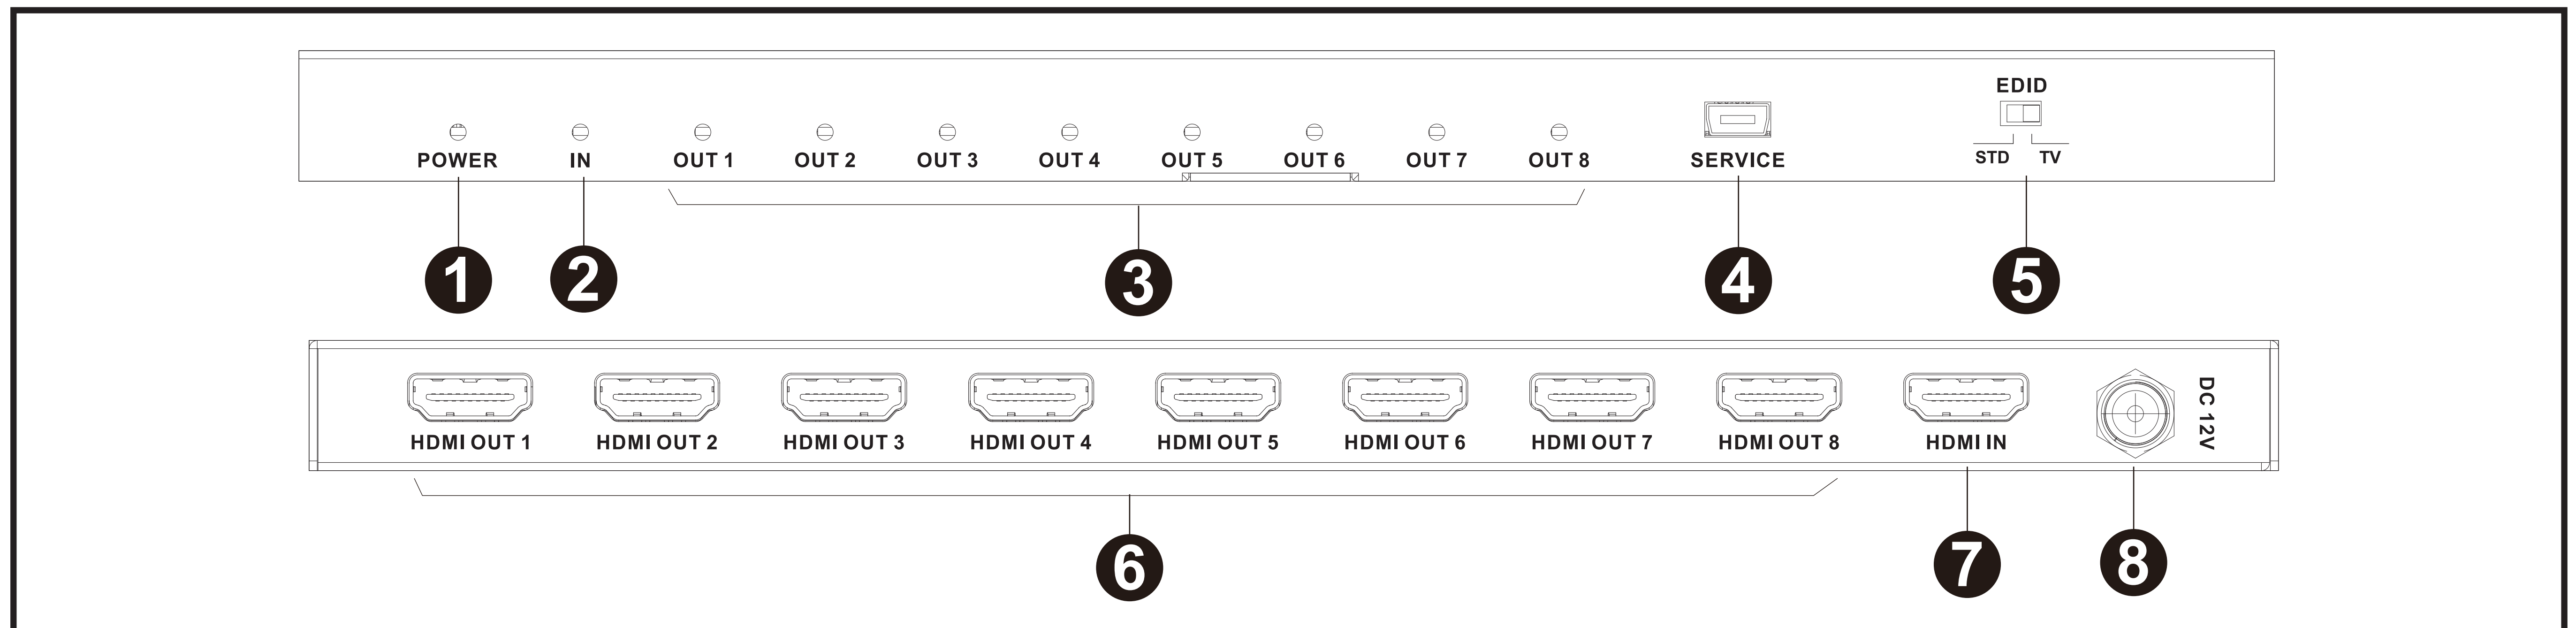

OVER 10 YEARS
EXPERIENCE



FULL 1 YEAR
LIMITED WARRANTY