

UKM-404

USB 3.2 4x4 Matrix



DIMENSIONS & WEIGHT:

Length: 250mm / 9.84in **Width:** 80mm / 3.15in
Height: 21mm / 0.83in **Weight:** 510g / 1.12lb

PACKAGE CONTENTS: 1x UKM-404, 1x IR Remote, 1X IR Receiver Cable (1.5m), 4X USB Cable (USB 3.0 Type A to Type B, 1.8m) 1X 3pin-3.81mm Phoenix Connector, 4X Machine Screw (KM3*4), 2x Mounting Ear, 1x Power Adapter, User Manual

KEY FEATURES:

- USB 3.2 Gen 1 Compliant – Supports high-speed connectivity and compatibility with the latest USB standards.
- Data Transfer Rate up to 5Gbps – Enables quick and efficient data transmission between devices.
- 4x4 USB Matrix Switching – Connect and switch between 4 USB peripherals across 4 computers or laptops.
- 5V/1.5A Output on USB-A Ports – Provides reliable power for connected USB devices.
- Backward Compatible – Works with USB 2.0 and 1.1 for legacy device support.
- Plug and Play Operation – No drivers required for setup; ready to use out of the box.
- Cross-Platform Compatibility – Fully supports Windows, Linux, and MacOS systems.
- Multiple Control Options – Operate via included remote, RS-232 port, or Web-based GUI for convenient access.

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: Yes
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: Yes

POWER:

Power Consumption	: 13.2W(MAX)
Power Supply:	Input : AC 100-240V 50/60Hz
	Output : DC 24V/2A

SPECIFICATIONS

CONNECTIVITY:

INPUT:	4 × USB Host [USB 3.2 Gen 1 Type B, 9-pin female]
OUTPUT:	4 × USB Device [USB 3.2 Gen 1 Type A, 9-pin female]
CONTROL:	1 × TCP/IP [RJ45]
	1 × RS-232 [3pin-3.81mm phoenix connector]
	1 × IR EXT [3.5mm stereo mini-jack]



OVER 10 YEARS
EXPERIENCE




FULL 1 YEAR
LIMITED WARRANTY




CONNECTION DIAGRAM

Front Panel

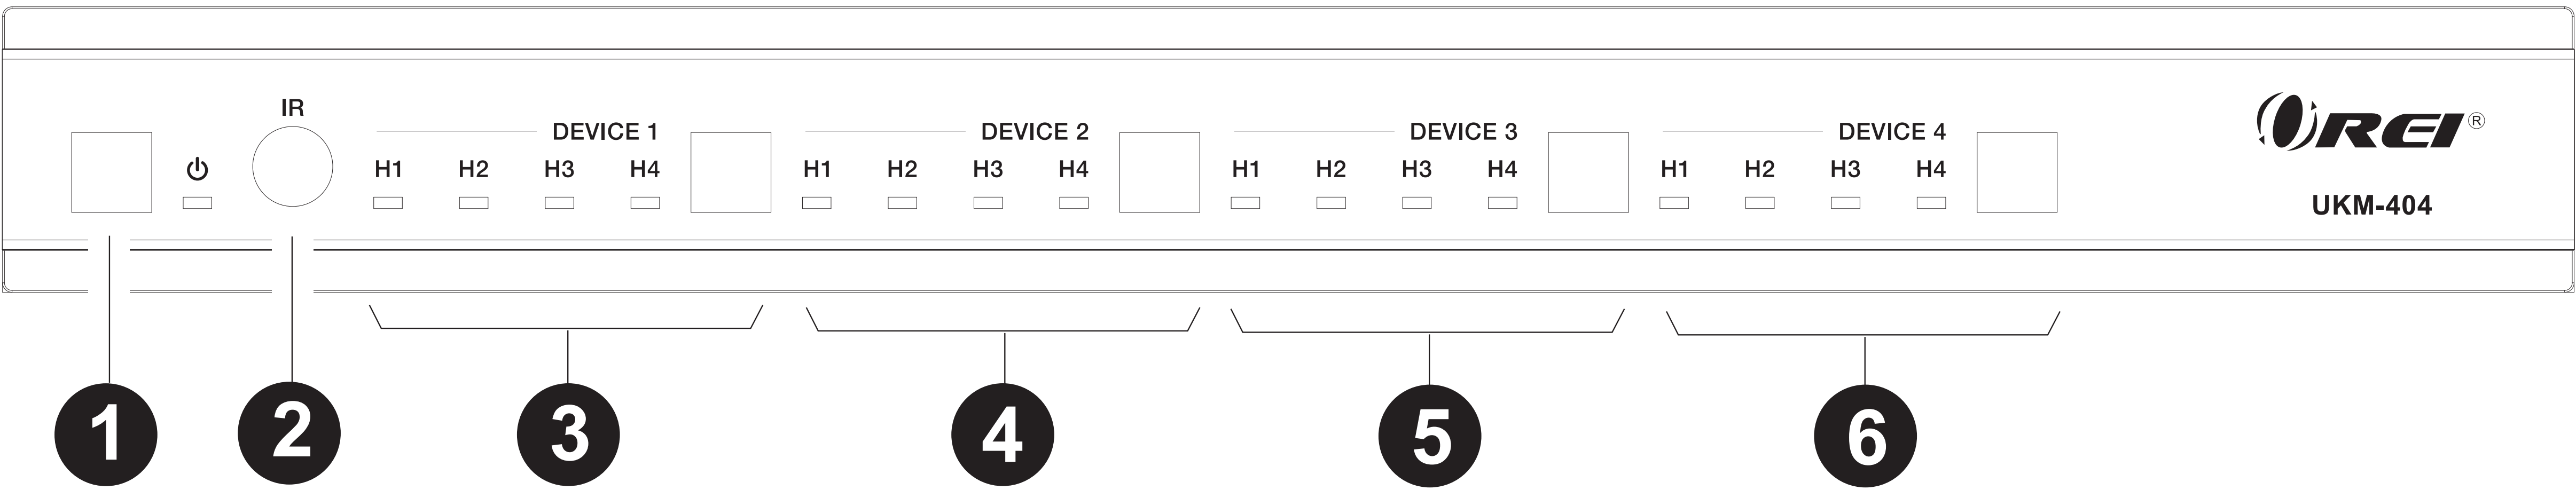

Rear Panel

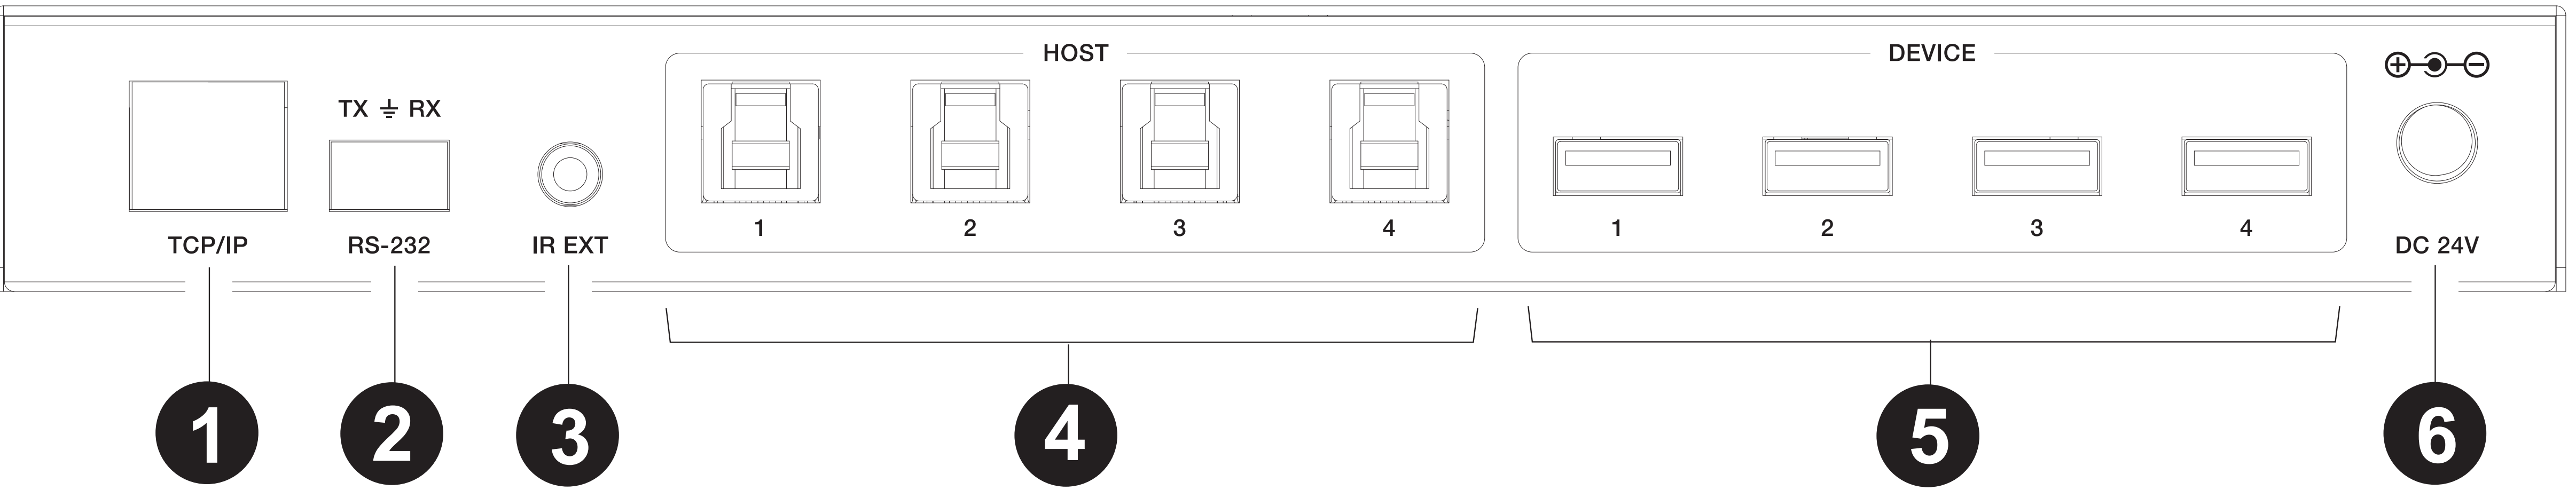

OVER 10 YEARS
EXPERIENCE



FULL 1 YEAR
LIMITED WARRANTY