




### Description

The **VB31PT** video balun transceiver is a video transmission device that provides a low cost means of sending live video over unshielded twisted pair, point-to-point wiring for distances up to 750 feet with other passive balun transceivers and up to 1,500 feet with TR515 single channel and model 51 series hubs. The VB31PT is compatible with all of the “up-the-coax” control systems. A basic system uses (2) video balun transceivers, one at each end of a twisted pair of wires. These units are intended for use over existing in-house telephone wiring, Category 5 wiring or other twisted pair cable runs to provide a convenient, cost-effective alternative to coax. The VB31PT is designed to provide superior immunity from noise and interference even when running next to line power! The VB31PT also provides a unique mounting tab and strain relief.

### Features

- Quality video over ordinary twisted pair cable
- Immunity to noise and interference
- Passive devices—do not require power
- Video and P/T/Z over a single pair (with “up-the-coax” systems)
- Mini-coax pigtail for in-camera or dome mounting
- Weather resistant design
- Easier to install than coax
- Compatible with all twisted pair equipped cameras, enclosures and domes

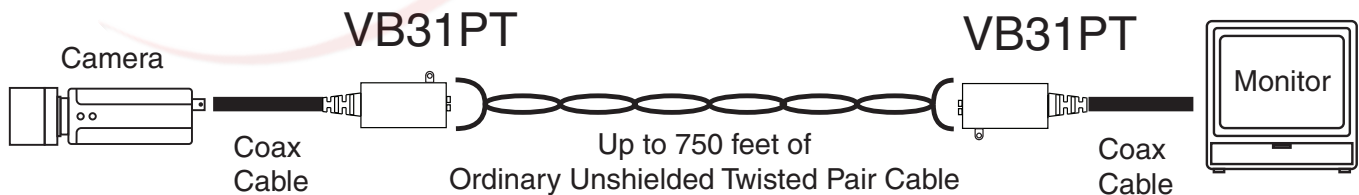

Basic Twisted Pair Video Transmission System



USA

5410 Newport Drive, # 24  
Rolling Meadows, IL 60008  
Phone: (847) 259-8900  
Fax: (847) 259-1300  
E-mail: [info@nitek.net](mailto:info@nitek.net)  
[WWW.NITEK.NET](http://WWW.NITEK.NET)

EUROPE

De Schans 19-21 2a  
8231 KA Lelystad  
Tel: +31(0)320-2300005  
Fax: +31(0)320-282186  
E-mail: [info@nitek.nl](mailto:info@nitek.nl)  
[WWW.NITEK.NL](http://WWW.NITEK.NL)

# TECHNICAL SPECIFICATION

## Transceiver Unit

Size	0.9" H x 1.0" W x 1.75" D (not including coax)
Input	1 Vpp composite video Monochrome or Color
Output	Balanced low voltage current loop

## System (2 transceivers required)

Video Format	PAL, SECAM, NTSC, RS170, CCIR (Color or B/W)
Video Input	1 Vpp composite video Monochrome or Color
Operating Frequency	DC to 10 MHz
Common Mode Rejection	>60 dB
Wire Size	26 to 18 AWG twisted pair
DC Loop Resistance	51 Ohms/1,000 ft (max)
Nominal Capacitance	17pF/ft
Impedance	100 Ohms +/- 20%
Category Wire	2 or better
Temperature Range	-10°C to +85°C
Humidity Range	0 to 98%, non-condensing
Enclosure Material	Black, ABS flame retardant plastic
Twisted Pair Connection	Screw terminals
Shipping Weight	1 lb

## Wire and Cable Recommendations

We recommend using unshielded twisted pair wiring. The systems will operate over wire 26 to 18 AWG but are optimized for 24 AWG. Category cables may be used. Individually shielded pairs should be avoided, as they drastically reduce the operating range of the systems. Multi-pair cable with an overall shield is acceptable. Video can be operated in the same communication cable coexistent with telephone, computer, control signals, power voltages and other video signals. While video may be routed through telephone punch down block terminals, any bridge-taps, also called T-taps and any resistive, capacitive or inductive devices MUST BE removed from the pair.