

# VTD-TND4RFA4

Transcendent Gen. IV 4 MegaPixel Advanced A.I.  
Fixed Lens Vandal Dome Camera [PRELIMINARY SPECS]



## KEY FEATURES

- 1/3" 4 MegaPixel Progressive Scan Starlight CMOS Sensor
- Up to 30fps @ 4 MegaPixel (2592x1520)
- Available in 3.6 or 2.8mm Fixed Lens Configurations:  
VTD-TND4RFA4 (Ivory w/ 3.6mm), VTD-TND4RFA4-2 (Ivory w/ 2.8mm),  
VTD-TND4RFA4B (Charcoal w/ 3.6mm),  
VTD-TND4RFA4B-2 (Charcoal w/ 2.8mm)
- Matrix IR (up to 100' IR Range)
- True Wide Dynamic Range (120dB)
- True Mechanical Day/Night function by ICR
- XD-DNR (3D & 2D-DNR) Noise Reduction
- Gen. IV Advanced Analytics: Regional Entrance / Exit Detection, Line Crossing, Target Counting [All by Human / Motor Vehicle Classification] Face Detection, Object Abandoned / Missing, Heat Map, Video Blur, Video Color Cast Detection, Abnormal Video
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- 1 Ch. Audio In + Built-in Mic\* + Alarm In / Out
- Remote Viewing via CMS, Web Browser, iOS & Android Apps
- ONVIF Compliant
- MicroSD Card Slot for Local Recording (256GB)
- IP67 Weather Resistance + IK10 Impact Rating
- Optional Junction Box (VT-TJB03A), Wall Mount (VT-TWMT3), Pendant Mount (VT-TPDM-1 [reqs. VT-TJB03A]) and In-Ceiling Semi Flush Mount (VT-TFMT-S) Available [See Additional Mounting Options Below]
- 12VDC & PoE (Power over Ethernet) Operation
- 3-Year Warranty



## TRANSCENDENT "GEN IV" SERIES NDA A COMPLIANT IP CAMERAS WITH AI POWERED FACIAL DETECTION AND MORE!

Transcendent Series NDA A Compliant High Definition 4 Megapixel IP Network Cameras with Gen. IV Advanced Analytics including Face Detection and Target Counting offer unprecedented performance and value. These simple, easy to install, attractively styled, IP Network Cameras transmit over remote viewing via CMS, Web Browser, and iOS & Android Apps.

\*Please research local, state and federal laws regarding the implementation of audio surveillance.

## GEN. IV ADVANCED ANALYTICS



### FACIAL DETECTION


Security personnel can find out who entered / left the restricted area and at what time

### TARGET COUNTING

Keep count of vehicles, motorbikes, bicycles and people in a given area

### REGIONAL ENTRANCE/EXIT

Begin NVR recording and receive an alert upon subjects entering / exiting; ideal for property monitoring

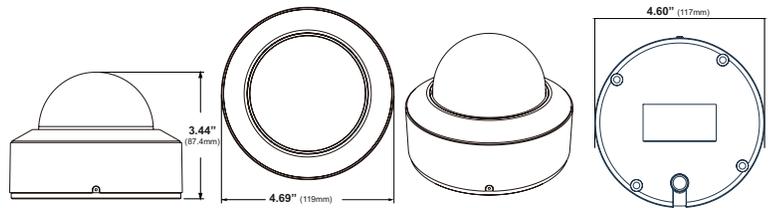

Pair with VITEK Transcendent Series Network Recorders VT-TNR818PF, VT-TNR1646PF, and VT-TNR3216PF with Built-in PoE and Fully Programmable Intelligent Analytics including Facial Detection.

An Eye On Innovation

VT-TJB03A  
Optional Junction box for Cable Management

VT-TWMT3  
Optional Wall Mount

VT-TPDM-1  
Pendant Mount - reqs. VT-TJB03A

VT-TFMT-S  
In-Ceiling Semi-Flush Mount

VT-TPLMT  
Universal Pole Mount Adapter - reqs. VT-TJB03A

VT-TCNMT  
Universal Corner Mount Adapter - reqs. VT-TJB03A



www.vitekccv.com



## DETAILED SPECIFICATIONS

Image Sensor	1/3" 4.0 Megapixel Progressive Scan CMOS
NDAA Compliant	Yes
Image Size	4 MegaPixel (2592 × 1520)
Resolution	4 MP(2592 × 1520) / 3 MP(2304 × 1296) / 1080P(1920 × 1080) / 720P(1280 × 720) / D1 / CIF(480 × 240)
Min. Illumination	0.005 lux@F1.6,AGC ON;0 lux with IR
Lens	2.8mm or 3.6mm Fixed Iris Lens Options Available
Day / Night	True Day / Night by ICR
IR LEDs / IR Distance	1 Matrix Style IR / Up to 100'
Video Compression	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Audio Compression	G.711A / G.711U
Main-Stream	4MP/2K/3MP/1080P / 720P (60Hz: 1 ~ 30fps, 50Hz: 1~25fps) HFR mode: 1080P / 720P (60Hz: 1 ~ 60fps, 50Hz: 1~50fps)
Sub / Third Stream	720P/D1/CIF (60Hz: 1 ~ 30fps, 50Hz: 1~25fps) / D1/CIF/480x240 (60Hz: 1 ~ 30fps, 50Hz: 1~25fps)
Bit Rate / Type	64 Kbps ~ 8 Mbps / VBR, CBR
Wide Dynamic Range	120dB Super WDR
Other Features	Highlight Compensation, Backlight Compensation, DeFog, Hardware Reset
Digital Noise Reduction	XD-DNR (3D-DNR & 2D-DNR)
Image Setting	ROI, Saturation, Brightness, Chroma, Contrast, Sharpen, NR; adjustable through client software / web browser
Gen. IV Advanced Analytics	Regional Entrance / Exit Detection, Line Crossing, Target Counting [All by Human / Motor Vehicle Classification] Face Detection, Object Abandoned / Missing, Heat Map, Video Blur, Video Color Cast Detection, Abnormal Video
Smart Alarm	Motion Detection, SD Card Error, SD Card Full
Region of Interest (ROI)	Each ROI to be configured separately
Audio	1 Ch. Audio In + Built-in Mic*
Alarm	1 Ch. In + 1 Ch. Out
Local Storage	Built-in MicroSD Card Slot (up to 256GB)
Remote Viewing	CMS / Web Browser / Mobile (iOS/Android)
Supported Browsers	IE, Chrome, Firefox, Safari and Edge
Connection Protocol	ONVIF
Ingress Protection / Impact	IP67 + IK10 Impact Rating
Power Input	12VDC / PoE
Pwr Consumption (12VDC)	350mA (LEDs Off) / 550mA (LEDs On)
Power Consumption (PoE)	<5.5W
Working Environment	-22° ~140°F (-30°~60°C) / < 95% Humidity
Weight	23.64oz / 1.48lbs / .67kg (NET) 29.63oz / 1.85lbs / .84kg (SHIPPING)
Dimensions (Dia × H)	4.69" × 3.44" (119mm × 87.4mm)

\*Please research local, state and federal laws regarding the implementation of audio surveillance.