VTM-TLM22B

Transcendent 22" 1080P LED Professional Security Monitor with 2ea Composite BNC In / 1ea BNC Out, HDMI, & VGA Inputs

VITEK ®
INDUSTRIAL VIDEO PRODUCTS, INC.

KEY FEATURES

- 22" TFT-LED Display with 16:9 Aspect Ratio
- 1080P Resolution (1920×1080)
- 2x BNC Inputs with 1x BNC Output (Looping), 1 × HDMI, VGA, Audio IN/OUT
- Integrated Speakers
- Super Slim Design
- 5ms Response Time
- 178° / 178° Horizontal and Vertical Viewing Angle
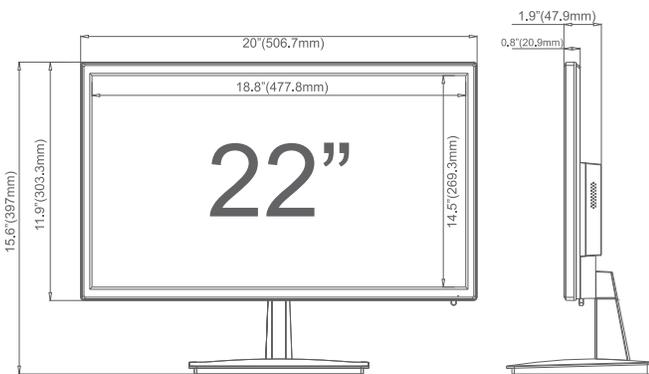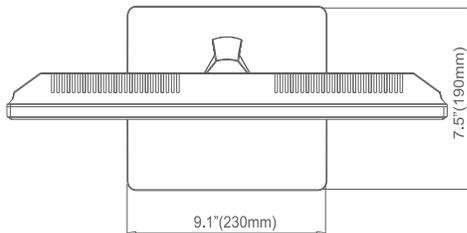- Remote Control Included
- 3 Year Warranty

REAR CONNECTIONS

2 × BNC IN with 1 × BNC OUT (Looping), Plus HDMI, VGA, Audio IN / OUT, & ISP / USB Service Port.

DIMENSIONS

7.5"(190mm)

9.1"(230mm)

1.9"(47.9mm)
0.8"(20.9mm)

20"(506.7mm)
18.8"(477.8mm)

22"

15.6"(397mm)
11.9"(303.3mm)
14.5"(269.3mm)

TRANSCENDENT | 22-INCH PANEL | 2 × BNC IN + 1 × BNC OUT | AUDIO IN / OUT | HDMI INPUT | VGA | NDAA COMPLIANT

NDAA COMPLIANT

HDMI HIGH-DEFINITION MULTIMEDIA INTERFACE

TRANSCENDENT

A PROFESSIONAL SECURITY MONITOR DESIGNED AND BUILT TO SUPPORT VITEK'S HIGHEST QUALITY INDUSTRIAL VIDEO PRODUCTS

Complete your security system with this cost-effective VITEK Transcendent Series NDAA Compliant Professional Grade HD Security Monitor. This 22" 16:9 backlit LED display is designed for 24/7 continuous use in critical security applications. Features a 50,000+ hour panel life with Dynamic Optimization, Natural Color, Contrast & Detail Enhancement, and more!

OPTIONAL ACCESSORIES

VT-LCD/PMT
LCD Monitor Swivel Pole

VT-LCD/WMT-R
Rotating LCD Wall Mount

FC

RoHS

SPECIFICATIONS

Panel Type	22" 16:9 TFT-LED Backlit Monitor
Active Display Area	18.77"(W) × 10.56" (H) / 476.64mm × 268.11mm
Resolution	1920 × 1080
Display Mode	16:9
Pixel Pitch	0.248(H) × 0.248(V)
Contrast Ratio	10,000:1
Brightness	300 cd/m²
Response Time	5ms
Colors	16.7M
Viewing Angle (H/V)	178º/178º
Inputs / OUTPUTS	2 × BNC (BNC In / Out) + 1 × HDMI + 1 × VGA + 1 × ISP / USB Service Port + Audio In / Out
Speakers	2 × 3W (Stereo)
Features	3D Comb Filter + Video Noise Reduction
Power consumption	<25W
VESA Mounting	VESA 100mm × 100mm
Auto adjustment	Yes
OSD Control	Yes - Auto adjust, Brightness, Contrast, Hori. / Vert. Position, Clock, Phase, Color, Language
Panel Life	50,000 Hours
Working Temp	32~104ºF (0~40ºC)
OSD Language	English, Spanish, French, Korean, Chinese
NDAA Compliant	YES
Accessories	Remote Control, Power Cord, Power Adapter, Stand, Quick Start Guide
Dimensions / Weight	Without Stand: 20.01" × 12.04" × 1.86" (508.35 × 305.93 × 47.2mm / 7.72lb / 3.5k