

VTM-TLM43DP-4K | VTM-TLM55DP-4K

Transcendent 43" & 55" 4K Professional Security LED Monitors with HDMI, and Display Port




KEY FEATURES


- 43" or 55" TFT-LED Display with 16:9 Aspect Ratio
- Resolution up to 3840 × 2160 (8MP / 4K)
- HDMI Inputs (× 3), and Display Port (DP)
- Picture-in-Picture (PIP) and Multi-Input Display Support
- Integrated Stereo Speakers (2 × 10W)
- Ultra-Slim Bezel Design with 178° Wide Viewing Angle
- 3D Comb Filter and De-interlacing Support for Clear, Stable Images
- NDAA Compliant and Built for Demanding Security Environments
- VESA Standard Mounting Compatible (200x100mm)
- Industrial Power Supply Included
- Professional Grade Security Monitors Designed for 24/7 Continuous Use with 50,000+ Hour Panel Life
- 3-Year Warranty



REAR CONNECTIONS

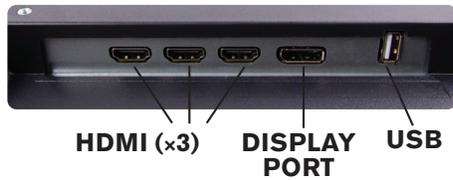

DIMENSIONS

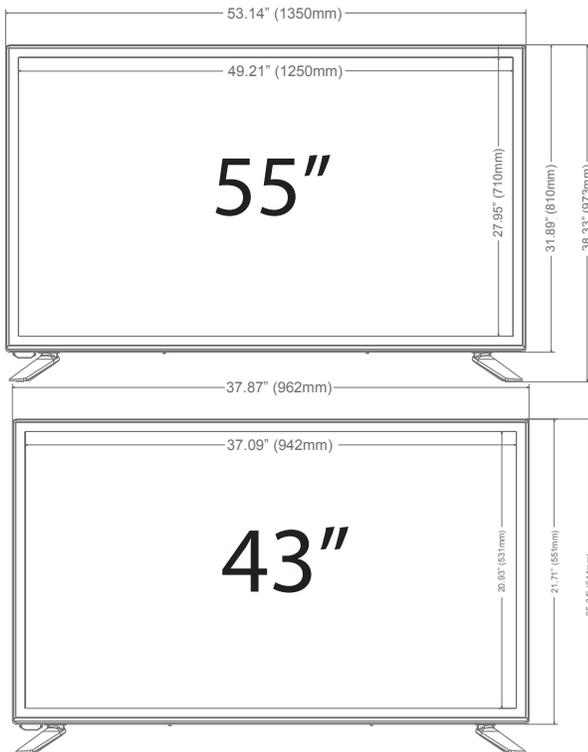

A PROFESSIONAL SECURITY MONITOR BUILT FOR DEMANDING 24/7 SURVEILLANCE ENVIRONMENTS

The VITEK Transcendent Series "DP" 4K Professional Security Monitors deliver crystal-clear Ultra HD performance with industrial-grade reliability. Available in 43" and 55" models, both feature a slim-bezel design, wide 178° viewing angle, and a long-life LED panel rated for 50,000+ hours of continuous use. Designed for mission-critical security applications, these NDAA-compliant monitors include multiple HDMI, and Display Port, integrated stereo speakers, and VESA mounting options for flexible installations. Complete your security system with monitors engineered to match the quality and performance of VITEK's professional video solutions.

VTM-TLM43DP-4K | VTM-TLM55DP-4K



| SPECIFICATIONS | VTM-TLM43DP-4K | VTM-TLM55DP-4K |
|------------------------|---|---|
| Screen Size / Type | 43" TFT LED Backlit | 55" TFT LED Backlit |
| Active Display Area | 37.05" (W) × 20.83" (H) | 47.6" (W) × 26.79" (H) |
| Resolution | 3840 × 2160 (4K UHD) | |
| Aspect Ratio | 16:9 | |
| Display Color | 1.073G | |
| Pixel Pitch (mm) | 0.294(H) × 0.294(V) | 0.315(H) × 0.315(V) |
| Brightness (nits) | 350 cd/m ² | 450 cd/m ² |
| Contrast Ratio | 1000:1 | 4000:1 |
| Viewing Angle | 178°(H) / 178°(V) | |
| Response Time | 5ms | |
| Inputs | 3 × HDMI (2.0) , 1 × DP (Display Port), 1 × USB, 1 × PWR | |
| Speaker | 2 × 3W (Stereo) | |
| Color System | PAL / NTSC / SECAM | |
| OSD Control | Auto adjust, Brightness, Contrast, H/V Position, Clock, Phase, Color, Language | |
| Additional Features | Picture in Picture (PiP) Display, Anti-static, Anti-Magnetic Field, Anti-Interference, No Radiation | |
| 3D Comb Filter | Yes | |
| Video Noise Reduction | Yes | |
| Power Supply | AC100V–240V, 50/60Hz | |
| Power Consumption | 40W | 50W |
| Mounting | Stand mount, VESA mount | |
| VESA Mount Standard | 100 × 200mm | |
| Rated Usage - Lifespan | 50,000+ Hours of 24/7 Continuous Use | |
| OSD Languages | English, Spanish, French, German, Italian, Dutch, Russian, Chinese | |
| Accessories Included | Industrial PSU, Screw, Cable Holder, Quick Start Guide | |
| Working Temperature | -22°F ~ 185°F (-30°~+85°C) | |
| Dimensions (W x H x D) | 37.87" × 21.71" × 3.64" (without stand) 37.87" × 25.34" × 7.50" (with stand) | 53.15" × 31.89" × 3.64" (without stand) 53.15" × 38.33" × 7.50" (with stand) |