


VT-TKBD23

Transcendent VMS-Integrating Network IP Keyboard Controller with 10" LCD Display and 4D Vector Operation [preliminary specs]



VITEKCCTV.COM
(888) VITEK-70

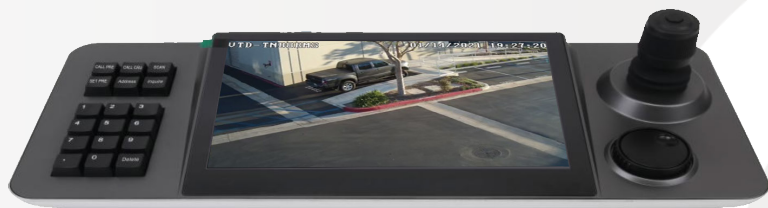

OVERVIEW

The Transcendent VT-TKBD23 represents an evolution in Android-based IP keyboard controllers from VITEK. A built-in 10" LCD display with a capacitive touch screen and a straightforward UI makes for ease of use. Real-time imagery can be viewed on the 10" display, with the image also transmitted to an external monitor via HDMI.

This model supports H.265: 1 CH 4K@30fps, H.264: 1 CH 1080P@60fps and 4 CH 720P@30fps decoding. Its four-dimensional joystick is ideal for PTZ control and rapid target positioning. Ideal for applications where multiple PTZs are in use with LAN-supported ONVIF protocols



KEY FEATURES

- Integrates with Transcendent VMS
- 10.1" Capacitive Touch Screen
- Android 6.0 Operating System
- H.264 / H.265 Decoding
- Maximum 4 Screen Display Mode
- Supports Viewing Images on Touch Screen or Outputting Images on the External Monitor via HDMI Interface
- Supports Network Access to Full Range of VITEK PTZ Cameras
- Supports PTZ Control, Preset, Cruise and Track Setup and Calling
- ONVIF Protocol Supported
- Up to 1024 devices can be Added
- Supports USB Flash Disk Upgrade, USB Mouse
- 3 Year Warranty

SPECIFICATIONS

Screen Size	IPS 10.1 Inch Screen, 1280*800 Capacitive Touch Screen
Display	HDMI 4K@30fps
Decoding Capability	Max. H.265 1CH 4k@30fps Max. H.264 1CH 1080p@60fps 4CH 720p@30fps
Protocol	ONVIF 2.4
Function	Up to 1024 Devices can be Added PTZ Control: Calling or Setting Preset, Cruise, Scan, etc.
System Settings	Supports Language Settings, Password Modification and USB Flash Disk Upgrade
Power	Standard Type A 5.5mm OD / 2.1mm ID Power Interface, DC 12V2A±10%
Interfaces	1 × RJ45 Ethernet Port 1 × RS485 1 RS232 1 × HDMI Output (V 1.3) 1 × USB2.0 Port 1 × Standard 3.5mm Headphone Jack
Operation Interface	4D Joystick, Buttons
Power Consumption	<15W
Standby Current	<100mA
Working Humidity	10%-90%(RH)
Working Temperature	14~104°F (-10~40°C)
Storage Temperature	-40~140°F (-40°~60°C)
Dimensions	17.5 × 7.01 × 4.65" / 445 × 179 × 118mm
Weight Net, (Shipping)	3.06lbs / 1.38kg, (5.29lbs / 2.4kg)

DIMENSIONS

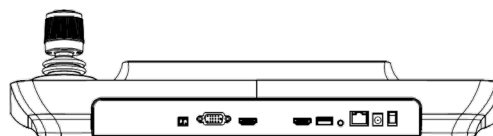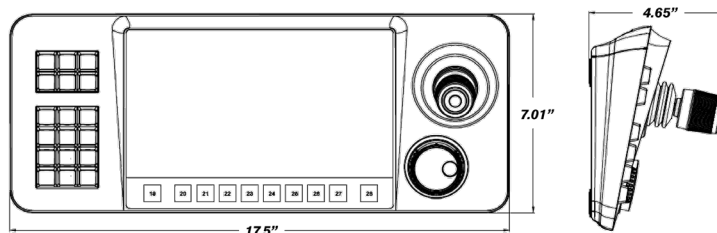

(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

An Eye On
Innovation