

VTD-TND6FEA-2

Transcendent Series 6 MegaPixel Fixed Lens IP WDR
Vandal Dome Camera with Programmable Analytics



KEY FEATURES

- 1/2.5" 6.0 MegaPixel CMOS Image Sensor
- Up to 20fps@6MP (3200 × 1800), Up to 30fps@4MP (2688 × 1520)
- 2.8mm Fixed Iris Lens
- Matrix IR / White Light (up to 100' Range)
- True Wide Dynamic Range (120dB)
- True Mechanical Day/Night function by ICR
- XD-DNR (3D & 2D-DNR) Noise Reduction
- Programmable Analytics: Line crossing / Region Intrusion Detection (by human / vehicle classification), Object Abandoned / Missing, Scene Change Detection, Video Blur, Video Color Cast Detection
- H.265+ / H.265 / H.264+ / H.264 / MJPEG
- MicroSD Card Slot for Local Recording (Up to 256GB)
- 1 Ch. Audio In + Built-in Mic*
- Remote Viewing via VMS, Web Browser, and iOS & Android Apps
- ONVIF Compliant
- IP67 Weather Resistance + IK10
- Optional Junction Box (VT-TJB03A), Wall Mount (VT-TWMT3), Pendant Mount (VT-TPDM-1 [reqs. VT-TJB03A]) and In-Ceiling Semi Flush Mount (VT-TFMT-S) Available [See Additional Mounting Options Below]
- 12VDC & PoE (Power over Ethernet) Operation
- 3-Year Warranty

*Please research local, state and federal laws regarding the implementation of audio surveillance.


TRANSCENDENT ANALYTICS!



OBJECT TRACKING
Track Objects Removed
from or Abandoned in
Secure Areas



AREA
Fully Programmable
Regional Intrusion
Detection



LINE CROSSING
Track People or
Vehicles Entering /
Exiting Designated
Areas

RELATED PRODUCTS & ACCESSORIES



Pair with one of several VITEK Transcendent Series Network or Digital Recorders offering a Myriad of Advanced Analytic Functions and Applications. See www.vitekccv.com for More!

Firmware and Features may be upgraded periodically – Please contact your VITEK Representative for complete information on updates and downloads.



VT-TJB03A
Optional Junction box for
Cable Management



VT-TFMT-S
In-ceiling Semi-flush
Mount



VT-TPDM-1
Pendant Mount (VT-
TJB03A Req)



VT-TWM04X
Wall Mount Bracket



VT-TPLMT
Universal Pole Mount
Adapter (VT-TJB03A Req)



VT-TCNMT
Universal Corner Mount
Adapter (VT-TJB03A Req)



VT-TWMT3
Wall Mount

BREAKDOWN OF MODEL NUMBERS - EXAMPLE: VTC-TND6FEA-2

[VTC]	[T]	[N]	[D]	[6]	[F]	[E]	[A]	[2]
VITEK	TRANSCENDENT	Network	Dome	6MP	Fixed	Entry	Second	2.8mm
Camera						Level	Iteration	



TRANSCENDENT



NETWORK



INTEGRATED
AUDIO



6 MEGAPIXEL



MATRIX IR +
WHITE LIGHT



FIXED IRIS LENS




PROGRAMMABLE
ANALYTICS



TRANSCENDENT SERIES NDAA COMPLIANT IP CAMERAS WITH PROGRAMMABLE ANALYTICS!

Transcendent Series NDAA Compliant High Definition 6 Megapixel IP Network Cameras offer unprecedented performance and value. These simple, easy to install, attractively styled, IP Network Cameras transmit over remote viewing via VMS, Web Browser, and iOS & Android Apps. These models also feature enhanced night vision using White Light emitters.

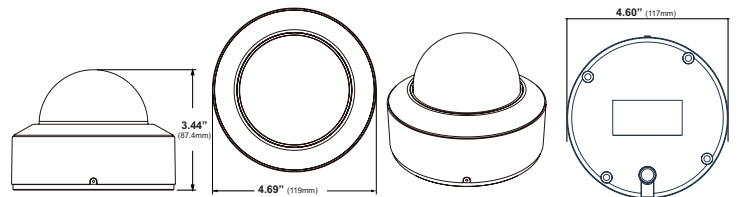

An Eye On
Innovation



www.vitekccv.com



DETAILED SPECIFICATIONS

Image Sensor	1/2.5" CMOS
Image Size	3200 × 1800
Electronic Shutter	1/4s ~ 1/100000s
Iris Type	Fixed Lens
Min. Illumination	0.008 lux @F1.6, AGC On, 0 lux with illumination on
Lens	2.8mm
Field Of View	Horizontal FoV: 104°, Vertical FoV: 55°, Diagonal FoV: 128°
Supplemental Light Range	IR range: up to 100', White light range: up to 100'
Day & Night	ICR
Wide Dynamic Range	120dB
BLC	Yes
HLC	Yes
Digital NR	Yes
S/N Ratio	50dB
Angle Adjustment	Pan: 0°~355°, Tilt:0°~70°, Rotation: 0°~180°
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264, Sub /Third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	6MP (3200 × 1800), 4MP (2688 × 1520), 1080P (1920 × 1080), 720P (1280 × 720), D1, VGA (640 × 480), 480 × 240, CIF
Main Stream	60Hz: 6MP(1~20fps) /4MP/1080P (1~30fps) 50Hz: 6MP(1~20fps) /4MP/1080P (1~25fps)
Sub Stream	720P/D1/VGA/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Third Stream	D1/480 × 240/CIF (60Hz: 1~30fps; 50Hz: 1~25fps)
Bit Rate	64 Kbps ~8Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
Audio Compression	G711A/U
ROI	Each ROI to be configured separately
Network	RJ45
CVBS	No

Audio	1CH audio input, 1CH built-in MIC*
Storage	Built-in micro SD card slot, up to 256GB
Reset	Yes
Remote Monitoring	Web browser / Transcendent NVR / VMS / Mobile App
Web Browser	Chrome 89.0+ / Edge 89.0+ / Firefox 87.0+ / Safari 14.0+
Online Connection	Supports simultaneous monitoring for up to 6 users, Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, RTMP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPS, HTTP POST, P2P, QoS
Interface Protocol	ONVIF
Smart Alarm	Motion detection, SMD, SD card error, SD card full, IP address conflict, network disconnection, video exception
Programmable Analytics	Line crossing / Region Intrusion Detection (by human / vehicle classification), Object Abandoned / Missing, Scene Change Detection, Video Blur, Video Color Cast Detection
More Features	Watermark, IP address filtering, video mask, heartbeat, ANR, cloud upgrade, smart supplement light, corridor pattern
PoE	Yes (IEEE802.3af)
Ingress / Impact Protection	IP67 Weather Protection + IK10 Impact Rating
Security	Video encryption, firmware encryption, HTTPS encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/RTSP
DORI	Detect: 218ft(66m) Observe: 87ft(27m) Recognize: 44ft(13m) Identify: 23ft(7m)
Power Supply	DC12V/PoE
Power Consumption	≤6.5W
Operating Conditions	-22°F~140°F (-30°C ~ 60°C), Humidity: less than 95 % (non-condensing)
Dimensions	Ø4.69 × 3.44" (119 × 87.4mm)
Weight (Net, Gross)	1.65lbs / 24.46oz / .75kg, 1.87lbs / 29.98oz / .85kg
Installation	Ceiling mounting, wall mounting - see page 1
Certificates	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)



*Please research local, state and federal laws regarding the implementation of audio surveillance.