



55-Inch / 0.88mm Ultra Slim Bezel / 1080p Full HD

VW55CD-OD-40008

VIDEO WALL DISPLAY

GVision's 55-inch **ultra slim bezel 0.88mm** video wall displays create visually stunning digital wall that is easily maintain and manage. With built-in processor, GVision's video wall able to display stretched images across entire monitor up to 10x10. Our commercial video wall is designed to operate 24/7. Combined with our standard / custom mounting system and our PC based video controle, GVision provides a complete video wall systems that's ideal for command & control centers, offices, shopping malls, stadiums, concert halls, and public transportation.



1920 x 1080p Full HD




HDMI Digital Input



Display Port Input



Built-In Processor



0.88mm Super Slim Bezel



Daisy Chain



Operate 24 / 7




LED Backlight Unit



3-Year Warranty

0.88MM ULTRA SLIM BEZEL VIDEO WALL DISPLAY

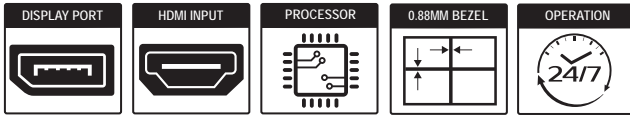

COLOR CALIBRATION

Factory tune to manage brightness and color uniformity conveniently with Color Calibration Suite software probe sensor hardware



Factory tuning color calibration of white balance



After calibrate and fine tuned white balance




ULTRA SLIM BEZEL

Ultra Slim 0.88mm bezel construction makes this public transportation display system attractive for close range viewing on indoor installations. Also available 3.5mm thin bezel and 1.8mm Slim bezel.

DIMENSION

Unit: Inch

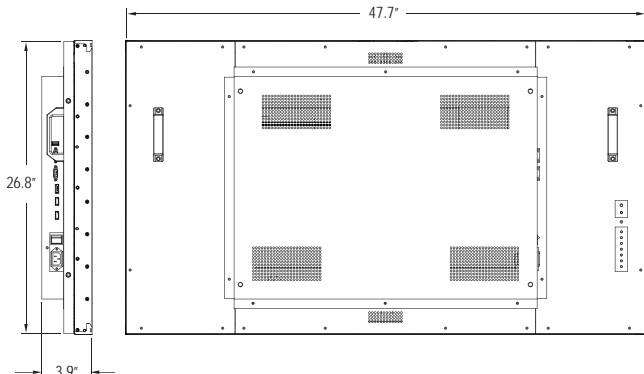

FEATURES

- 0.88mm Ultra Slim Bezel
- Built-In Video Processor for Daisy Chain
- Display 4K Content Over 2 x 2 Video Wall
- Configurable Up To 10 x 10 Screens
- Design for 24 / 7 / 365 Operation
- Scissor, Swing Door, Floor Stand, Custom Design Mount

SPECIFICATIONS

| DISPLAY | VW55CD-OD-40008 |
|----------------|-------------------------|
| Screen Size | 55 In |
| Resolution | 1920 x 1080 |
| Bezel Width | 0.88mm (0.44mm L/R/T/B) |
| Aspect Ratio | 16 : 9 |
| Viewing Angle | 178° / 178° |
| Brightness | 500cd/m ² |
| Contrast Ratio | 1400 : 1 |
| LCD Technology | Commercial Grade IPS |

| INTERFACE | |
|------------------|-------|
| HDMI In / Out | 1 / 1 |
| Display Port In | 1 |
| RS-232C In / Out | 1 / 1 |

| FEATURES | |
|--------------------|---------|
| Max. Daisy Chain | 10 x 10 |
| Built-In Processor | Yes |
| Auto Pixel Shift | Yes |
| White Balance | Yes |
| Cooling | Passive |
| Temperature Sensor | Yes |

| POWER | |
|--------------------|-------------------------|
| Consumption | < 280W BTU: 996 |
| Electrical Ratings | AC 100V ~ 240V, 50/60Hz |

| TEMPERATURE | |
|-------------|-------------------------------|
| Operating | 32° F ~ 122° F (0° C ~ 50° C) |

| DIMENSIONS (WxHxD) | |
|--------------------|-------------------|
| Inch (in) | 47.7 x 26.8 x 3.9 |

| WEIGHT | |
|------------|-----------------|
| Net Weight | 77.2 lbs (35kg) |

| VESA™ | |
|-----------------|-----------|
| Mount Size (mm) | 600 x 400 |

| MOUNT OPTION | |
|--------------|---|
| Custom Mount | VW-S (Scissor), VW-SD (Swing Door), VW-FS (Floor Stand), VW-C (Custom Design) |

Specifications subject to change without any notice

OPTIMAL MOUNT & VIDEO WALL CONTROLLER

