

# VZ-55SNB

ViewZ®  
DRIVING VISUAL INNOVATION

## 55" SUPER NARROW BEZEL LED VIDEO WALL MONITOR



### VZ-55SNB ADVANTAGES

- 55" 1080p Video LED Wall Monitor
- Super Narrow **0.44 mm** Metal Bezel
- Supports Max 4K (3840x2160) @ 60 Video Signal & Serial Control Software
- Supports HDMI (2.0) In/Out, DVI-D In, DP In
- Supports HDCP 1.4 / 2.2
- Daisy Chain System - HDMI up to 15 x 15
- Auto Source & Power Recovery
- **Mullion Compensation Applied / Advanced Heat Management**
- **Landscape** or **Portrait** mode selectable
- **Multi Window Display** (PBP, PIP, Triple or Quad)
- Built to run 24/7/365
- 3-Year Warranty



| MODEL #                                         |                       | VZ-55SNB                                |
|-------------------------------------------------|-----------------------|-----------------------------------------|
| FEATURES                                        |                       |                                         |
| Screen Size                                     |                       | 55"                                     |
| Max. Resolution                                 |                       | 1920 x 1080 @60Hz                       |
| Pixel Pitch                                     |                       | 0.630 mm x 0.630 mm                     |
| Brightness                                      |                       | 500cd/m <sup>2</sup> (Typical)          |
| Contrast Ratio                                  |                       | 1100:1                                  |
| Aspect Ratio                                    |                       | 16 : 9 (1.78 : 1)                       |
| Viewing Angle (H/V)                             |                       | 178° / 178°                             |
| Display Color                                   |                       | 1.06 B (10 Bit)                         |
| Response Time                                   |                       | < 8 ms                                  |
| Active Display area ( H x V )                   |                       | 1209.63 mm × 680.35 mm                  |
| Color Gamut                                     |                       | 72 %                                    |
| INTERFACE                                       |                       |                                         |
| DVI-D In                                        |                       | 1                                       |
| DP In                                           |                       | 1                                       |
| HDMI (1.4) In                                   |                       | 1                                       |
| HDMI (2.0) In / Out (Daisy Chain)               |                       | 1 / 2                                   |
| USB In                                          |                       | 1 (Upgrade)                             |
| RS-232 (RJ-45) In                               |                       | 1 (Serial Control / IR Receiver)        |
| RS-232 (RJ-45) Out                              |                       | 1 (Serial Control)                      |
| Audio Out                                       |                       | 1                                       |
| SPECIAL FEATURES                                |                       |                                         |
| Bezel Width                                     | Top & Left Side       | 0.017" / 0.44 mm                        |
|                                                 | Bottom & Right Side   | 0.017" / 0.44 mm                        |
|                                                 | Active to Active Area | 0.034" / 0.88 mm (Bezel to Bezel)       |
| Advanced Anti-Image Residual Correlation        |                       | Support                                 |
| Landscape / Portrait Viewing Mode               |                       | Support                                 |
| Multi Window Display (PBP, PIP, Triple or Quad) |                       | Support                                 |
| Language                                        |                       | English, Spanish, French and Portuguese |


| REFRESH RATE                    |                                   |                                                                                                                                                           |
|---------------------------------|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| HDMI 1 (2.0) In                 |                                   | 3840 x 2160 @ 30Hz                                                                                                                                        |
| HDMI 2 (2.0) In / Out           |                                   | 3840 x 2160 @ 60Hz                                                                                                                                        |
| DP (1.2) In                     |                                   | 3840 x 2160 @ 60Hz                                                                                                                                        |
| DVI-D In                        |                                   | 1920 x 1080 @ 60Hz                                                                                                                                        |
| DIMENSIONS & WEIGHT             |                                   |                                                                                                                                                           |
| Outline Dimension (W x H x D)   |                                   | 47.65 x 26.81 x 4.66”<br>1210.51 x 681.22 x 118.5 mm                                                                                                      |
| Net Weight                      |                                   | 65.91 lb / 29.9 kg                                                                                                                                        |
| Gross Weight                    |                                   | 88.18 lb / 40.0 kg                                                                                                                                        |
| MOUNT                           |                                   |                                                                                                                                                           |
| VESA                            |                                   | 600 x (100 x 4) mm, M8 x 10 Screws                                                                                                                        |
| GENERAL                         |                                   |                                                                                                                                                           |
| Transmitter - IR Remote Control |                                   | YES                                                                                                                                                       |
| Power                           | Electrical Ratings<br>Consumption | AC100 ~ 240V (50/60Hz), 2.0 A<br>≤ 237 W / 0.5 W (Standby)                                                                                                |
| Operating Temperature           |                                   | 14 ~ 149°F / -10 ~ 65°C                                                                                                                                   |
| Operating Humidity              |                                   | 5 ~ 95% RH                                                                                                                                                |
| Storage Temperature             |                                   | 32 ~ 140°F / 0 ~ 60°C                                                                                                                                     |
| Regulations                     |                                   | FCC, NDAA, RoHS                                                                                                                                           |
| Warranty (Parts / Labor)        |                                   | 3 Year / 3 Year                                                                                                                                           |
| Compatible Mounts               | Wall                              | VZ-WM71, VZ-XMS                                                                                                                                           |
|                                 | Ceiling                           | VZ-CMKIT-04, VZ-CMKIT-07                                                                                                                                  |
|                                 | Free Standing Mount               | VZ-FSM2x2, VZ-FSM3x2                                                                                                                                      |
| Accessories                     |                                   | AC110V Power Cable x 1, HDMI Cable x 1,<br>Manual x1, CAT5 Cable (RS232) x 1,<br>Remote Controller x 1, IR Receiver x 1,<br>Converter (RJ45 to RS232) x 1 |

# VZ-55SNB


**ViewZ®**  
DRIVING VISUAL INNOVATION

## 55" SUPER NARROW BEZEL LED VIDEO WALL MONITOR

### DIMENSION

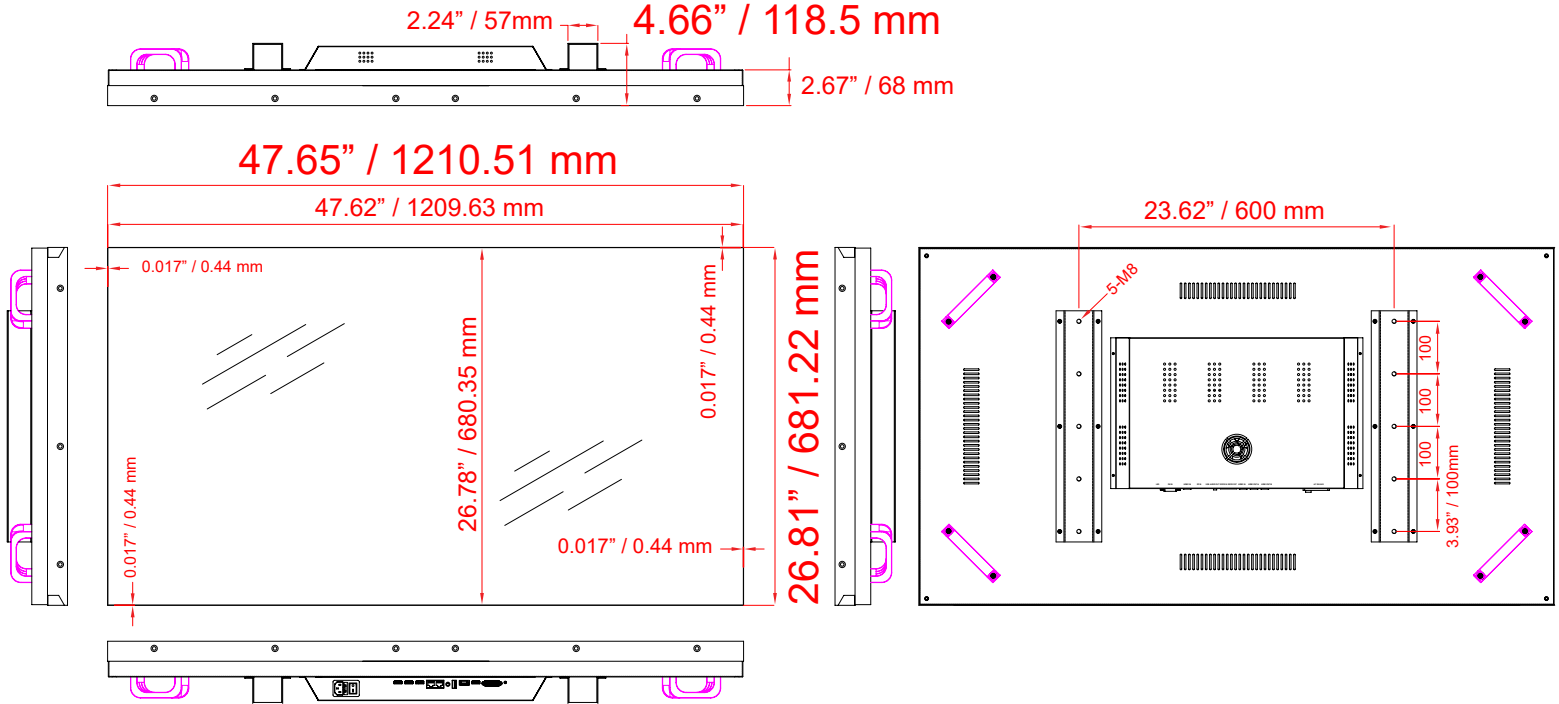

### INTERFACE

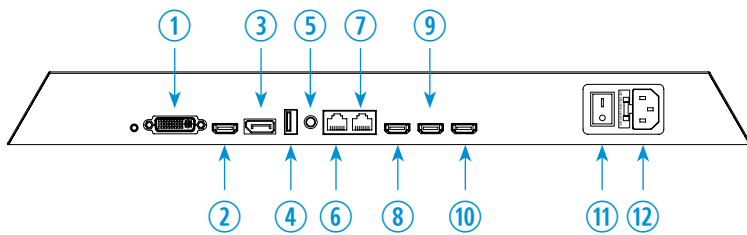

1. DVI-D IN
2. HDMI 1 IN
3. DP IN
4. USB - For upgrading SW
5. AUDIO OUT
6. RS232 (RJ-45) IN - Serial Control / IR Receiver
7. RS232 (RJ-45) OUT - Serial Control
8. HDMI 2 IN (Daisy Chain)
9. HDMI 2 OUT - A (Daisy Chain)
10. HDMI 2 OUT - B (Daisy Chain)
11. POWER ON / OFF Switch
12. AC 100-240V IN

### Contact ViewZ

- Address : 1030 N ARMANDO ST., ANAHEIM, CA 92806
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com