



VZ-75IBX-T ADVANTAGES

- 74.5" 4K UHD LED Panel
- Supports 4K (3840X2160) Resolution
- Supports HDMI, DP, YPbPr, AV, VGA
- Supports **Touch Screen**
- USB - **Media Player**
- Digital & Analog Inputs | HDMI & AV Loop-through
- Content Sharing
- Wide Viewing Angle (IPS Panel)
- Universal Wall Mounting & Auto Source Recovery


MODEL #		VZ-75IBX-T
VIDEO		
Screen Size		74.5"
Max. Resolution		3840 x 2160 @60Hz
Pixel Pitch		0.429 mm x 0.429 mm
Brightness		350cd/m ² (Typical)
Contrast Ratio		1200:1
Aspect Ratio		16 : 9 (1.78 : 1)
Viewing Angle (H/V)		178° / 178°
Display Color		1.07G
Response Time		< 8 ms
INTERFACE		
HDMI (2.0) In / Out		3 / 1
DP In		1
YPbPr In		1
CVBS (Composite) In / Out		1 / 1
VGA In (15Pin D-Sub)		1
SPDIF (Optical) Out		1
RS232 In		1
USB In (Media)		2 (USB 2.0)
USB In (PC/Android)		2
USB In (Touch)		2
RJ45 (10/100M) In		2
Audio Out		1
PC Audio In		1
ANDROID BOARD SPEC		
Android OS		Ver 8.0
CPU		Quad Core, ARM A73+A53, 1.5GHz
RAM		3GB DDR4
Storage		16GB (Nand-Flash)
GPU		MaliG51 (Nand-Flash)
SPECIAL FEATURES		
Image Retention		YES
Touch	Sensor Type	Infrared Touch Frame
	Surface Protection	4mm Toughened Glass
	Response Time	< 10ms
	Touch Accuracy	90% ± 1mm
	Output Mode	HID Standard
	Theory Clicks	Unlimited
	Minimum Touch Object	≥ 2 mm
USB Media Player	Video Codec	MPEG1/2, MPEG4, DivX 3.11/4.12/5.x/5, XviD, H.263, H.264, MVC, AVS, WMV3, VC1, Motion JPEG, VP8/9, RV30/40
	Video Format	MPEG, AVI, MOV, MP4, MKV, RM, 3GP, FLV, WebM, ASP
	Image Format	JPEG, PNG, BMP
	Music Format	mp3, mp4, wma

REFRESH RATE	
HDMI (2.0) In	3840 x 2160 @ 60Hz
DP In	3840 x 2160 @ 60Hz
VGA In (15Pin D-Sub)	1920 x 1080 @ 60 Hz
DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	68.34" x 40.72" x 4.08"
	1735.98 mm x 1034.52 mm x 103.75 mm
Net Weight / Gross Weight	141.20 lbs (64.05kg) / 173.72 lbs (78.8kg)
AUDIO	
Built in speaker	15W x 2
MOUNT	
Universal Wall Mount	600 x 400 mm (4 x M8)
GENERAL	
Transmitter - IR Remote Control	YES
Housing	Sheet Black Aluminium
Power	Electrical Ratings
	Consumption
	AC100 ~ 240V(50/60Hz)
	≤ 400 W / ≤ 0.5 W (Standby)
Operating Temperature	32 ~ 104°F / 0 ~ 40°C
Storage Temperature	14 ~ 140°F / -10 ~ 60°C
Operating Humidity	20 ~ 80% RH
Storage Humidity	10 ~ 80% RH
Regulations	FCC (A), RoHS
Language (OSD)	English
Accessories	Manual (1pc), Power Cable (1pc), USB A-B Cable (1pc), Remote Controller (1pc), Wall Mount (1set), Touch Pen (2pc), HDMI Cable (1pc) Mobile Stand (Option)





Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

DIMENSIONS

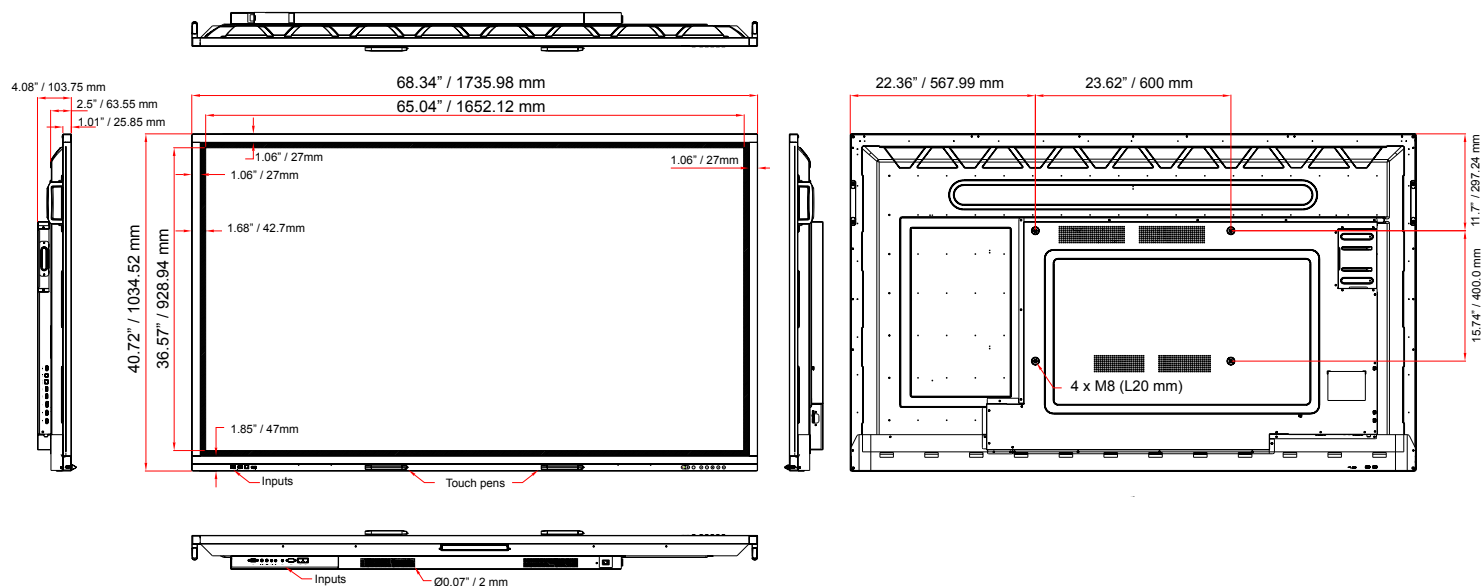

INTERFACE

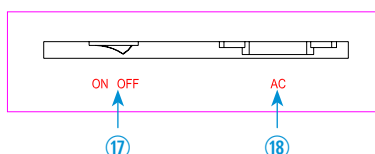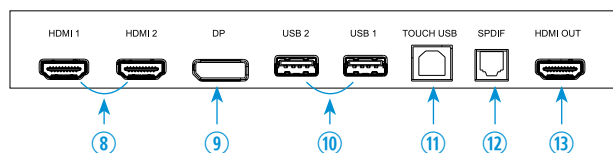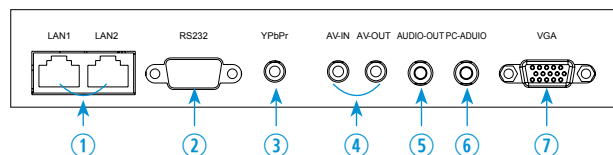

1. RJ-45 IN 1 & 2
2. RS232
3. Y Pb Pr IN
4. AV IN / OUT
5. AUDIO OUT
6. PC-AUDIO IN
7. VGA IN
8. HDMI IN 1 & 2
9. DP IN
10. USB IN (2.0) x 2
11. USB IN (Touch)
12. SPDIF
13. HDMI OUT
14. USB IN (PC&Media) x 2
15. USB IN (Touch)
16. HDMI IN
17. POWER ON/OFF
18. AC 100-240V IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.