


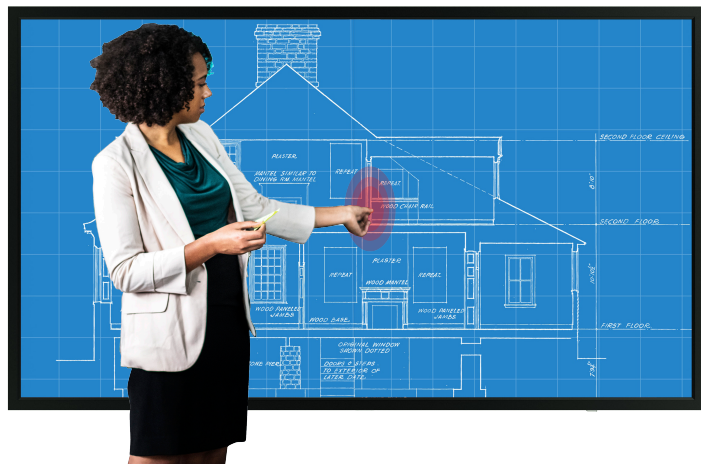

VZ-98IBX-T ADVANTAGES

- 97.52" 4K UHD LED Panel
- Supports 4K (3840X2160) Resolution
- Supports HDMI (2.0 & 1.4), YPbPr, AV, VGA
- Supports **Touch Screen**
- USB - **Media Player**
- Digital & Analog Inputs
- HDMI & AV Loop-through
- Wide Viewing Angle (IPS Panel)
- Universal Wall Mounting & Auto Source Recovery


MODEL #		VZ-98IBX-T
VIDEO		
Screen Size		97.52"
Max. Resolution		3840 x 2160 @60Hz
Pixel Pitch		0.5622 mm x 0.5622 mm
Brightness		500cd/m ² (Typical)
Contrast Ratio		1300:1
Aspect Ratio		16 : 9 (1.78 : 1)
Viewing Angle (H/V)		178° / 178°
Display Color		1.07G
Response Time		< 8 ms
INTERFACE		
HDMI (2.0) In / Out		4 / 1
HDMI (1.4) In		1
YPbPr In		1
AV In / Out		1 / 1
VGA In (15Pin D-Sub)		1
SPDIF (Optical) Out		1
RS232 (RJ-45) In		1
USB In (Media)		5 (USB 3.0 x 3 USB 2.0 x 2)
USB In (Under OPS - Mouse, Keyboard, U-Disk)		2
USB In (Touch)		1
RJ45 (10/100M) In		1
Audio Out		1
PC Audio In		1
ANDROID BOARD SPEC		
Android OS		Ver 5.0
CPU		Quad Core, Cortex-A53, 1.4GHz
RAM		2GB DDR3
Storage		8GB (Nand-Flash)
SPECIAL FEATURES		
Image Retention		YES
Touch	Sensor Type	Infrared Touch Frame
	Surface Protection	5mm Toughened Glass
	Response Time	< 15ms
	Touch Accuracy	90% ± 2mm
	Output Mode	HID Standard
	Theory Clicks	Unlimited
USB Media Player	Minimum Touch Object	≥ 6 mm
	Video Codec	MPEG1/2, MPEG4, DivX 3.11/4.12/5.x/5, XviD, H.263, H.264, MVC, AVS, WMV3, VC1, Motion JPEG, VP8/9, RV30/40
	Video Format	MPEG, AVI, MOV, MP4, MKV, RM, 3GP, FLV, WebM, ASP
	Image Format	JPEG, PNG, BMP
	Music Format	mp3, mp4, wma

REFRESH RATE	
HDMI (2.0) In	3840 x 2160 @ 60Hz
HDMI (1.4) In	3840 x 2160 @ 30Hz
VGA In (15Pin D-Sub)	1920 x 1080 @ 60 Hz
AUDIO	
Built in speaker	15W x 2
DIMENSIONS & WEIGHT	
Outline Dimension (W x H x D)	88.25" x 52.66 " x 4.58" 2241.66 mm x 1337.8 mm x 116.4 mm
Net Weight / Gross Weight	307.39 lbs (139.43 kg) / 424.72 lbs (192.65kg)
MOUNT	
Universal Wall Mount	800 x 600 mm (4 x M8)
GENERAL	
Transmitter - IR Remote Control	YES
Housing	Sheet Black Metal
Power	Electrical Ratings AC100 ~ 240V(50/60Hz) Consumption ≤ 480 W / ≤ 0.5 W (Standby)
Operating Temperature	32 ~ 104°F / 0 ~ 40°C
Storage Temperature	14 ~ 140°F / -10 ~ 60°C
Operating Humidity	20 ~ 80% RH
Storage Humidity	10 ~ 60% RH
Regulations	FCC (A), RoHS
Language (OSD)	English
Accessories	Manual (1pc), Power Cable (1pc), USB Cable (1pc), Remote Controller (1pc), Wall Mount (1set), Touch Pen (2pc), HDMI Cable (1pc) Mobile Stand (Option)


Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.

DIMENSIONS

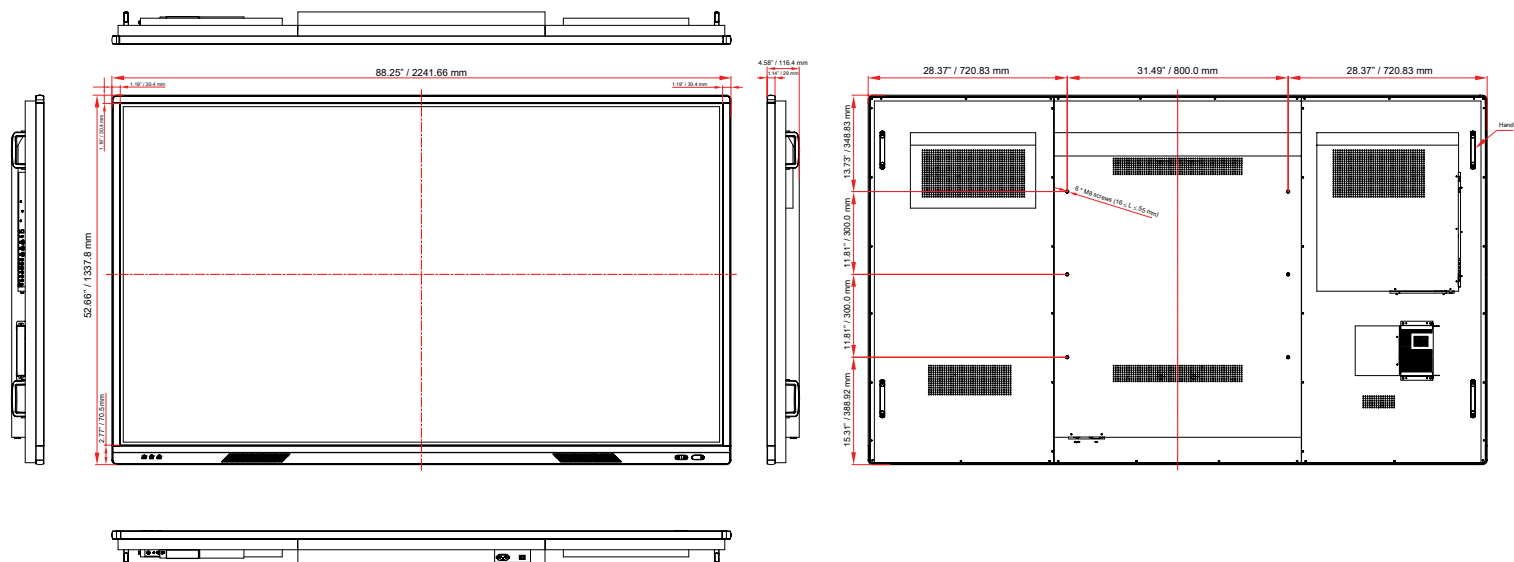

INTERFACE

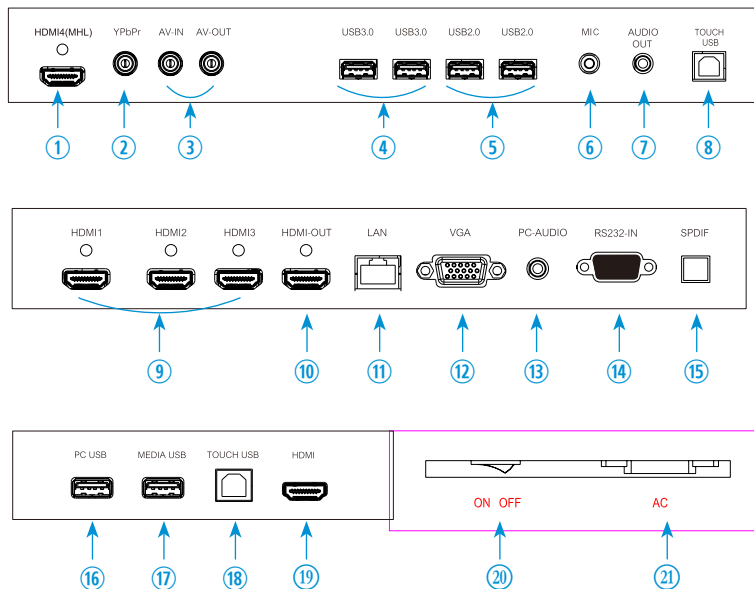

1. HDMI IN
2. Y Pb Pr IN
3. AV IN / OUT
4. USB IN (3.0) x 2
5. USB IN (2.0) x 2
6. MIC IN
7. AUDIO OUT
8. USB IN (Touch)
9. HDMI IN (x3)
10. HDMI OUT
11. RJ-45 IN
12. VGA IN
13. PC-AUDIO
14. RS232
15. SPDIF
16. USB IN (PC)
17. USB IN (Media)
18. USB IN (Touch)
19. HDMI In
20. POWER On/Off
21. AC 100-240V IN

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714) 996-1177, Fax : (714) 996-1138
- Sales : sales@viewzusa.com
- Specification subject to change without notice.