



WHD-PRO330-K

Full HD Wireless HDMI extender with Uni-directional IR Functionality and Extending distance up to 330 Feet

DIMENSIONS & WEIGHT:

Transmitter:
Length: 130mm/3.28in **Width:** 83.5mm/5.12in
Height: 26.5mm/1.04in **Weight:** 136g/4.8oz

Receiver:
Length: 130mm/3.28in **Width:** 83.5mm/5.12in
Height: 26.5mm/1.04in **Weight:** 136g/4.8oz

The **WHD-PRO330-K** is a wireless HDMI extender that transmits HDMI signals wirelessly. It supports video resolutions up to 1080p@60Hz and has a low latency of up to 300ms. The transmission distances reach up to 100 meters (330 feet) with a clear line of sight. It supports uni-directional IR functionality, allowing control of the source device from the receiver's location. The transmitter unit includes an HDMI loop output port for connecting a display at the source location. Compact design with an easy plug and play installation. Perfect for commercial and personal setups.

PACKAGE CONTENTS: 1x Transmitter, 1x Receiver, 1x IR Blaster cable, 1x IR Receiver cable, 2x Power Adapters, User Manual

KEY FEATURES:

- The WHD-PRO330 can extend HDMI signals wirelessly.
- Video resolutions up to 1080p@60Hz.
- Signal transmission distances up to 330ft/100 meters wirelessly (with a line of sight).
- Uni-directional IR pass-through for controlling the source device from the receiver's location.
- Compact design with an easy installation.
- Perfect for commercial and personal uses.

SPECIFICATIONS

CONNECTIVITY:

Transmitter:	
INPUT:	1 × HDMI [Type A, 19-pin female]
OUTPUT:	1 × HDMI [Type A, 19-pin female]
CONTROL:	1 × I/R [3.5mm Stereo Mini-jack]
Receiver:	
OUTPUT:	1 × HDMI [Type A, 19-pin female]
CONTROL:	1 × IR IN [3.5mm Stereo Mini-jack]

COMPLIANCES:

HDMI Compliance	: HDMI 1.3a
HDCP Compliance	: HDCP 1.4

EXTENDING DISTANCE:

1080P@60Hz:	: 330 Feet (L.O.S)
-------------	--------------------

VIDEO OUTPUT:

Video Resolutions	: Up to 1080p@60Hz
-------------------	--------------------

ADDITIONAL FEATURES

CEC Function	: No
ARC Function	: No
USB KVM Function	: No
PoC/PoE Function	: No
IR Control	: Yes
Downmix Function	: No
Downscale Function	: No
Over IP Function	: No
HDBaseT Function	: No
RS-232 Function	: No

LOOP-OUT/LOCAL PORT:

Has loop out port	: Yes
Number of Loop out ports	: 1

AUDIO SUPPORT:

HDMI Audio Formats	: PCM2.1/Dolby5.1
--------------------	-------------------



POWER:

Power Consumption	Tx : 3.6W (Max)
	Rx : 2.3W (Max)
Power Supply:	Input : AC 100-240V 50/60Hz
	Output : DC 5V/1A








CONNECTION DIAGRAM

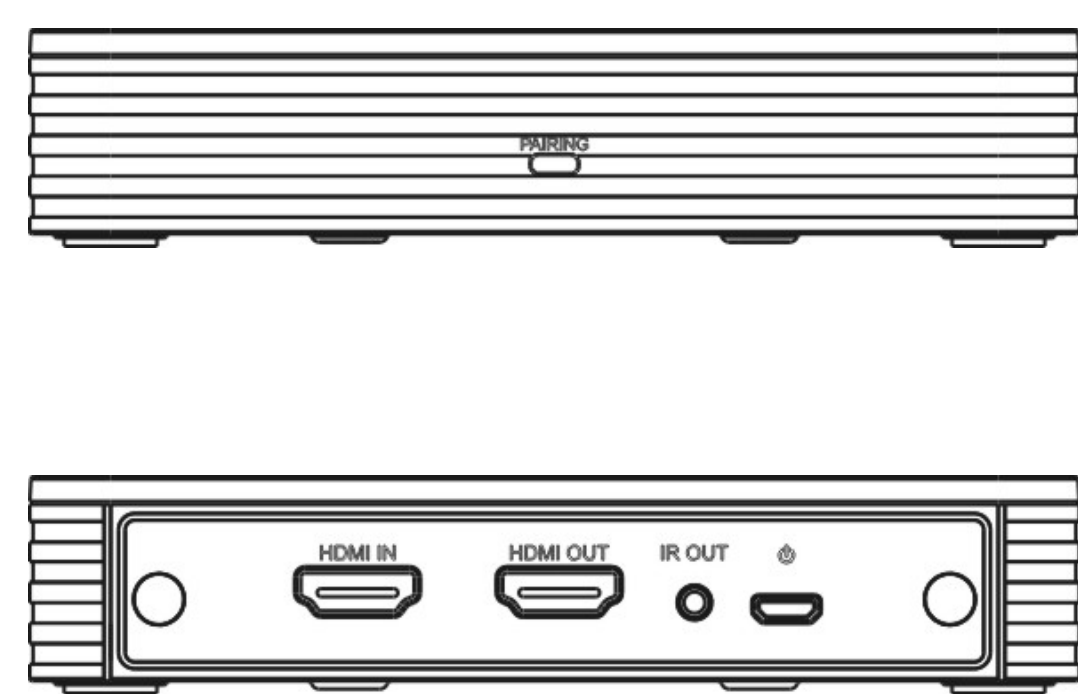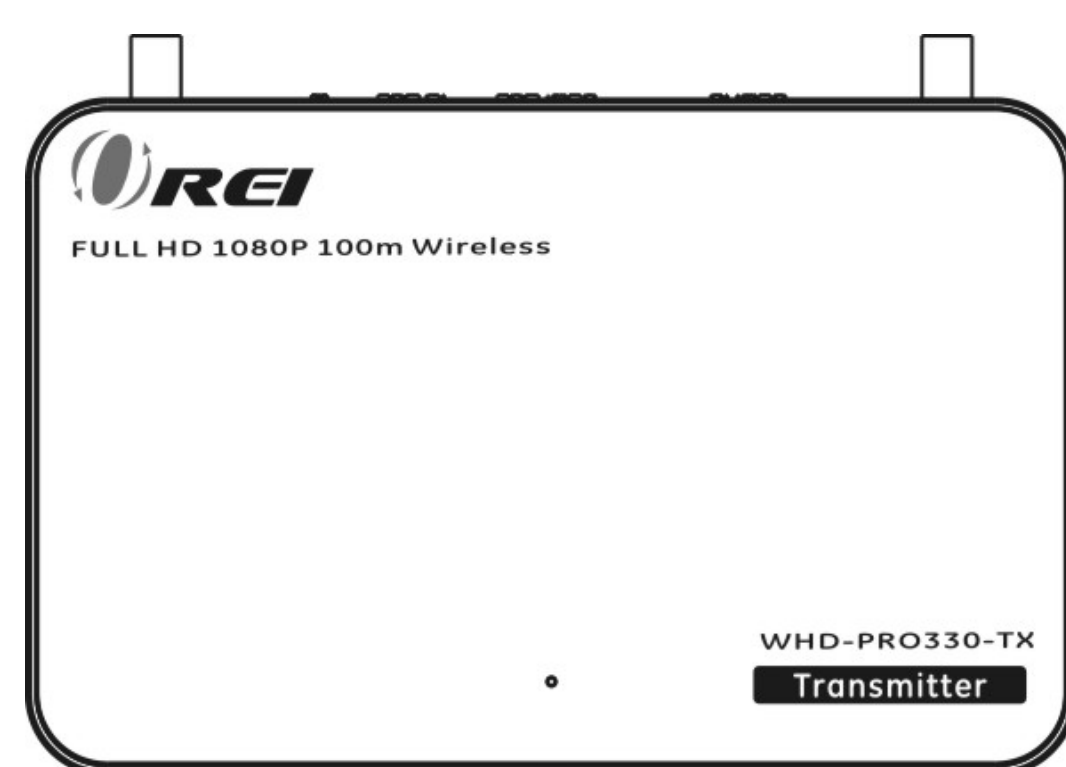

Transmitter

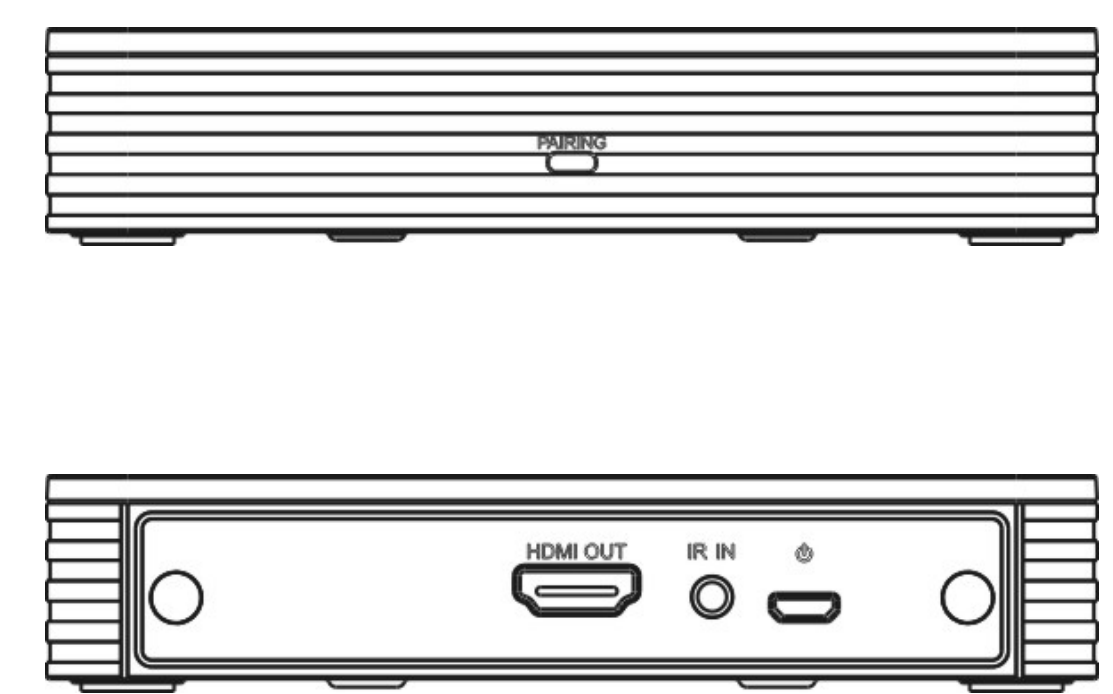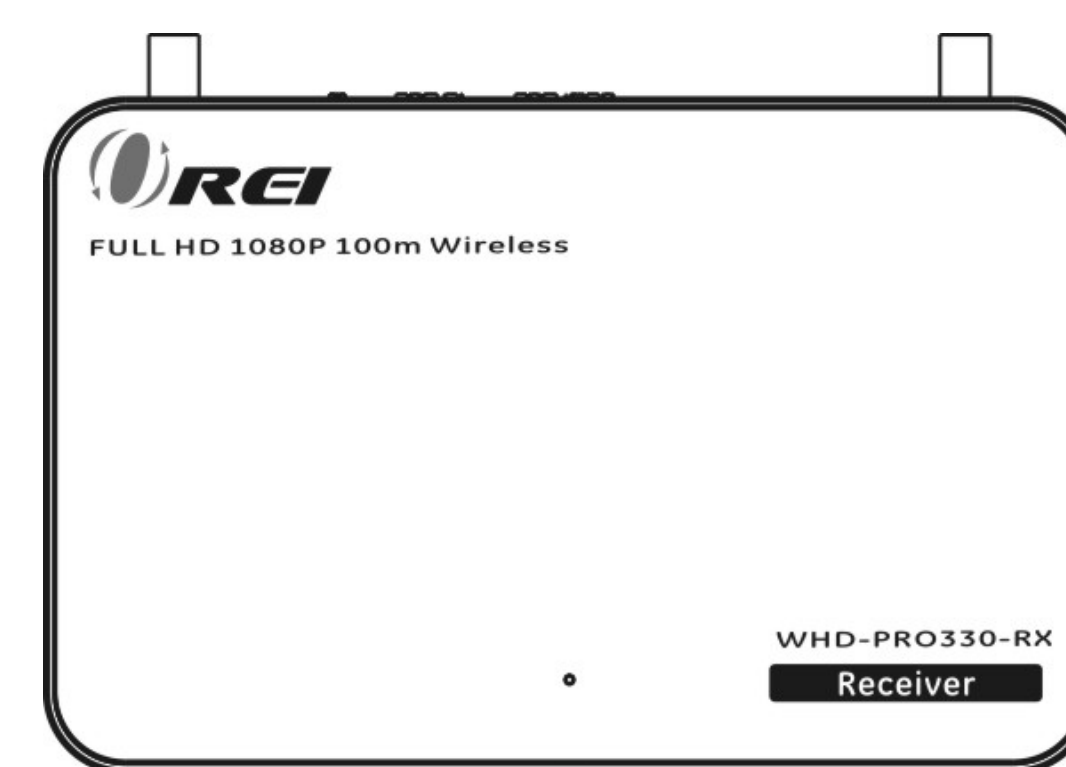

Receiver

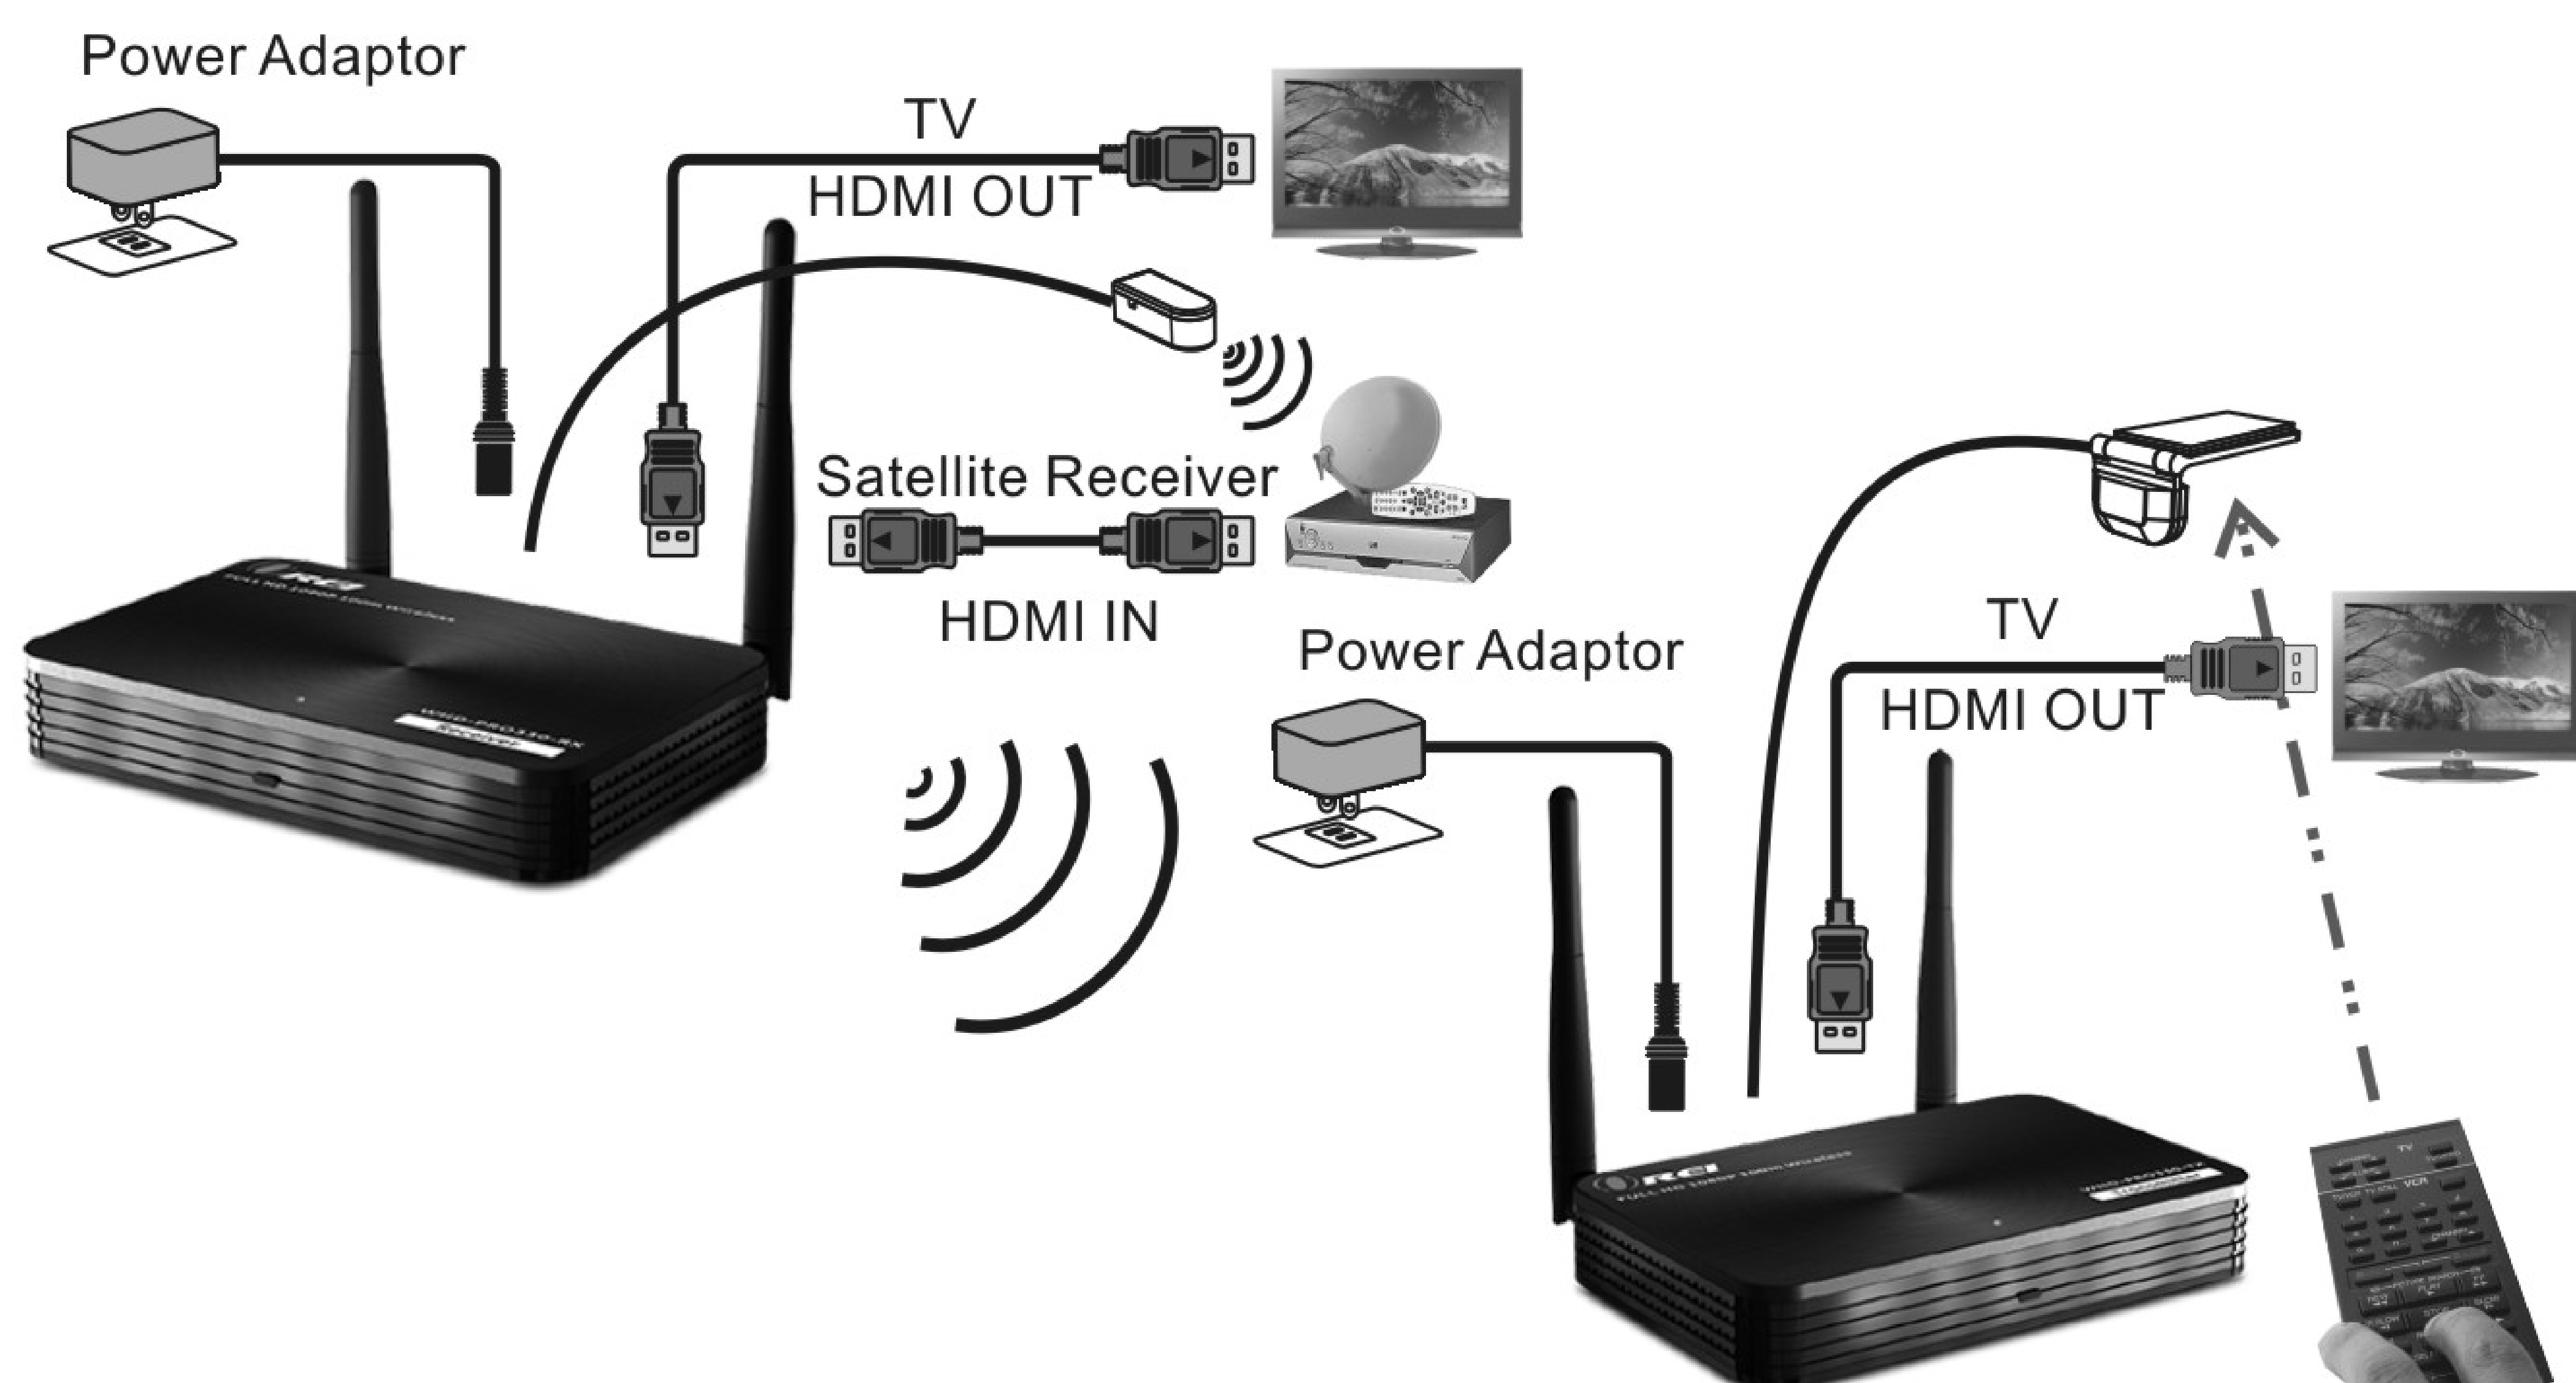

**OVER 10 YEARS
EXPERIENCE**



**FULL 1 YEAR
LIMITED WARRANTY**